


16-Port Dual Rail LCD KVM Switch

- Super A-Grade TFT LCD Panel
- Zero Dead Pixel Guarantee **



Diagram

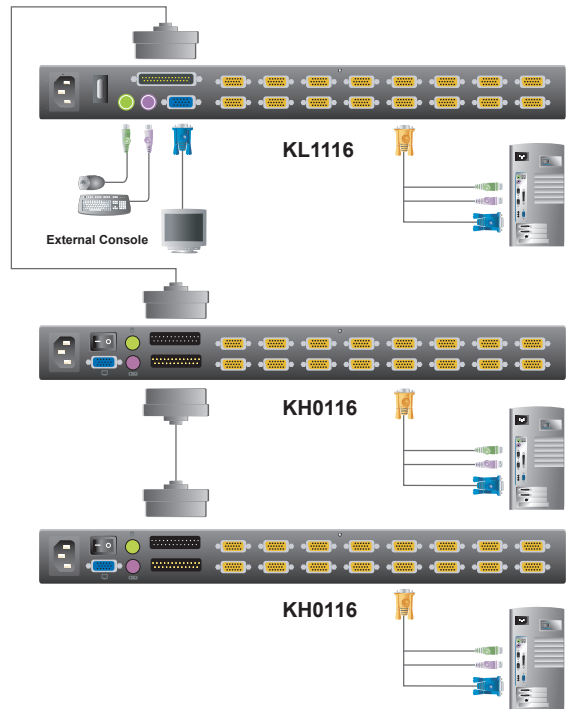

- Shared Access: 2 Local Users
- 2nd Console: PS/2
- Computers: SPHD, PS/2
- OS Support: Win, Linux, Unix, FreeBSD
- Expansion: Daisy Chain

- NEW OS Support: Vista

Features

- Integrated KVM console with 17" LCD monitor in a Dual Rail housing
- Space saving technology—up to two consoles (one bus) control up to 16 computers
- Dual Rail housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- Extra console port—manage computers in the LCD KVM switch from an external console (monitor, PS/2 keyboard, and PS/2 mouse)
- Dual Rail—LCD monitor slides independently of the keyboard/touchpad
- Console lock—enables the console drawer to remain securely locked away in position when not in use
- Dedicated Hotkey Mode and OSD Invocation Keys reduce the number of keystrokes and provide quick access to these functions
- Daisy chain up to 31 additional KVM switches to control up to 512 computers
- Auto Scan Mode enables continuous monitoring of user-selected computers
- Broadcast support—commands from the keyboard can be broadcast to all available computers on the installation
- Two level password security—only authorized users can view and control the computers—up to four users plus an administrator with separate profiles for each
- Port selection via Pushbutton, Hotkey and OSD
- DDC emulation—video settings of each computer are automatically adjusted for optimal output to the monitor
- Hot pluggable—add or remove computers without having to power down the switch
- Firmware upgradable

Specifications

Function		KL1116	
Computer Connections	Direct	16	
	Max.	512 (via Daisy Chain)	
Port Selection		Pushbutton, OSD, Hotkey	
Connectors	External Console Ports	Keyboard	1 x 6-pin Mini-DIN Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x 6-pin Mini-DIN Female (Green)
	KVM Ports		16 x SPHD-15 Female (Yellow)
	Daisy Chain Ports		1 x DB-25 Male (Black)
	F/W Upgrade		1 x RJ-11 Female (Black)
	Power		1 x 3-prong AC Socket
Switches	Reset		1 x Semi-recessed Pushbutton
	Port Selection		16 x Pushbutton
	Power		1 x Rocker
	F/W Upgrade		1 x Slide
	LCM adjustment		4 x Pushbutton
LEDs	On Line		16 (Green)
	Selected		16 (Orange)
	Power		1 (Blue)
	Lock	1 x Num Lock (Green)	
1 x Caps Lock (Green)			
1 x Scroll Lock (Green)			
Emulation	Keyboard/ Mouse	PS/2	
Video		1280 x 1024@ 75Hz; DDC2B	
Scan Interval		1–255 Seconds	
I/P Rating		100–240VAC, 50/60Hz; 1A	
Power Consumption		120V/24W; 230V/24W	
Environment	Operating Temp.		0–40 °C
	Storage Temp.		-20–60 °C
	Humidity		0–80% RH, Non-condensing
Physical Properties	Housing		Metal
	Weight		17.10 kg
	Dimensions (L x W x H)		68.00 x 48.20 x 4.40 cm (19"/1U)

* The specifications and pictures are subject to change without notice.