

MX Series 5G Universal Routing Platform Interface Module Reference

Published
2021-08-08

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

MX Series 5G Universal Routing Platform Interface Module Reference
Copyright © 2021 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

1

About This Guide | ix

Overview

Interface Module Overview | 2

MX Series Interface Module Overview | 2

DPCs Supported on MX Series Routers | 6

MX Series DPC Overview | 6

DPCs Supported on MX240, MX480, and MX960 Routers | 7

SPC Supported on MX Series Routers | 13

MX-SPC3 Services Card Overview and Support on MX240, MX480, and MX960 Routers | 13

MPCs Supported on MX Series Routers | 15

MX Series MPC Overview | 15

MPCs Supported by MX Series Routers | 16

MICs Supported on MX Series Routers | 26

MX Series MIC Overview | 26

MICs Supported by MX Series Routers | 27

MIC/MPC Compatibility | 45

FPCs and PICs Supported on MX Series Routers | 61

MX Series FPC and PIC Overview | 61

High Availability Features | 62

FPCs Supported by MX240, MX480, and MX960 Routers | 62

PICs Supported by MX240, MX480, and MX960 Routers | 63

Network Interface Specifications | 66

Determining Transceiver Support and Specifications | 66

Cable and Connector Specifications for MX and PTX Series Devices | 67

DPC, SPC, MPC, MIC, and PIC Descriptions

MX Series DPC Descriptions | 76

Gigabit Ethernet DPC with SFP | 77

Gigabit Ethernet Enhanced DPC with SFP | 80

Gigabit Ethernet Enhanced Ethernet Services DPC with SFP | 83

Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with SFP | 86

Gigabit Ethernet Enhanced Queuing IP Services DPCs with SFP | 89

10-Gigabit Ethernet DPC with XFP | 93

10-Gigabit Ethernet Enhanced DPCs with XFP | 96

10-Gigabit Ethernet Enhanced Ethernet Services DPC with XFP | 100

10-Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with XFP | 103

10-Gigabit Ethernet Enhanced Queuing IP Services DPC with XFP | 106

Multi-Rate Ethernet Enhanced DPC with SFP and XFP | 109

Multi-Rate Ethernet Enhanced Ethernet Services DPC with SFP and XFP | 113

Multi-Rate Ethernet Enhanced Queuing IP Services DPC with SFP and XFP | 117

Multiservices DPC | 121

Tri-Rate Enhanced DPC | 124

Tri-Rate Enhanced Ethernet Services DPC | 128

MX Series SPC Description | 132

MX-SPC3 Services Card | 132

MX Series MPC Descriptions | 139

MPC-3D-16XGE-SFPP | 140

Multiservices MPC | 144

MPC1 | 147

MPC1E | 149

MPC1 Q | 151

MPC1E Q	153
MPC2	155
MPC2E	157
MPC2 Q	159
MPC2E Q	161
MPC2 EQ	163
MPC2E EQ	165
MPC2E P	167
MPC2E NG	169
MPC2E NG Q	171
MPC3E	174
MPC3E-3D-NG	176
MPC3E-3D-NG-Q	178
32x10GE MPC4E	181
2x100GE + 8x10GE MPC4E	184
6x40GE + 24x10GE MPC5E	187
6x40GE + 24x10GE MPC5EQ	192
2x100GE + 4x10GE MPC5E	195
2x100GE + 4x10GE MPC5EQ	198
MPC6E	201
MPC7E-MRATE	204
MPC7E-10G	207
MPC8E	210
MPC9E	213
MPC10E-10C-MRATE	215
MPC10E-15C-MRATE	220

MX2K-MPC11E Modular Port Concentrator	224
MX Series MIC Descriptions	 234
ATM MIC with SFP	235
DS3/E3 MIC	240
Gigabit Ethernet MIC with SFP	246
Gigabit Ethernet MIC with SFP (E)	251
Gigabit Ethernet MIC with SFP (EH)	257
Gigabit Ethernet MIC with 256b-AES MACsec	260
10-Gigabit Ethernet MICs with XFP	264
10-Gigabit Ethernet MIC with SFP+ (10 Ports)	268
10-Gigabit Ethernet MIC with SFP+ (24 Ports)	271
10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports)	273
40-Gigabit Ethernet MIC with QSFP+	276
100-Gigabit Ethernet MIC with CFP	279
100-Gigabit Ethernet MIC with CXP	281
100-Gigabit Ethernet MIC with CXP (4 Ports)	283
100-Gigabit Ethernet MIC with CFP2	285
100-Gigabit DWDM OTN MIC with CFP2-ACO	289
Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP	300
Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP	309
Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H)	314
Channelized E1/T1 Circuit Emulation MIC	319
Channelized E1/T1 Circuit Emulation MIC (H)	323
Tri-Rate MIC	329
MIC MRATE	334
Multiservices MIC	338

SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP | 341

Multi-Rate Ethernet MIC | 348

Multi-Rate Ethernet MACSEC MIC | 355

SONET/SDH OC192/STM64 MIC with XFP | 360

MX Series PIC Descriptions | 365

Channelized OC12/STM4 Enhanced IQ (IQE) PIC with SFP | 366

Channelized OC48/STM16 Enhanced IQ (IQE) PIC with SFP | 367

SONET/SDH OC3/STM1 (Multi-Rate) PIC with SFP | 375

SONET/SDH OC12/STM4 (Multi-Rate) PIC with SFP | 380

SONET/SDH OC48/STM16 Enhanced IQ (IQE) PIC with SFP | 384

SONET/SDH OC48/STM16 (Multi-Rate) PIC with SFP | 390

SONET/SDH OC48/STM16 PIC with SFP | 394

SONET/SDH OC192c/STM64 PIC | 399

SONET/SDH OC192c/STM64 PIC with XFP | 404

3

Protocol and Application Support

DPC Protocol and Application Support for MX240, MX480, and MX960 | 409

Protocols and Applications Supported by DPCs and Enhanced DPCs (DPC and DPCE-R) | 409

Protocols and Applications Supported by Enhanced Ethernet Services DPCs (DPCE-X) | 420

Protocols and Applications Supported by Enhanced Queuing IP Services DPCs (DPCE-R-Q) | 428

Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) | 438

Protocols and Applications Supported by the Multiservices DPC (MS-DPC) | 445

SPC Protocol and Application Support for MX240, MX480, and MX960 | 449

Protocols and Applications Supported by MX-SPC3 Services Card | 449

**MPC Protocol and Application Support for MX240, MX480, MX960, MX2010, MX2020,
and MX10003 | 451**

Protocols and Applications Supported on MPCs for MX Series Routers | 451

Protocols and Applications Supported on the MPC1E for MX Series Routers | 473

Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E | **483**

Protocols and Applications Supported by the MPC3E on MX Series Routers | **499**

Protocols and Applications Supported on the MPC4E for MX Series Routers | **515**

Protocols and Applications Supported by the MPC5E for MX Series Routers | **530**

Protocols and Applications Supported by the MPC6E for MX2000 Routers | **543**

Protocols and Applications Supported by the MPC7E for MX Series Routers | **554**

Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers | **570**

Protocols and Applications Supported by the MS-MIC and MS-MPC | **584**

Protocols and Applications Supported by the MX10003 MPC (Multi-Rate) on the MX10003 Router | **587**

Protocols and Applications Supported by the JNP10K-LC2101 on the MX10008 and MX10016 Routers | **598**

Protocols and Applications Supported by the MPC10E | **615**

Protocols and Applications Supported by the MX2K-MPC11E | **634**

About This Guide

Use this guide as a reference for the interface modules (also known as line cards) supported by MX Series 5G Universal Routing Platforms, including Dense Port Concentrators (DPCs), Flexible Port Concentrators (FPCs), Physical Interface Cards (PICs), Services Processing Card (SPC), Modular Port Concentrators (MPCs) and Modular Interface Cards (MICs).

RELATED DOCUMENTATION

| [Junos OS Documentation](#)

1

PART

Overview

[Interface Module Overview](#) | 2

[DPCs Supported on MX Series Routers](#) | 6

[SPC Supported on MX Series Routers](#) | 13

[MPCs Supported on MX Series Routers](#) | 15

[MICs Supported on MX Series Routers](#) | 26

[FPCs and PICs Supported on MX Series Routers](#) | 61

[Network Interface Specifications](#) | 66

Interface Module Overview

IN THIS CHAPTER

- [MX Series Interface Module Overview | 2](#)

MX Series Interface Module Overview

Juniper Networks MX Series 5G Universal Routing Platforms process incoming and outgoing packets on several different types of interface modules (also known as line cards), including Dense Port Concentrators (DPCs), Flexible Port Concentrators (FPCs) with associated Physical Interface Cards (PICs), Trio Modular Port Concentrators (MPCs) with associated Modular Interface Cards (MICs). FPCs are populated with PICs for various interface types. DPCs and MPCs combine the functions of FPCs and the PICs, and with associated physical interfaces support a variety of interface types. The configuration syntax for each type of line card is the same: *type- fpc/pic/port*.

Switch Control Boards (MX-SCBs, MX-SCBEs, MX-SCBE2s, and SCB3s) provide full line-rate performance and redundancy without a loss of bandwidth for all MX series routers. Switch Fabric Boards (SFBs) provide increased fabric bandwidth per slot for MX2000 routers. Routing Engines (REs) and Control Boards with Routing Engines (CB-REs) provide the software processes that run Junos OS.

- Dense Port Concentrators (DPCs)—A DPC provides multiple physical interfaces and Packet Forwarding Engines on a single board that installs into a slot within the MX240, MX480, and MX960 routers. See the following topics for more information about DPCs:
 - ["MX Series DPC Overview" on page 6](#)
 - ["DPCs Supported on MX240, MX480, and MX960 Routers" on page 7](#)
- Modular Port Concentrators (MPCs) provide packet forwarding services. The MPCs are inserted into a slot in an MX240, MX480, MX960, MX2008, MX2010, and MX2020 router. MPCs for MX5, MX10, MX40, MX80, and MX104 routers install directly into the router chassis. Modular Interface Cards (MICs) provide the physical interfaces and install into the MPCs. You can install up to two MICs of different media types in the same MPC as long as the MPC supports those MICs. See the following topics for information about MPCs:
 - ["MX Series MPC Overview" on page 15](#)

- ["MPCs Supported by MX Series Routers" on page 16](#)
- ["MIC/MPC Compatibility" on page 45](#)
- ["Protocols and Applications Supported on MPCs for MX Series Routers" on page 451](#)
- ["Protocols and Applications Supported by the MPC3E on MX Series Routers" on page 499](#)
- ["Protocols and Applications Supported on the MPC4E for MX Series Routers" on page 515](#)
- ["Protocols and Applications Supported by the MPC5E for MX Series Routers" on page 530](#)
- ["Protocols and Applications Supported by the MPC6E for MX2000 Routers" on page 543](#)
- ["Protocols and Applications Supported by the MPC7E for MX Series Routers" on page 554](#)
- ["Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers" on page 570](#)
- ["Protocols and Applications Supported by the MS-MIC and MS-MPC" on page 584](#)
- ["Protocols and Applications Supported by the MX10003 MPC \(Multi-Rate\) on the MX10003 Router" on page 587](#)
- Modular Interface Cards (MICs) provide physical interfaces for the router. MICs install into Modular Port Concentrators (MPCs) which provide packet forwarding services. MICs and MPCs function similarly to PICs and FPCs. MPCs install vertically in the MX2020, MX2010, MX2008, and MX960 router chassis, and horizontally in the MX480 and MX240 router chassis. On MX5, MX10, MX40, MX80, and MX104 routers, MICs install directly into the router chassis. There are also fixed-configuration MPCs, with built-in network ports or services functionality, that do not accept MICs. The maximum number of supported MPCs varies per router and hardware configuration. See the following topics for information about MICs:
 - ["MX Series MIC Overview" on page 26](#)
 - ["MICs Supported by MX Series Routers" on page 27](#)
 - ["MIC/MPC Compatibility" on page 45](#)
- Flexible PIC Concentrators (FPCs) and Physical Interface Cards (PICs) function similarly to MICs and MPCs. PICs provide physical interfaces for the router, and install into FPCs, which provide packet forwarding services. FPCs are installed into a slot in an MX240, MX480, and MX960 router. See the following topics for information about PICs and FPCs:
 - ["MX Series FPC and PIC Overview" on page 61](#)
 - ["High Availability Features" on page 62](#)
 - ["FPCs Supported by MX240, MX480, and MX960 Routers" on page 62](#)

- ["PICs Supported by MX240, MX480, and MX960 Routers" on page 63](#)
- Switch Fabric Boards (SFBs) provide increased fabric bandwidth per slot. The MX2000 line of routers can support eight Switch Fabric Boards (SFB) and eight Enhanced Switch Fabric Boards (SFB2) but not both at the same time. The SFB is supported on MX2010 and MX2020 routers. See the following topics for information about SFBs:
 - *MX2000 Switch Fabric Board (SFB) Overview*
 - *MX2000-SFB2-5 Enhanced Switch Fabric Board Description*

- Switch Control Boards (SCBs) control power to MPCs, monitor and control system functions such as fan speed and the system front panel, and manage clocking, resets, and boots.

Depending on the MX chassis and the level of redundancy, the number of SCBs can vary. The MX240 and MX480 require two SCBs for 1+1 redundancy, whereas the MX960 requires three SCBs for 2+1 redundancy.

There are four generations of SCBs for MX Series 5G Universal Routing Platforms: SCB-MX, SCBE-MX, SCBE2-MX, and SCBE3-MX. See the following topics for more information about SCBs:

- *MX-Series Switch Control Board (SCB) Description*
- *SCBE3-MX Description*
- *SCBE2-MX Description*
- *SCBE-MX Description*
- *SCB-MX Description*
- MX-ADC is a special line card adapter (ADC) for line cards that were designed to work with the MX-SCB and MX-SCBE line cards (MPC1E, MPC2E, and MPC3E). It is supported only for MX2010 and MX2020 routers. The ADC is a hardware casing that fits into a line card slot. The MPCs attach to the ADCs which in turn attach to the backplane. See the following topics for more information about the MX-ADC:
 - *MX2000 Adapter Card (ADC) Description*
- Routing Engines (REs) and Control Boards with Routing Engines (CB-REs) provide the software processes that run Junos OS. The routing engine maintains the routing tables, manages the routing protocols used on the router, controls the router interfaces, controls some chassis components, and provides the interface for system management and user access to the router. Each CB-RE is a combined Routing Engine and Switch Control Board in one unit. See the following topics for information about REs and CB-REs for MX routers:
 - *MX2000 Host Subsystem CB-RE Description*

- *MX960 Routing Engine Description*
- *MX480 Routing Engine Description*
- *MX240 Routing Engine Description*
- *MX5, MX10, MX40, and MX80 Routing Engine Description*
- *RE-S-X6-64G Routing Engine Description*
- *RE-MX2000-1800x4 CB-RE Description*
- *REMX2K-X8-64G and REMX2K-X8-64G-LT CB-RE Description*
- *Routing Engine Specifications*

DPCs Supported on MX Series Routers

IN THIS CHAPTER

- [MX Series DPC Overview | 6](#)
- [DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

MX Series DPC Overview

A Dense Port Concentrator (DPC) provides multiple physical interfaces and Packet Forwarding Engines (PFEs) on a single board that installs into a slot within the MX240, MX480, and MX960 routers. The DPCs are optimized for Ethernet density and can support up to 40 Gigabit Ethernet or four 10-Gigabit Ethernet ports.

The DPC assembly combines packet forwarding and Ethernet interfaces on a single board, with four 10-Gbps Packet Forwarding Engines. Each Packet Forwarding Engine consists of one chip for Layer 3 processing and one Layer 2 network processor. The DPCs interface with the power supplies and Switch Control Boards (SCBs).

NOTE: In the Junos OS CLI, you use the FPC syntax to configure or display information about DPCs, and you use the PIC syntax to configure or display information about Packet Forwarding Engines on the DPCs.

DPCs install vertically in the MX960 router chassis and horizontally in the MX480 and MX240 router chassis. The maximum number of supported DPCs varies per router:

- MX960 router—up to 12 DPCs
- MX480 router—up to 6 DPCs
- MX240 router—up to 3 DPCs

When a slot is not occupied by a DPC, you must insert a blank DPC to fill the empty slot and ensure proper cooling of the system. For complete information about installing and handling DPCs, see the hardware guide for your router.

RELATED DOCUMENTATION

DPCs Supported on MX240, MX480, and MX960 Routers

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\) | 420](#)

[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\) | 428](#)

[Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs \(DPCE-X-Q\) | 438](#)

[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\) | 445](#)

DPCs Supported on MX240, MX480, and MX960 Routers

NOTE: These DPCs have all been announced as End of Life (EOL). The End of Support (EOS) milestone dates for each model are published at https://www.juniper.net/support/eol/mseries_hw.html.

Table 1 on page 7 lists the DPCs supported by the MX240, MX480, and MX960 routers.

Table 1: DPCs Supported in MX240, MX480, and MX960 Routers

DPC Name	DPC Model Number	Ports	Maximum Throughput per DPC	First Junos OS Release
Gigabit Ethernet				
"Gigabit Ethernet DPC with SFP" on page 77	DPC-R-40GE-SFP EOL (see PSN-2009-06-400)	40	40 Gbps	8.2

Table 1: DPCs Supported in MX240, MX480, and MX960 Routers (Continued)

DPC Name	DPC Model Number	Ports	Maximum Throughput per DPC	First Junos OS Release
"Gigabit Ethernet Enhanced DPC with SFP" on page 80	DPCE-R-40GE-SFP EOL (see PSN-TSB16810)	40	40 Gbps	8.4
"Gigabit Ethernet Enhanced Ethernet Services DPC with SFP" on page 83	DPCE-X-40GE-SFP EOL (see PSN-TSB16810)	40	40 Gbps	8.4
"Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with SFP" on page 86	DPCE-X-Q-40GE-SFP EOL (see PSN-2013-02-851)	40	40 Gbps	8.5
"Gigabit Ethernet Enhanced Queuing IP Services DPCs with SFP" on page 89	DPCE-R-Q-20GE-SFP EOL (see PSN-2013-02-851)	20	20 Gbps	9.1
"Gigabit Ethernet Enhanced Queuing IP Services DPCs with SFP" on page 89	DPCE-R-Q-40GE-SFP EOL (see PSN-2011-07-314)	40	40 Gbps	8.5

Table 1: DPCs Supported in MX240, MX480, and MX960 Routers (Continued)

DPC Name	DPC Model Number	Ports	Maximum Throughput per DPC	First Junos OS Release
"10-Gigabit Ethernet DPC with XFP" on page 93	DPC-R-4XGE-XFP EOL (see PSN-2009-06-400)	4	40 Gbps	8.2
10-Gigabit Ethernet				
"10-Gigabit Ethernet Enhanced DPCs with XFP" on page 96	DPCE-R-2XGE-XFP EOL (see PSN-2011-02-314)	2	20 Gbps	9.1
"10-Gigabit Ethernet Enhanced DPCs with XFP" on page 96	DPCE-R-4XGE-XFP EOL (see PSN-TSB16810)	4	40 Gbps	8.4
"10-Gigabit Ethernet Enhanced Ethernet Services DPC with XFP" on page 100	DPCE-X-4XGE-XFP EOL (see PSN-TSB16810)	4	40 Gbps	8.4

Table 1: DPCs Supported in MX240, MX480, and MX960 Routers (Continued)

DPC Name	DPC Model Number	Ports	Maximum Throughput per DPC	First Junos OS Release
"10-Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with XFP" on page 103	DPCE-X-Q-4XGE-XFP EOL (see PSN-2013-02-851)	4	40 Gbps	8.5
"10-Gigabit Ethernet Enhanced Queuing IP Services DPC with XFP" on page 106	DPCE-R-Q-4XGE-XFP EOL (see PSN-2011-02-314)	4	40 Gbps	8.5
Mult-Rate Ethernet				
"Multi-Rate Ethernet Enhanced DPC with SFP and XFP" on page 109	DPCE-R-20GE-2XGE EOL (see PSN-TSB16810)	22	40 Gbps	9.2
"Multi-Rate Ethernet Enhanced Ethernet Services DPC with SFP and XFP" on page 113	DPCE-X-20GE-2XGE EOL (see PSN-2011-02-314)	22	40 Gbps	9.2

Table 1: DPCs Supported in MX240, MX480, and MX960 Routers (Continued)

DPC Name	DPC Model Number	Ports	Maximum Throughput per DPC	First Junos OS Release
"Multi-Rate Ethernet Enhanced Queuing IP Services DPC with SFP and XFP" on page 117	DPCE-R-Q-20GE-2XGE EOL (see PSN-TSB16810)	22	40 Gbps	9.3
Tri-Rate Ethernet				
"Tri-Rate Enhanced DPC" on page 124	DPCE-R-40GE-TX EOL (see PSN-2013-02-851)	40	40 Gbps	9.1
"Tri-Rate Enhanced Ethernet Services DPC" on page 128	DPCE-X-40GE-TX EOL (see PSN-2011-07-315 .)	40	40 Gbps	9.1
Services				
"Multiservices DPC" on page 121	MS-DPC EOL (see PSN-TSB16812)	2 (Not supported)	-	9.3

RELATED DOCUMENTATION

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

Protocols and Applications Supported by Enhanced Ethernet Services DPCs (DPCE-X) | 420

Protocols and Applications Supported by Enhanced Queuing IP Services DPCs (DPCE-R-Q) | 428

Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) | 438

Protocols and Applications Supported by the Multiservices DPC (MS-DPC) | 445

SPC Supported on MX Series Routers

IN THIS CHAPTER

- [MX-SPC3 Services Card Overview and Support on MX240, MX480, and MX960 Routers | 13](#)

MX-SPC3 Services Card Overview and Support on MX240, MX480, and MX960 Routers

The MX-SPC3 Services Card is a Services Processing Card (SPC) that provides additional processing power to run Next Gen Services. The MX-SPC3 contains two Services Processing Units (SPUs) with 128 GB of memory per SPU. Line cards such as DPCs, MPCs, and MICs, intelligently distribute all traffic traversing the router to the SPUs to have services processing applied to it.

Next Gen Services provide the best of both routing and security features on MX Series routers MX240, MX480, and MX960. All Next Gen Services are provided by the MX-SPC3 Services Card. Next Gen Services provide capabilities for manipulating traffic before it's delivered to its destination.

NOTE: The only services card that supports Next Gen Services is the MX-SPC3.

[Table 2 on page 13](#) shows the SPC and its first supported Junos OS release on MX240, MX480, and MX960, routers.

Table 2: MX-SPC3 Supported by MX240, MX480, and MX960 Routers

SPC Name	SPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers
<i>MX-SPC3 Services Card</i>	JNP-SPC3	19.3R2

The MX-SPC3 services card is compatible end-to-end with the MX Series Switch Fabrics, Routing Engines and MPC line cards for MX240, MX480, and MX960 routers. See [Table 3 on page 14](#)

Table 3: MX-SPC3 Services Card Compatibility with MX Series Switch Fabrics, Routing Engines and MPC Line Cards

Switch Fabric	Route Engine	MPC Line Cards
SCBE	RE-S-1800X4-16G-UPG-BB	MPC2E-3D
	RE-S-1800X4-32G-UB	MPC2-3D-NG MPC3E and MPC3E-3D-NG MPC4E-3D MPC-3D-16XGE
SCBE2	RE-S-1800X4-16G-UPG-BB	MPC2E-3D
	RE-S-1800X4-32G-UB	MPC2-3D-NG
	RE-S-X6-64G-UB	MPC3E and MPC3E-3D-NG
	RE-S-X6-64G-S	MPC4E-3D
	RE-S-X6-64G-S-R	MPC5E and MPC5EQ
	RE-S-X6-64G-S-BB	MPC7E and MPC7EQ
	RE-S-X6-128G-S-S	MPC-3D-16XGE
	RE-S-X6-128G-S-R	
	RE-S-X6-128G-S-BB	

RELATED DOCUMENTATION

Protocols and Applications Supported by MX-SPC3 Services Card | 449

MPCs Supported on MX Series Routers

IN THIS CHAPTER

- [MX Series MPC Overview | 15](#)
- [MPCs Supported by MX Series Routers | 16](#)

MX Series MPC Overview

Modular Port Concentrators (MPCs) provide packet forwarding services. The MPCs are inserted into a slot in an MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 router. MPCs for MX5, MX10, MX40, MX80, and MX104 routers install directly into the router chassis. Modular Interface Cards (MICs) provide the physical interfaces and install into the MPCs. You can install up to two MICs of different media types in the same MPC as long as the MPC supports those MICs.

A specialized fixed configuration MPC provides higher port density over MICs and combines packet forwarding and Ethernet interfaces onto a single line card. The fixed configuration MPC is inserted into a slot in a router and contains no slots for MICs.

MICs receive incoming packets from the network and transmit outgoing packets to the network. During this process, each MIC performs framing and high-speed signaling for its media type. Before transmitting outgoing data packets through the MIC interfaces, the MPCs encapsulate the packets received. Each MPC is equipped with up to four Junos Trio chipsets, which perform control functions tailored to the MPC's media type.

You'll need to install a high-capacity fan tray to use an MPC. When a slot is not occupied by an MPC, you must insert a blank MPC to fill the empty slot and ensure proper cooling of the system. For complete information about installing and handling MPCs, see the hardware guide for your router.

The maximum number of supported MPCs varies per router and hardware configuration:

- MX2020 router—Up to 20 MPCs (For power requirements, see *Calculating AC Power Requirements for MX2020 Routers* and [Calculating DC Power Requirements for MX2020 Routers](#)).
- MX2010 router—Up to 10 MPCs (For power requirements, see *Calculating AC Power Requirements for MX2010 Routers* and *Calculating DC Power Requirements for MX2010 Routers*.)

- MX960 router—Up to 12 MPCs (For power requirements, see *Calculating Power Requirements for MX960 Routers*.)
- MX480 router—Up to six MPCs (For power requirements, see *Calculating Power Requirements for MX480 Routers*.)
- MX240 router—Up to three MPCs (For power requirements, see *Calculating Power Requirements for MX240 Routers*.)

MX80 router—One fixed 10GbE MIC with four ports for uplink connections.

NOTE: The MX80 router is available as a modular (MX80) or fixed (MX80-48T) chassis. Both chassis have a fixed Modular Interface Card (MIC) that has three 10GbE ports. The fixed MX80 router has an additional 48 10/100/1000Base-T RJ45 ports. The modular chassis has two dedicated slots for MICs.

RELATED DOCUMENTATION

[MPCs Supported by MX Series Routers | 16](#)

[Protocols and Applications Supported on MPCs for MX Series Routers | 451](#)

[Protocols and Applications Supported by the MPC3E on MX Series Routers | 499](#)

[Protocols and Applications Supported on the MPC4E for MX Series Routers | 515](#)

[Protocols and Applications Supported by the MPC5E for MX Series Routers | 530](#)

[Protocols and Applications Supported by the MPC6E for MX2000 Routers | 543](#)

[Protocols and Applications Supported by the MX2K-MPC11E | 634](#)

[MX Series MIC Overview | 26](#)

[MICs Supported by MX Series Routers | 27](#)

MPCs Supported by MX Series Routers

Table 4 on page 17 lists the MPCs and their first supported Junos OS release on MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 routers.

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers

Fixed Configuration MPCs

"MPC-3D-1 6XGE-SFPP" on page 140	MPC-3D-16XGE-SFP	10.0R2	15.1F7	12.3	12.3	-	-
"Multiservices MPC" on page 144	MS-MPC	13.2R4	15.1F7	15.1	15.1	-	-
"32x10GE MPC4E" on page 181	MPC4E-3D-32XGE-SFPP	12.3R2	15.1F7	12.3R2	12.3R2	-	-
"2x100GE + 8x10GE MPC4E" on page 184	MPC4E-3D-2CGE-8XGE	12.3R2	15.1F7	12.3R2	12.3R2	-	-
"6x40GE + 24x10GE MPC5E" on page 187	MPC5E-40G10G	13.3R2	15.1F7	13.3R2	13.3R2	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"6x40GE + 24x10GE MPC5EQ" on page 192	MPC5EQ-4 0G10G	13.3R2	15.1F7	13.3R2	13.3R2	-	-
"2x100GE + 4x10GE MPC5E" on page 195	MPC5E-100 G10G	13.3R3	15.1F7	13.3R3	13.3R3	-	-
"2x100GE + 4x10GE MPC5EQ" on page 198	MPC5EQ-1 00G10G	13.3R3	15.1F7	13.3R3	13.3R3	-	-
"MPC7E-MRATE" on page 204	MPC7E-MRATE	<ul style="list-style-type: none"> 15.1F4 with Junos Continuity 16.1R1 and later 	15.1F7	<ul style="list-style-type: none"> 15.1F4 with Junos Continuity 16.1R1 and later 	<ul style="list-style-type: none"> 15.1F4 with Junos Continuity 16.1R1 and later 	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MPC7E-10 G" on page 207	MPC7E-10G	<ul style="list-style-type: none"> 15.1F5 with Junos Continuity 16.1R1 and later 	15.1F7	<ul style="list-style-type: none"> 15.1F5 with Junos Continuity 16.1R1 and later 	<ul style="list-style-type: none"> 15.1F5 with Junos Continuity 16.1R1 and later 	-	-
"MPC10E-1 OC-MRATE" on page 215	MPC10E-10 C-MRATE	19.2R1	-	-	-	-	-
"MPC10E-1 5C-MRATE" on page 220	MPC10E-15 C-MRATE	19.1R1	-	-	-	-	-
MPCs							
"MPC1" on page 147	MX-MPC1-3D	10.2	15.1F7	12.3	12.3	-	-
"MPC1E" on page 149	MX-MPC1E-3D	11.2R4	15.1F7	12.3	12.3	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MPC1 Q" on page 151	MX-MPC1-3D-Q	10.2	15.1F7	12.3	12.3	-	-
"MPC1E Q" on page 153	MX-MPC1E-3D-Q	11.2R4	15.1F7	12.3	12.3	-	-
"MPC2" on page 155	MX-MPC2-3D	10.1	15.1F7	12.3	12.3	-	-
"MPC2E" on page 157	MX-MPC2E-3D	11.2R4	15.1F7	12.3	12.3	-	-
"MPC2 Q" on page 159	MX-MPC2-3D-Q	10.1	15.1F7	12.3	12.3	-	-
"MPC2E Q" on page 161	MX-MPC2E-3D-Q	11.2R4	15.1F7	12.3	12.3	-	-
"MPC2 EQ" on page 163	MX-MPC2-3D-EQ	10.1	15.1F7	12.3	12.3	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MPC2E EQ" on page 165	MX-MPC2E-3D-EQ	11.2R4	15.1F7	12.3	12.3	-	-
"MPC2E P" on page 167	MX-MPC2E-3D-P	12.2	15.1F7	12.3	12.3	-	-
"MPC2E NG" on page 169	MX-MPC2E-3D-NG	14.1R4, 14.2R3 and Junos Continuity 15.1	15.1F7	14.1R4, 14.2R3 and Junos Continuity 15.1	14.1R4, 14.2R3 and Junos Continuity 15.1	-	-
"MPC2E NG Q" on page 171	MX-MPC2E-3D-NG-Q	14.1R4, 14.2R3 and Junos Continuity 15.1	15.1F7	14.1R4, 14.2R3 and Junos Continuity 15.1	14.1R4, 14.2R3 and Junos Continuity 15.1	-	-
"MPC3E" on page 174	MX-MPC3E-3D	12.1	15.1F7	12.3	12.3	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MPC3E-3D-NG" on page 176	MX-MPC3E-3D-NG	14.1R4, 14.2R3 and Junos Continuity 15.1	15.1F7	14.1R4, 14.2R3 and Junos Continuity 15.1	14.1R4, 14.2R3 and Junos Continuity 15.1	-	-
"MPC3E-3D-NG-Q" on page 178	MX-MPC3E-3D-NG-Q	14.1R4, 14.2R3 and Junos Continuity 15.1	15.1F7	14.1R4, 14.2R3 and Junos Continuity 15.1	14.1R4, 14.2R3 and Junos Continuity 15.1	-	-
"MPC6E" on page 201	MX2K-MPC6E	-	15.1F7	13.3R2	13.3R2	-	-
"MPC8E" on page 210	MX2K-MPC8E	-	15.1F7	<ul style="list-style-type: none"> 15.1F5 with Junos Continuity 16.1R1 and later 	<ul style="list-style-type: none"> 15.1F5 with Junos Continuity 16.1R1 and later 	-	-

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MPC9E" on page 213	MX2K-MPC9E	-	15.1F7	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1 and later 	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1 and later 	-	-
<i>MX10003 MPC (Multi-Rate)</i>	MX10003-LC2103	-	-	-	-	17.3	

Table 4: MPCs Supported by MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 Routers (Continued)

MPC Name	MPC Model Number	First Junos OS Release on MX240, MX480, and MX960 Routers	First Junos OS Release on MX2008 Routers	First Junos OS Release on MX2010 Routers	First Junos OS Release on MX2020 Routers	First Junos OS Release on MX10003 Routers	First Junos OS Release on MX10008 Routers
"MX2K-MPC11E Modular Port Concentrator" on page 224	MX2K-MPC11E	-	-	<ul style="list-style-type: none"> 19.3R2 and later 19.3 releases 20.1R1 	<ul style="list-style-type: none"> 19.3R2 and later 19.3 releases 20.1R1 	-	-
				<p>NOTE: The MX2K-MPC11E MPC is not supported in any 19.4 releases.</p>	<p>NOTE: The MX2K-MPC11E MPC is not supported in any 19.4 releases.</p>		

RELATED DOCUMENTATION

- [MX Series MPC Overview | 15](#)

- [MX Series MPC Overview | 15](#)

- [MX Series MIC Overview | 26](#)

MICs Supported by MX Series Routers

MIC/MPC Compatibility

[Pathfinder: Hardware Supported by Junos Continuity Software](#)

MICs Supported on MX Series Routers

IN THIS CHAPTER

- [MX Series MIC Overview | 26](#)
- [MICs Supported by MX Series Routers | 27](#)
- [MIC/MPC Compatibility | 45](#)

MX Series MIC Overview

MICs provide the physical connections to various network media types. MICs allow different physical interfaces to be supported on a single line card. You can install MICs of different media types on the same router as long as the router supports those MICs.

MICs receive incoming packets from the network and transmit outgoing packets to the network. During this process, each MIC performs framing and high-speed signaling for its media type. MICs install into Modular Port Concentrators (MPCs) which provide packet forwarding services. Before transmitting outgoing data packets through the MIC interfaces, the Modular Port Concentrator (MPCs) encapsulate the packets received. Each MPC is equipped with up to four Junos Trio chipsets, which perform control functions tailored to the MPC's media type.

MICs and MPCs function similarly to PICs and FPCs. MICs are hot-removable and hot-insertable. You can install up to two MICs of different media types in the same MPC as long as the MPC supports those MICs. Depending on the MX router chassis, the MICs install vertically or horizontally into MPCs, or directly into the MX router chassis as follows:

- Vertically into MPCs— MX960, MX2008, MX2010, and MX2020 routers
- Horizontally into MPCs—MX10003, MX480, and MX240 routers
- Directly into the router chassis—MX5, MX10, MX40, MX80, and MX104 routers

NOTE: The MX80 router is available as a modular (MX80) or fixed (MX80-48T) chassis. Both chassis have a fixed Modular Interface Card (MIC) that has 3 10-Gigabit Ethernet ports. The fixed

MX80 router has an additional 48 10/100/1000Base-T RJ45 ports. The modular chassis has two dedicated slots for MICs.

RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MICs Supported by MX Series Routers | 27](#)

[MIC/MPC Compatibility | 45](#)

[MPCs Supported by MX Series Routers | 16](#)

MICs Supported by MX Series Routers

The following tables list the first supported Junos OS release for the MX Series.

- [Table 5 on page 27](#) lists the first supported Junos OS release for MICs on MX240, MX480, MX960, and MX2008 routers.
- [Table 6 on page 33](#) lists the first supported Junos OS release for MICs on MX2010 and MX2020 routers.
- [Table 7 on page 37](#) list the first supported Junos OS release for MICs on MX5, MX10, and MX40 routers.
- [Table 8 on page 41](#) lists the first supported Junos OS release for MICs on MX80 and MX104 routers.
- [Table 9 on page 45](#) lists the first supported Junos OS release for MICs on MX10003 router.

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
ATM				

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers *(Continued)*

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
"ATM MIC with SFP" on page 235	MIC-3D-8OC3-2 OC12-ATM	8	12.1	15.1F7
DS3/E3				
"DS3/E3 MIC" on page 240	MIC-3D-8DS3-E3, MIC-3D-8CHDS3-E3-B	8	11.4	15.1F7
Circuit Emulation				
"Channelized E1/T1 Circuit Emulation MIC" on page 319	MIC-3D-16CHE1-T1-CE	16	12.3	15.1F7
Gigabit Ethernet				
"Gigabit Ethernet MIC with SFP" on page 246	MIC-3D-20GE-SFP	20	10.1	15.1F7
"Gigabit Ethernet MIC with SFP (E)" on page 251	MIC-3D-20GE-SFP-E	20	13.3	15.1F7
"Gigabit Ethernet MIC with 256b-AES MACsec" on page 260	MIC-MACSEC-20GE	20	18.3	-

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers (*Continued*)

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
10-Gigabit Ethernet				
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-2XGE-XFP	2	10.2	15.1F7
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-4XGE-XFP	4	10.1	15.1F7
"10-Gigabit Ethernet MIC with SFP+ (10 Ports)" on page 268	MIC3-3D-10XGE-SFPP	10	12.3	15.1F7
"10-Gigabit Ethernet MIC with SFP+ (24 Ports)" on page 271	MIC6-10G	24	-	15.1F7
"10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports)" on page 273	MIC6-10G-OTN	24	-	15.1F7
40-Gigabit Ethernet				

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers *(Continued)*

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
"40-Gigabit Ethernet MIC with QSFP+" on page 276	MIC3-3D-2X40G E-QSFPP	2	12.2	15.1F7
100-Gigabit Ethernet				
"100-Gigabit Ethernet MIC with CFP" on page 279	MIC3-3D-1X100 GE-CFP	1	12.1	15.1F7
"100-Gigabit Ethernet MIC with CXP" on page 281	MIC3-3D-1X100 GE-CXP	1	12.2	15.1F7
"100-Gigabit Ethernet MIC with CXP (4 Ports)" on page 283	MIC6-100G-CXP	4	-	15.1F7
"100-Gigabit Ethernet MIC with CFP2" on page 285	MIC6-100G-CFP2	2	-	15.1F7
100-Gigabit DWDM OTN				

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers *(Continued)*

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
"100-Gigabit DWDM OTN MIC with CFP2-ACO" on page 289	MIC3-100G-DWDM	1	15.1F5 15.1F6 17.1R1	15.1F7
Multi-Rate				
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-4OC3OC12-1OC48	4	11.2	15.1F7
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-8OC3OC12-4OC48	8	11.2	15.1F7
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-4CHOC3-2CHOC12	4	11.4	15.1F7
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-8CHOC3-4CHOC12	8	11.4	15.1F7

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309	MIC-3D-4COC3-1COC12-CE	4	12.2	15.1F7
"MIC MRATE" on page 334 (12-Port Multi-Rate MIC with QSFP+)	MIC-MRATE	12	-	15.1F7
"Multi-Rate Ethernet MIC" on page 348 (12-Port Multi-Rate MACsec MIC with QSFP+)	MIC-MACSEC-MRATE	12		17.4
Tri-Rate				
"Tri-Rate MIC" on page 329	MIC-3D-40GE-TX	40	10.2	15.1F7
Services				
"Multiservices MIC" on page 338	MS-MIC-16G	0	13.2	15.1F7
SONET/SDH				

Table 5: MICs Supported by MX240, MX480, MX960 and MX2008 Routers (*Continued*)

MIC Name	MIC Model Number	Ports	MX240, MX480, and MX960 Routers	MX2008 Routers
"SONET/SDH OC192/STM64 MIC with XFP" on page 360	MIC-3D-1OC192-XFP	1	12.2	15.1F7

Table 6: MICs Supported by MX2010 and MX2020 Routers

MIC Name	MIC Model Number	Ports	MX2010 Routers	MX2020 Routers
ATM				
"ATM MIC with SFP" on page 235	MIC-3D-8OC3-2OC12-ATM	8	12.3	12.3
DS3/E3				
"DS3/E3 MIC" on page 240	MIC-3D-8DS3-E3, MIC-3D-8CHDS3-E3-B	8	12.3	12.3
Circuit Emulation				
"Channelized E1/T1 Circuit Emulation MIC" on page 319	MIC-3D-16CHE1-T1-CE	16	-	-
Gigabit Ethernet				

Table 6: MICs Supported by MX2010 and MX2020 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX2010 Routers	MX2020 Routers
"Gigabit Ethernet MIC with SFP" on page 246	MIC-3D-20GE-SFP	20	12.3	12.3
"Gigabit Ethernet MIC with SFP (E)" on page 251	MIC-3D-20GE-SFP-E	20	13.3	13.3
10-Gigabit Ethernet				
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-2XGE-XFP	2	12.3	12.3
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-4XGE-XFP	4	12.3	12.3
"10-Gigabit Ethernet MIC with SFP+ (10 Ports)" on page 268	MIC3-3D-10XGE-SFP+	10	12.3	12.3
"10-Gigabit Ethernet MIC with SFP+ (24 Ports)" on page 271	MIC6-10G	24	13.3R2	13.3R2
"10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports)" on page 273	MIC6-10G-OTN	24	13.3R3	13.3R3
40-Gigabit Ethernet				

Table 6: MICs Supported by MX2010 and MX2020 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX2010 Routers	MX2020 Routers
"40-Gigabit Ethernet MIC with QSFP+" on page 276	MIC3-3D-2X40 GE-QSFPP	2	12.3	12.3
100-Gigabit Ethernet				
"100-Gigabit Ethernet MIC with CFP" on page 279	MIC3-3D-1X10 OGE-CFP	1	12.3	12.3
"100-Gigabit Ethernet MIC with CXP" on page 281	MIC3-3D-1X10 OGE-CXP	1	12.3	12.3
"100-Gigabit Ethernet MIC with CXP (4 Ports)" on page 283	MIC6-100G- CXP	4	13.3R2	13.3R2
"100-Gigabit Ethernet MIC with CFP2" on page 285	MIC6-100G- CFP2	2	13.3R3	13.3R3
100-Gigabit DWDM OTN				
"100-Gigabit DWDM OTN MIC with CFP2-ACO" on page 289	MIC3-100G- DWDM	1	15.1F5 15.1F6 17.1R1	15.1F5 15.1F6 17.1R1
Multi-Rate				

Table 6: MICs Supported by MX2010 and MX2020 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX2010 Routers	MX2020 Routers
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-4OC30 C12-1OC48	4	12.3	12.3
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-8OC30 C12-4OC48	8	12.3	12.3
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-4CHO C3-2CHOC12	4	12.3	12.3
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-8CHO C3-4CHOC12	8	12.3	12.3
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309	MIC-3D-4COC3 -1COC12-CE	4	12.3	12.3
"MIC MRATE" on page 334 (12-Port Multi-Rate MIC with QSFP+)	MIC-MRATE	12	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1 and later 	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1 and later

Table 6: MICs Supported by MX2010 and MX2020 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX2010 Routers	MX2020 Routers
"Multi-Rate Ethernet MIC" on page 348 (12-Port Multi-Rate MACsec MIC with QSFP+)	MIC-MACSEC-MRATE	12	17.4	17.4
Tri-Rate				
"Tri-Rate MIC" on page 329	MIC-3D-40GE-TX	40	12.3	12.3
Services				
"Multiservices MIC" on page 338	MS-MIC-16G	0	13.2	13.2
SONET/SDH				
"SONET/SDH OC192/STM64 MIC with XFP" on page 360	MIC-3D-1OC192-XFP	1	12.3	12.3

Table 7: MICs Supported by MX5, MX10, and MX40 Routers

MIC Name	MIC Model Number	Ports	MX5	MX10	MX40
ATM					
"ATM MIC with SFP" on page 235	MIC-3D-8OC3-2OC12-ATM	8	12.1	12.1	12.1

Table 7: MICs Supported by MX5, MX10, and MX40 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX5	MX10	MX40
DS3/E3					
"DS3/E3 MIC" on page 240	MIC-3D-8DS3-E3, MIC-3D-8CH-DS3-E3-B	8	11.4	11.4	11.4
Circuit Emulation					
"Channelized E1/T1 Circuit Emulation MIC" on page 319	MIC-3D-16CH-E1-T1-CE	16	13.2R2	13.2R2	13.2R2
"Channelized E1/T1 Circuit Emulation MIC (H)" on page 323	MIC-3D-16CH-E1-T1-CE-H	16	-	-	-
Gigabit Ethernet					
"Gigabit Ethernet MIC with SFP" on page 246	MIC-3D-20GE-SFP	20	11.2R4	11.2R4	11.2R4
"Gigabit Ethernet MIC with SFP (E)" on page 251	MIC-3D-20GE-SFP-E	20	13.2R2	13.2R2	13.2R2

Table 7: MICs Supported by MX5, MX10, and MX40 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX5	MX10	MX40
"Gigabit Ethernet MIC with SFP (EH)" on page 257	MIC-3D-20GE-SFP-EH	20	-	-	-
10-Gigabit Ethernet					
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-2XGE-XFP	2	11.2R4	11.2R4	11.2R4
Multi-Rate					
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-4OC3-OC12-1OC48	4	11.2R4	11.2R4	11.2R4
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-8OC3-OC12-4OC48	8	11.2R4	11.2R4	11.2R4

Table 7: MICs Supported by MX5, MX10, and MX40 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX5	MX10	MX40
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-4CH OC3-2CHOC1 2	4	11.4	11.4	11.4
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-8CH OC3-4CHOC1 2	8	11.4	11.4	11.4
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309	MIC-3D-4CO C3-1COC12- CE	4	12.2	12.2	12.2
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H)" on page 314	MIC-4COC3-1 COC12-CE-H	-	-	-	-
Tri-Rate					

Table 7: MICs Supported by MX5, MX10, and MX40 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX5	MX10	MX40
"Tri-Rate MIC" on page 329	MIC-3D-40GE-TX	40	-	11.2R4	11.2R4
Services					
"Multiservices MIC" on page 338	MS-MIC-16G	0	13.2 Rear slot only.	13.2 Rear slot only.	13.2 Rear slot only.
"SONET/SDH OC192/STM64 MIC with XFP" on page 360	MIC-3D-1OC192-XFP	1	12.2	12.2	12.2

Table 8: MICs Supported by MX80 and MX104 Routers

MIC Name	MIC Model Number	Ports	MX80	MX104
ATM				
"ATM MIC with SFP" on page 235	MIC-3D-8OC3-2-OC12-ATM	8	12.1	13.3
DS3/E3				
"DS3/E3 MIC" on page 240	MIC-3D-8DS3-E3, MIC-3D-8CHDS3-E3-B	8	11.4	13.3

Table 8: MICs Supported by MX80 and MX104 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX80	MX104
Circuit Emulation				
"Channelized E1/T1 Circuit Emulation MIC" on page 319	MIC-3D-16CHE1-T1-CE	16	13.2R2	13.2R2
"Channelized E1/T1 Circuit Emulation MIC (H)" on page 323	MIC-3D-16CHE1-T1-CE-H	16	-	13.2R2
Gigabit Ethernet				
"Gigabit Ethernet MIC with SFP" on page 246	MIC-3D-20GE-SFP	20	10.2	13.2R2
"Gigabit Ethernet MIC with SFP (E)" on page 251	MIC-3D-20GE-SFP-E	20	13.2R2	13.2R2
"Gigabit Ethernet MIC with SFP (EH)" on page 257	MIC-3D-20GE-SFP-EH	20	-	13.2R2
"Gigabit Ethernet MIC with 256b-AES MACsec" on page 260	MIC-MACSEC-20GE	20	18.3	18.3

Table 8: MICs Supported by MX80 and MX104 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX80	MX104
"10-Gigabit Ethernet MICs with XFP" on page 264	MIC-3D-2XGE-XFP	2	10.2	13.2R2
Multi-Rate				
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-4OC3OC12-1OC48	4	11.2	13.3
"SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	MIC-3D-8OC3OC12-4OC48	8	11.2	13.3
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-4CHOC3-2CHOC12	4	11.4	13.3
"Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	MIC-3D-8CHOC3-4CHOC12	8	11.4	13.3

Table 8: MICs Supported by MX80 and MX104 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX80	MX104
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309	MIC-3D-4COC3-1COC12-CE	4	12.2	13.2R2
"Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H)" on page 314	MIC-4COC3-1COC12-CE-H	-	-	13.2R2
Tri-Rate				
"Tri-Rate MIC" on page 329	MIC-3D-40GE-TX	40	10.2	13.2R2
Services				
"Multiservices MIC" on page 338	MS-MIC-16G	0	13.2	13.3R2
			Rear slot only. Supported on the modular MX80 and fixed MX80-48T	NOTE: Starting From Junos OS 13.3R3, 14.1R2, and 14.2R1, MX104 supports only two Multiservices MICs.
SONET/SDH				

Table 8: MICs Supported by MX80 and MX104 Routers (Continued)

MIC Name	MIC Model Number	Ports	MX80	MX104
"SONET/SDH OC192/STM64 MIC with XFP" on page 360	MIC-3D-1OC192-XFP	1	12.2	13.3

Table 9: MICs Supported by MX10003 Router

MIC Name	MIC Model Number	Ports	MX10003
Multi-Rate			
"Multi-Rate Ethernet MIC" on page 348 (12-Port Multi-Rate MIC with QSFP+)	JNP-MIC1	12	17.3
"Multi-Rate Ethernet MIC" on page 348 (12-Port Multi-Rate MACsec MIC with QSFP+)	JNP-MIC1-MACSEC	12	17.3R2

RELATED DOCUMENTATION

[MX Series MIC Overview | 26](#)

[MIC/MPC Compatibility | 45](#)

MIC/MPC Compatibility

The following tables provide a compatibility matrix for the MICs currently supported by MPC1, MPC2, MPC3, MPC6, MPC8, and MPC9 on MX240, MX480, MX960, MX2008, MX2010, MX2020, and MX10003 routers. Each table lists the first Junos OS release in which the MPC supports the MIC. For

example, Junos OS Release 10.2 is the first release in which the MX-MPC1-3D supports the Gigabit Ethernet MIC with SFP. An en dash indicates that the MIC is not supported.

Table 10: MIC/MPC1 Compatibility

MIC Name	MPC1	MPC1E	MPC1 Q	MPC1E Q
MIC-3D-8OC3-2 OC12-ATM ("ATM MIC with SFP" on page 235)	—	—	12.1	12.1R4
MIC-3D-20GE- SFP ("Gigabit Ethernet MIC with SFP" on page 246)	10.2	11.2R4	10.2	11.2R4
MIC-3D-20GE- SFP-E ("Gigabit Ethernet MIC with SFP (E)" on page 251)	13.2R2	13.2R2	13.2R2	13.2R2
MIC-3D-2XGE- XFP ("10-Gigabit Ethernet MICs with XFP" on page 264)	10.2	11.2R4	10.2	11.2R4

Table 10: MIC/MPC1 Compatibility (Continued)

MIC Name	MPC1	MPC1E	MPC1 Q	MPC1E Q
MIC-3D-4XGE-XFP ("10-Gigabit Ethernet MICs with XFP" on page 264)	—	—	—	—
MIC-3D-40GE-TX ("Tri-Rate MIC" on page 329)	10.2	11.2R4	10.2	11.2R4
MIC-3D-4OC3O C12-1OC48, MIC-3D-8OC3O C12-4OC48 ("SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341)	11.2	11.2R4	11.2	11.2R4
MIC-3D-4COC3-1COC12-CE ("Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309)	—	—	12.2	12.2

Table 10: MIC/MPC1 Compatibility (Continued)

MIC Name	MPC1	MPC1E	MPC1 Q	MPC1E Q
MIC-3D-1OC192 -XFP ("SONET/SDH OC192/STM64 MIC with XFP" on page 360)	12.2	12.2	12.2	12.2
MIC-3D-4CHOC 3-2CHOC12, MIC-3D-8CHOC 3-4CHOC12 MIC-4COC3-2CO C12-G, MIC-8COC3-4CO C12-G ("Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300)	—	—	11.4	11.4
MIC-3D-16CHE1 -T1-CE ("Channelized E1/T1 Circuit Emulation MIC" on page 319)	13.2 NOTE: Support for Non- Channelized MIC only.	13.2 NOTE: Support for Non- Channelized MIC only.	12.3	12.3

Table 10: MIC/MPC1 Compatibility (Continued)

MIC Name	MPC1	MPC1E	MPC1 Q	MPC1E Q
MIC-3D-8DS3-E3, MIC-3D-8CHDS3-E3-B ("DS3/E3 MIC" on page 240) NOTE: You cannot run Channelized DS3 (MIC-3D-8CHDS3-E3) on non-Q MPCs. Channelized DS3 is supported only on Q and EQ-based MPCs.	11.4	11.4	11.4	11.4
MIC-MACSEC-20GE "Gigabit Ethernet MIC with 256b-AES MACsec" on page 260	18.3R1	18.3R1	18.3R1	18.3R1
MS-MIC-16G ("Multiservices MIC" on page 338)	13.2	13.2	13.2	13.2

Table 11: MIC/MPC2 Compatibility

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MIC-3D-80 C3-2OC12- ATM ("ATM MIC with SFP" on page 235)	—	—	14.1R4 , 14.2R3 with Junos Contin uity 15.1	12.1	12.1R4	12.1	12.1R4	—	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-20 GE-SFP ("Gigabit Ethernet MIC with SFP" on page 246)	10.1	11.2R4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	10.1	11.2R4	10.1	11.2R4	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-20 GE-SFP-E ("Gigabit Ethernet MIC with SFP (E)" on page 251)	13.2R2	13.2R2	14.1R4 , 14.2R3 with Junos Contin uity 15.1	13.2R2	13.2R2	13.2R2	13.2R2	13.2R2	14.1R4 , 14.2R3 with Junos Contin uity 15.1

Table 11: MIC/MPC2 Compatibility (Continued)

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MIC-3D-2X GE-XFP ("10-Gigabit Ethernet MIC with XFP" on page 264)	10.2	11.2R4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	10.2	11.2R4	10.2	11.2R4	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-4X GE-XFP ("10-Gigabit Ethernet MICs with XFP" on page 264)	10.1	11.2R4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	10.1	11.2R4	10.1	11.2R4	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-40 GE-TX ("Tri-Rate MIC" on page 329)	10.2	11.2R4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	10.2	11.2R4	10.2	11.2R4	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1

Table 11: MIC/MPC2 Compatibility (Continued)

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MIC-3D-4O C3OC12-1 OC48, MIC-3D-8O C3OC12-4 OC48 ("SONET/S DH OC3/ STM1 (Multi-Rate) MICs with SFP" on page 341)	11.4	11.4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	11.4	11.4	11.4	11.4	-	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-4C OC3-1COC 12-CE ("Channelize d OC3/ STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309)	—	—	—	12.2	12.2	12.2	12.2	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1

Table 11: MIC/MPC2 Compatibility (Continued)

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MIC-3D-10 C192-XFP ("SONET/ SDH OC192/ STM64 MIC with XFP" on page 360)	12.2	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1	12.2	12.2	12.2	12.2	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-4C HOC3-2CH OC12, MIC-3D-8C HOC3-4CH OC12 MIC-4COC 3-2COC12- G, MIC-8COC 3-4COC12- G ("Channelize d SONET/SD H OC3/ STM1 (Multi-Rate) MICs with SFP" on page 300)	—	—	15.1 with flexible queuin g option	11.4	11.4	11.4	11.4	—	15.1 14.1R4 , 14.2R3 with Junos Contin uity

Table 11: MIC/MPC2 Compatibility (Continued)

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MIC-3D-16 CHE1-T1- CE ("Channelize d E1/T1 Circuit Emulation MIC" on page 319)	13.2		15.1 with flexible queuin g option	12.3	12.3	12.3	12.3	—	14.1R4 , 14.2R3 with Junos Contin uity 15.1
MIC-3D-8D S3-E3, MIC-3D-8C HDS3-E3-B ("DS3/E3 MIC" on page 240) NOTE: You cannot run Channelized DS3 (MIC-3D-8C HDS3-E3) on non-Q MPCs. Channelized DS3 is supported only on Q and EQ- based MPCs.	11.4	11.4	14.1R4 , 14.2R3 with Junos Contin uity 15.1	11.4	11.4	11.4	11.4	12.2	14.1R4 , 14.2R3 with Junos Contin uity 15.1

Table 11: MIC/MPC2 Compatibility (Continued)

MIC Name	MPC2	MPC2 E	MPC2 E NG	MPC2 Q	MPC2 E Q	MPC2 EQ	MPC2 E EQ	MPC2 E P	MPC2 E NG Q
MS-MIC-16G ("Multiservices MIC" on page 338) NOTE: Only one MS-MIC-16G can be installed into any MPC.	13.2	13.2	14.1R4 , 14.2R3 with Junos Continuity 15.1	13.2	13.2	13.2	13.2	13.2	14.1R4 , 14.2R3 with Junos Continuity 15.1
MIC-MACSEC-2 OGE "Gigabit Ethernet MIC with 256b-AES MACsec" on page 260	18.3R1	18.3R1	18.3R1	18.3R1	18.3R1	18.3R1	18.3R1	18.3R1	18.3R1

Table 12: MIC/MPC3 Compatibility

MIC Name	MPC3E	MPC3E NG	MPC3E NG Q
MIC-3D-8OC3-2OC12-ATM ("ATM MIC with SFP" on page 235)	—	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1

Table 12: MIC/MPC3 Compatibility (Continued)

MIC Name	MPC3E	MPC3E NG	MPC3E NG Q
MIC-3D-20GE-SFP ("Gigabit Ethernet MIC with SFP" on page 246)	12.1	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-20GE-SFP-E ("Gigabit Ethernet MIC with SFP (E)" on page 251)	13.2R2	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC3-3D-1X100GE-CFP ("100-Gigabit Ethernet MIC with CFP" on page 279)	12.1	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-2XGE-XFP ("10-Gigabit Ethernet MICs with XFP" on page 264)	12.2	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-4XGE-XFP ("10-Gigabit Ethernet MICs with XFP" on page 264)	—	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC3-3D-10XGE-SFPP ("10-Gigabit Ethernet MIC with SFP+ (10 Ports)" on page 268)	12.3	14.1R4, 14.2 R3 and Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1

Table 12: MIC/MPC3 Compatibility (Continued)

MIC Name	MPC3E	MPC3E NG	MPC3E NG Q
MIC3-3D-2X40GE-QSFPP ("40-Gigabit Ethernet MIC with QSFP+" on page 276)	12.2	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC3-3D-1X100GE-CXP ("100-Gigabit Ethernet MIC with CXP" on page 281)	12.2	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC3-100G-DWDM ("100-Gigabit DWDM OTN MIC with CFP2-ACO" on page 289)	15.1F5 15.1F6 17.1R1	15.1F5 15.1F6 17.1R1	15.1F5 15.1F6 17.1R1
MIC-3D-4OC3OC12-1OC48 MIC-3D-8OC3OC12-4OC48 ("SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341)	13.3	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-1OC192-XFP ("SONET/SDH OC192/STM64 MIC with XFP" on page 360)	13.3	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-4COC3-1COC12-CE ("Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP" on page 309)	—	—	14.1R4, 14.2R3 with Junos Continuity 15.1

Table 12: MIC/MPC3 Compatibility (Continued)

MIC Name	MPC3E	MPC3E NG	MPC3E NG Q
MIC-3D-16CHE1-T1-CE ("Channelized E1/T1 Circuit Emulation MIC" on page 319)	—	15.1 with flexible queuing option	15.1
MS-MIC-16G ("Multiservices MIC" on page 338) NOTE: On MPC3E, the installation of the Multiservices MIC (MS-MIC-16G) with MIC3-3D-2X40GE-QSFPP, MIC3-3D-10XGE-SFPP, or MIC3-3D-1X100GE-CFP does not meet the NEBS criteria. NOTE: Only one MS-MIC-16G can be installed into any MPC.	13.2R2	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-40GE-TX "Tri-Rate MIC" on page 329	—	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-4OC3OC12-1OC48, MIC-3D-8OC3OC12-4OC48 "SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 341	12.1	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-3D-4CHOC3-2CHOC12, MIC-3D-8CHOC3-4CHOC12 MIC-4COC3-2COC12-G, MIC-8COC3-4COC12-G "Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP" on page 300	—	15.1 with flexible queuing option	14.1R4, 14.2R3 with Junos Continuity 15.1

Table 12: MIC/MPC3 Compatibility (Continued)

MIC Name	MPC3E	MPC3E NG	MPC3E NG Q
MIC-3D-8DS3-E3, MIC-3D-8CHDS3-E3-B "DS3/E3 MIC" on page 240 NOTE: You cannot run Channelized DS3 (MIC-3D-8CHDS3-E3) on non-Q MPCs. Channelized DS3 is supported only on Q and EQ-based MPCs.	12.1	14.1R4, 14.2R3 with Junos Continuity 15.1	14.1R4, 14.2R3 with Junos Continuity 15.1
MIC-MACSEC-20GE "Gigabit Ethernet MIC with 256b-AES MACsec" on page 260	18.3R1	18.3R1	18.3R1

Table 13: MIC/MPC6 Compatibility

MIC Name	MPC6E
MIC6-10G "10-Gigabit Ethernet MIC with SFP+ (24 Ports)" on page 271	13.3R2
MIC6-10G-OTN "10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports)" on page 273	13.3R3
MIC6-100G-CXP "100-Gigabit Ethernet MIC with CXP (4 Ports)" on page 283	13.3R2
MIC6-100G-CFP2 "100-Gigabit Ethernet MIC with CFP2" on page 285	13.3R3

Table 14: MIC/MPC8 Compatibility

MIC Name	MPC8E
MIC-MRATE <i>MIC MRATE</i>	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1
MIC-MACSEC-MRATE "Multi-Rate Ethernet MIC" on page 348	17.4

Table 15: MIC/MPC9 Compatibility

MIC Name	MPC9E
MIC-MRATE <i>MIC MRATE</i>	<ul style="list-style-type: none"> • 15.1F5 with Junos Continuity • 16.1R1
MIC-MACSEC-MRATE "Multi-Rate Ethernet MIC" on page 348	17.4

Table 16: MIC/MPC10003 Compatibility

MIC Name	MPC10003
JNP-MIC1 "Multi-Rate Ethernet MIC" on page 348	17.3
JNP-MIC1-MACSEC "Multi-Rate Ethernet MIC" on page 348	17.3R2

FPCs and PICs Supported on MX Series Routers

IN THIS CHAPTER

- [MX Series FPC and PIC Overview | 61](#)
- [High Availability Features | 62](#)
- [FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)
- [PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

MX Series FPC and PIC Overview

Flexible PIC Concentrators (FPCs) and Physical Interface Cards (PICs) function similarly to MICs and MPCs. PICs provide physical interfaces for the router and install into FPCs which provide packet forwarding services. Each FPC supports up to two Physical Interface Cards (PICs). You can install PICs of different media types on the same router as long as the router supports those PICs.

PICs receive incoming packets from the network and transmit outgoing packets to the network. During this process, each PIC performs framing and high-speed signaling for its media type. Before transmitting outgoing data packets, the PICs encapsulate the packets received. Each PIC is equipped with a media-specific ASIC that performs control functions tailored to the PIC's media type.

An FPC occupies two Dense Port Concentrator (DPC) slots on an MX Series router. FPCs install vertically in the MX960 router chassis, and horizontally in the MX480 and MX240 router chassis. The maximum number of supported FPCs varies per router:

- MX960 router—6 FPCs
- MX480 router—3 FPCs
- MX240 router—1 FPC

MX240, MX480, and MX960 routers support 2 PICs per FPC. The maximum number of supported PICs varies per router:

- MX960 router—12 PICs
- MX480 router—6 PICs

- MX240 router—2 PICs

Blank PICs resemble other PICs but do not provide any physical connection or activity. When a slot is not occupied by a PIC, you must insert a blank PIC to fill the empty slot and ensure proper cooling of the system.

RELATED DOCUMENTATION

[High Availability Features | 62](#)

[FPCs Supported by MX240, MX480, and MX960 Routers](#)

[PICs Supported by MX240, MX480, and MX960 Routers](#)

High Availability Features

High availability features include Routing Engine redundancy, graceful Routing Engine switchover (GRES), nonstop bridging, nonstop active routing, graceful restart for routing protocols, Virtual Router Redundancy Protocol (VRRP), and unified in-service software upgrade (ISSU). Some high availability features are not supported by all platforms and all PICs. For more information, see the *Unified ISSU System Requirements* in the [Junos OS High Availability User Guide](#).

RELATED DOCUMENTATION

[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

FPCs Supported by MX240, MX480, and MX960 Routers

An FPC occupies two slots when installed in an MX240, MX480, or MX960 router. The maximum number of supported FPCs varies per router:

- MX960 router—6 FPCs
- MX480 router—3 FPCs
- MX240 router—1 FPC

Table 17 on page 63 lists FPCs supported by MX240, MX480, and MX960 routers.

Table 17: FPCs Supported by MX240, MX480, and MX960 Routers

FPC Type	FPC Name	FPC Model Number	Maximum Number of PICs Supported	Maximum Throughput per FPC (Full-duplex)	First Junos OS Release
3	FPC3	MX-FPC3	2	20 Gbps	9.4
2	FPC2	MX-FPC2	2	10 Gbps	9.5

RELATED DOCUMENTATION

[MX Series FPC and PIC Overview | 61](#)

PICs Supported by MX240, MX480, and MX960 Routers

[High Availability Features | 62](#)

PICs Supported by MX240, MX480, and MX960 Routers

Table 18 on page 63 lists the PICs supported by MX240, MX480, and MX960 routers.

Table 18: PICs Supported by MX240, MX480, and MX960 Routers

PIC Name	PIC Model Number	Ports	Type	First Junos OS Release
Channelized IQ PICs				
"Channelized OC12/STM4 Enhanced IQ (IQE) PIC with SFP" on page 366	PB-4CHOC12-STM4-IQE-SFP	4	2	9.5

Table 18: PICs Supported by MX240, MX480, and MX960 Routers (Continued)

PIC Name	PIC Model Number	Ports	Type	First Junos OS Release
"Channelized OC48/STM16 Enhanced IQ (IQE) PIC with SFP" on page 367	PB-1CHOC48-STM16-IQE	1	2	9.5
SONET/SDH PICs				
"SONET/SDH OC3/STM1 (Multi-Rate) PIC with SFP" on page 375	PB-4OC3-1OC12-SON2-SFP	4	2	9.5
"SONET/SDH OC12/STM4 (Multi-Rate) PIC with SFP" on page 380	PB-4OC3-4OC12-SON-SFP	4	2	9.5
"SONET/SDH OC48/STM16 Enhanced IQ (IQE) PIC with SFP" on page 384	PC-4OC48-STM16-IQE-SFP	4	3	10.4R2
"SONET/SDH OC48/STM16 (Multi-Rate) PIC with SFP" on page 390	PB-1OC48-SON-B-SFP	1	2	9.5
"SONET/SDH OC48/STM16 PIC with SFP" on page 394	PC-4OC48-SON-SFP	4	3	9.4
"SONET/SDH OC192c/STM64 PIC" on page 399	PC-1OC192-SON-VSR	1	3	9.4
"SONET/SDH OC192c/STM64 PIC with XFP" on page 404	PC-1OC192-SON-XFP	1	3	9.4

RELATED DOCUMENTATION

[MX Series FPC and PIC Overview | 61](#)

FPCs Supported by MX240, MX480, and MX960 Routers

[High Availability Features | 62](#)

Network Interface Specifications

IN THIS CHAPTER

- Determining Transceiver Support and Specifications | 66
- Cable and Connector Specifications for MX and PTX Series Devices | 67

Determining Transceiver Support and Specifications

You can find information about the pluggable transceivers supported on your Juniper Networks device by using the Hardware Compatibility Tool. In addition to transceiver and connector type, the optical and cable characteristics—where applicable—are documented for each transceiver. The Hardware Compatibility Tool allows you to search by product, displaying all the transceivers supported on that device, or category, displaying all the transceivers by interface speed or type. The Hardware Compatibility Tool is located at <https://apps.juniper.net/hct/>.

Some transceivers support additional monitoring using the operational mode CLI command `show interfaces diagnostics optics`. Use the Hardware Compatibility Tool to determine if your transceiver supports monitoring. See the Junos OS documentation for your device for a description of the monitoring fields.



CAUTION: If you face a problem running a Juniper Networks device that uses a third-party optic or cable, the Juniper Networks Technical Assistance Center (JTAC) can help you diagnose the source of the problem. Your JTAC engineer might recommend that you check the third-party optic or cable and potentially replace it with an equivalent Juniper Networks optic or cable that is qualified for the device.

RELATED DOCUMENTATION

[show interfaces diagnostics optics \(Gigabit Ethernet, 10-Gigabit Ethernet, 40-Gigabit Ethernet, 100-Gigabit Ethernet, and Virtual Chassis Port\)](#)

[show interfaces diagnostics optics \(SONET\)](#)

[show interfaces diagnostics optics](#)

[show interfaces diagnostics optics](#)

[show interfaces diagnostics optics](#)

Cable and Connector Specifications for MX and PTX Series Devices

IN THIS SECTION

- [12-Fiber MPO Connectors | 67](#)
- [24-Fiber MPO Connectors | 73](#)
- [LC Duplex Connectors | 74](#)

The transceivers that are supported on MX Series and PTX Series devices use fiber-optic cables and connectors. The type of connector and the type of fiber depends on the transceiver type.

You can determine the type of cable and connector required for your specific transceiver by using the [Hardware Compatibility Tool](#).



CAUTION: To maintain agency approvals, use only a properly constructed, shielded cable.

NOTE: The terms multifiber push-on (MPO) and multifiber termination push-on (MTP) describe the same connector type. The rest of this topic uses MPO to mean MPO or MTP.

12-Fiber MPO Connectors

There are two types of cables used with 12-fiber MPO connectors on Juniper Networks devices—patch cables with MPO connectors on both ends, and breakout cables with an MPO connector on one end and four LC duplex connectors on the opposite end. Depending on the application, the cables might use single-mode fiber (SMF) or multimode fiber (MMF). Juniper Networks sells cables that meet the supported transceiver requirements, but it is not required to purchase cables from Juniper Networks.

Ensure that you order cables with the correct polarity. Vendors refer to these crossover cables as *key up to key up*, *latch up to latch up*, *Type B*, or *Method B*. If you are using patch panels between two transceivers, ensure that the proper polarity is maintained through the cable plant.

Also, ensure that the fiber end in the connector is finished correctly. Physical contact (PC) refers to fiber that has been polished flat. Angled physical contact (APC) refers to fiber that has been polished at an angle. Ultra physical contact (UPC) refers to fiber that has been polished flat, to a finer finish. The required fiber end is listed with the connector type in the [Hardware Compatibility Tool](#).

12-Fiber Ribbon Patch Cables with MPO Connectors

You can use 12-fiber ribbon patch cables with socket MPO connectors to connect two transceivers of the same type—for example, 40GBASE-SR4-to-40GBASESR4 or 100GBASE-SR4-to-100GBASE-SR4. You can also connect 4x10GBASE-LR or 4x10GBASE-SR transceivers by using patch cables—for example, 4x10GBASE-LR-to-4x10GBASE-LR or 4x10GBASE-SR-to-4x10GBASE-SR—instead of breaking the signal out into four separate signals.

[Table 19 on page 68](#) describes the signals on each fiber. [Table 20 on page 69](#) shows the pin-to-pin connections for proper polarity.

Table 19: Cable Signals for 12-Fiber Ribbon Patch Cables

Fiber	Signal
1	Tx0 (Transmit)
2	Tx1 (Transmit)
3	Tx2 (Transmit)
4	Tx3 (Transmit)
5	Unused
6	Unused
7	Unused

Table 19: Cable Signals for 12-Fiber Ribbon Patch Cables (Continued)

Fiber	Signal
8	Unused
9	Rx3 (Receive)
10	Rx2 (Receive)
11	Rx1 (Receive)
12	Rx0 (Receive)

Table 20: Cable Pinouts for 12-Fiber Ribbon Patch Cables

MPO Pin	MPO Pin
1	12
2	11
3	10
4	9
5	8
6	7
7	6


Table 20: Cable Pinouts for 12-Fiber Ribbon Patch Cables (Continued)

MPO Pin	MPO Pin
8	5
9	4
10	3
11	2
12	1

12-Fiber Ribbon Breakout Cables with MPO-to-LC Duplex Connectors

You can use 12-ribbon breakout cables with MPO-to-LC duplex connectors to connect a QSFP+ transceiver to four separate SFP+ transceivers—for example, 4x10GBASE-LR-to-10GBASE-LR or 4x10GBASE-SR-to-10GBASE-SR SFP+ transceivers. The breakout cable is constructed out of a 12-fiber ribbon fiber-optic cable. The ribbon cable splits from a single cable with a socket MPO connector on one end, into four cable pairs with four LC duplex connectors on the opposite end.

[Figure 1 on page 70](#) shows an example of a typical 12-ribbon breakout cable with MPO-to-LC duplex connectors (depending on the manufacture, your cable may look different).

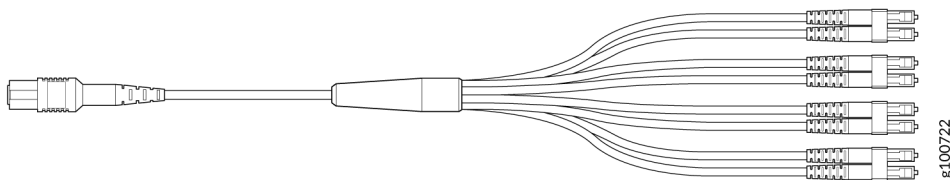Figure 1: 12-Ribbon Breakout Cable

[Table 21 on page 71](#) describes the way the fibers are connected between the MPO and LC duplex connectors. The cable signals are the same as those described in [Table 19 on page 68](#).

Table 21: Cable Pinouts for 12-Fiber Ribbon Breakout Cables

MPO Connector Pin	LC Duplex Connector Pin
1	Tx on LC Duplex 1
2	Tx on LC Duplex 2
3	Tx on LC Duplex 3
4	Tx on LC Duplex 4
5	Unused
6	Unused
7	Unused
8	Unused
9	Rx on LC Duplex 4
10	Rx on LC Duplex 3
11	Rx on LC Duplex 2
12	Rx on LC Duplex 1

12-Ribbon Patch and Breakout Cables Available from Juniper Networks

Juniper Networks sells 12-ribbon patch and breakout cables with MPO connectors that meet the requirements described above. It is not required to purchase cables from Juniper Networks. [Table 22 on page 72](#) describes the available cables.

Table 22: 12-Ribbon Patch and Breakout Cables Available from Juniper Networks

Cable Type	Connector Type	Fiber Type	Cable Length	Juniper Model Number
12-ribbon patch	Socket MPO/PC to socket MPO/PC, key up to key up	MMF (OM3)	1 m	MTP12-FF-M1M
			3 m	MTP12-FF-M3M
			5 m	MTP12-FF-M5M
			10 m	MTP12-FF-M10M
	Socket MPO/APC to socket MPO/APC, key up to key up	SMF	1 m	MTP12-FF-S1M
			3 m	MTP12-FF-S3M
			5 m	MTP12-FF-S5M
			10 m	MTP12-FF-S10M
12-ribbon breakout	Socket MPO/PC, key up, to four LC/UPC duplex	MMF (OM3)	1 m	MTP-4LC-M1M
			3 m	MTP-4LC-M3M
			5 m	MTP-4LC-M5M
			10 m	MTP-4LC-M10M
	Socket MPO/APC, key up, to four LC/UPC duplex	SMF	1 m	MTP-4LC-S1M

Table 22: 12-Ribbon Patch and Breakout Cables Available from Juniper Networks (Continued)


Cable Type	Connector Type	Fiber Type	Cable Length	Juniper Model Number
			3 m	MTP-4LC-S3M
			5 m	MTP-4LC-S5M
			10 m	MTP-4LC-S10M

24-Fiber MPO Connectors

You can use patch cables with 24-fiber MPO connectors to connect two supported transceivers of the same type—for example, 100GBASE-SR10-to-100GBASE-SR10.

Figure 2 on page 73 shows the 24-fiber MPO optical lane assignments.

Figure 2: 24-Fiber MPO Optical Lane Assignments

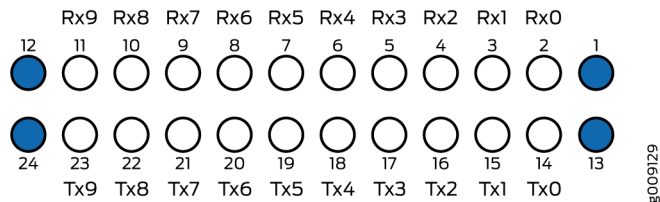

NOTE: Ensure that you order cables with the correct polarity. Vendors refer to these crossover cables as *key up to key up*, *latch up to latch up*, *Type B*, or *Method B*. If you are using patch panels between two transceivers, ensure that the proper polarity is maintained through the cable plant.

The MPO optical connector for the CFP2-100G-SR10-D3 is defined in *Section 5.6 of the CFP2 Hardware Specification* and *Section 88.10.3 of IEEE STD 802.3-2012*. These specifications include the following requirements:

- Recommended Option A in IEEE STD 802.3-2012.

- The transceiver receptacle is a plug. A patch cable with a socket connector is required to mate with the module.
- Ferrule finish shall be flat polished interface that is compliant with IEC 61754-7.
- Alignment key is key up.


The optical interface must meet the requirement FT-1435-CORE in *Generic Requirements for Multi-Fiber Optical Connectors*. The module must pass the wiggle test defined by IEC 62150-3.

LC Duplex Connectors

You can use patch cables with LC duplex connectors to connect two supported transceivers of the same type—for example, 40GBASE-LR4-to-40GBASE-LR4 or 100GBASE-LR4-to-100GBASE-LR4. The patch cable is one fiber pair with two LC duplex connectors at opposite ends. LC duplex connectors are also used with 12-fiber ribbon breakout cables, as described in "[12-Fiber Ribbon Breakout Cables with MPO-to-LC Duplex Connectors](#)" on page 70.

[Figure 3 on page 74](#) shows an LC duplex connector being installed in a transceiver.

Figure 3: LC Duplex Connector

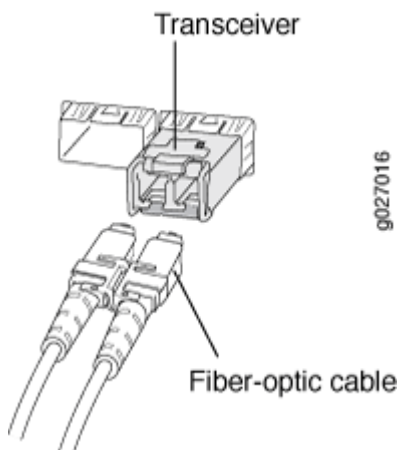

2

PART

DPC, SPC, MPC, MIC, and PIC Descriptions

[MX Series DPC Descriptions | 76](#)

[MX Series SPC Description | 132](#)

[MX Series MPC Descriptions | 139](#)

[MX Series MIC Descriptions | 234](#)


[MX Series PIC Descriptions | 365](#)

MX Series DPC Descriptions

IN THIS CHAPTER

- Gigabit Ethernet DPC with SFP | 77
- Gigabit Ethernet Enhanced DPC with SFP | 80
- Gigabit Ethernet Enhanced Ethernet Services DPC with SFP | 83
- Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with SFP | 86
- Gigabit Ethernet Enhanced Queuing IP Services DPCs with SFP | 89
- 10-Gigabit Ethernet DPC with XFP | 93
- 10-Gigabit Ethernet Enhanced DPCs with XFP | 96
- 10-Gigabit Ethernet Enhanced Ethernet Services DPC with XFP | 100
- 10-Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with XFP | 103
- 10-Gigabit Ethernet Enhanced Queuing IP Services DPC with XFP | 106
- Multi-Rate Ethernet Enhanced DPC with SFP and XFP | 109
- Multi-Rate Ethernet Enhanced Ethernet Services DPC with SFP and XFP | 113
- Multi-Rate Ethernet Enhanced Queuing IP Services DPC with SFP and XFP | 117
- Multiservices DPC | 121
- Tri-Rate Enhanced DPC | 124
- Tri-Rate Enhanced Ethernet Services DPC | 128

Gigabit Ethernet DPC with SFP

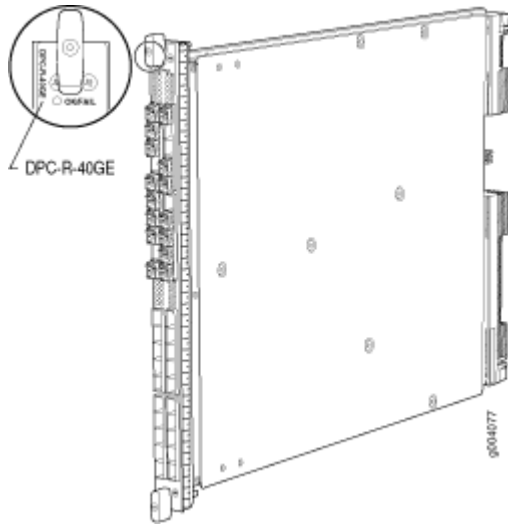

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.2 and later • End-of-life (see notification PSN-2009-06-400)
Description	<ul style="list-style-type: none"> • 40 Gigabit Ethernet ports • Power requirement: 6.98 A @ 48 V (335 W) • Weight: 13.1 lb (5.9 kg) • Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network • Model number: DPC-R-40GE-SFP • Name in the CLI: DPC 40x 1GE R
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 1 Gbps • Autonegotiation between Gigabit Ethernet circuit partners • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes

- Software features
- Optical diagnostics and related alarms
 - See "[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\)](#)" on page 409 for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 (bottom left row of 10 ports), 1 (bottom right row of 10 ports), 2 (top left row of 10 ports), or 3 (top right row of 10 ports)
- port: 0 through 9

For example, *ge-1/3/0* is the interface for port 0 in the top right row of 10 ports on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

NOTE: Do not install Gigabit Ethernet SFPs in the SONET/SDH port. The port will not recognize the SFP.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

Link LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The Link LEDs are labeled in groups of five:


- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**
- **2/0** for **2/0** through **2/4**
- **2/5** for **2/5** through **2/9**
- **3/0** for **3/0** through **3/4**
- **3/5** for **3/5** through **3/9**

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Gigabit Ethernet Enhanced DPC with SFP

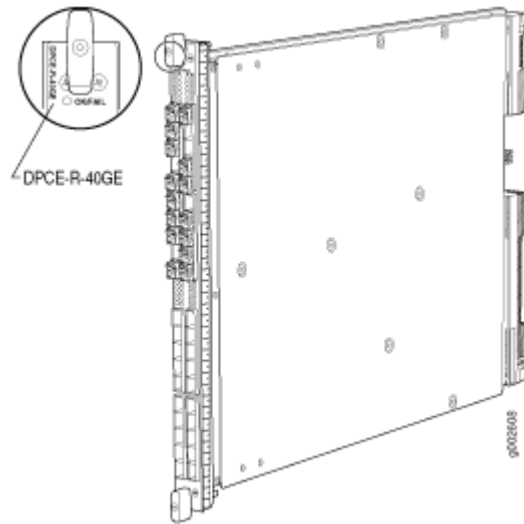

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.4 and later
Description	<ul style="list-style-type: none"> • 40 Gigabit Ethernet ports • Power requirement: 6.98 A @ 48 V (335 W) • Weight: 13.1 lb (5.9 kg) • Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network • Model number: DPCE-R-40GE-SFP • Name in the CLI: DPCE 40x 1GE R
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 1 Gbps • Autonegotiation between Gigabit Ethernet circuit partners • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes • Enhanced ASICs for increased performance and scalability of Layer 2 features

- Software features
- Optical diagnostics and related alarms
 - See "[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\)](#)" on page 409 for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: `ge-fpc/pic/port` where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 (bottom left row of 10 ports), 1 (bottom right row of 10 ports), 2 (top left row of 10 ports), or 3 (top right row of 10 ports) when installed horizontally
- port: 0 through 9

For example, `ge-1/3/0` is the interface for port 0 in the top right row of 10 ports on a DPC installed in slot 1.

For information on the interface numbering, see the *DPC Port and Interface Numbering* topic for the respective MX router.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

NOTE: Do not install Gigabit Ethernet SFPs in the SONET/SDH port. The port will not recognize the SFP.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

Link LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The Link LEDs are labeled in groups of five:


- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**
- **2/0** for **2/0** through **2/4**
- **2/5** for **2/5** through **2/9**
- **3/0** for **3/0** through **3/4**
- **3/5** for **3/5** through **3/9**

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Gigabit Ethernet Enhanced Ethernet Services DPC with SFP

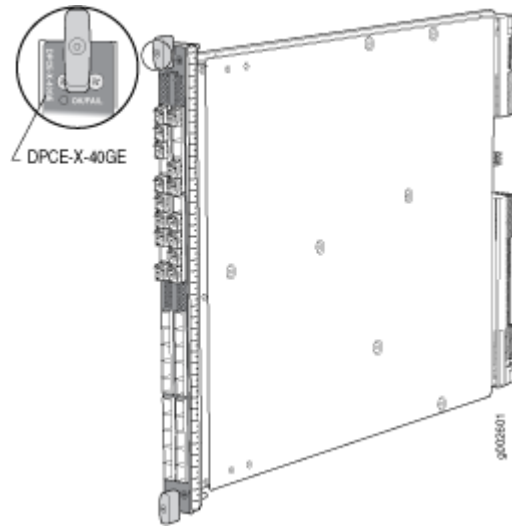

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.4 and later
Description	<ul style="list-style-type: none"> • 40 Gigabit Ethernet ports • Power requirement: 6.98 A @ 48 V (335 W) • Weight: 13.1 lb (5.9 kg) • Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network • Model number: DPCE-X-40GE-SFP • Name in the CLI: DPCE 40x 1GE X
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 1 Gbps • Autonegotiation between Gigabit Ethernet circuit partners • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes • Enhanced ASICs for increased performance and scalability of Layer 2 features

- Software features
- Optical diagnostics and related alarms
 - See "[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\)](#)" on page 420 for information about the protocols and applications that this DPC supports.

NOTE: The routing table is limited to 32,000 IP routes. This limitation applies to any manner in which the routes are learned, such as OSPF, RIP, and so on. The DPC supports BGP for L2 VPNs only.

Interfaces

Syntax: *ge-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 (bottom left row of 10 ports), 1 (bottom right row of 10 ports), 2 (top left row of 10 ports), or 3 (top right row of 10 ports)
- port: 0 through 9

For example, *ge-1/3/0* is the interface for port 0 in the top right row of 10 ports on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

NOTE: Do not install Gigabit Ethernet SFPs in the SONET/SDH port. The port will not recognize the SFP.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

Link LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The Link LEDs are labeled in groups of five:


- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**
- **2/0** for **2/0** through **2/4**
- **2/5** for **2/5** through **2/9**
- **3/0** for **3/0** through **3/4**
- **3/5** for **3/5** through **3/9**

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with SFP

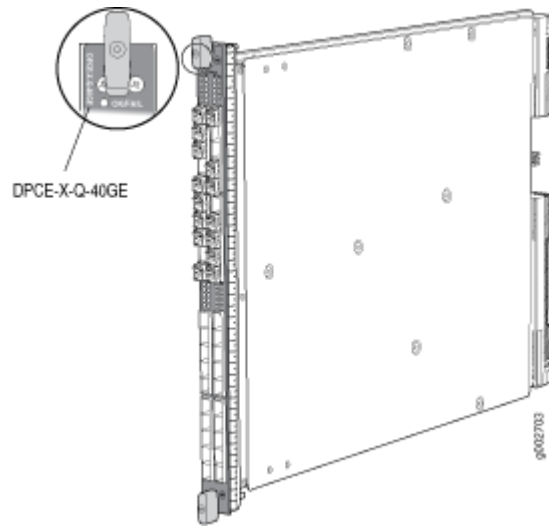

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.5 and later
Description	<ul style="list-style-type: none"> • 40 Gigabit Ethernet ports • Power requirement: 7.6 A @ 48 V (365 W) • Weight: 13.1 lb (5.9 kg) • Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network • Model number: DPCE-X-Q-40GE-SFP • Name in the CLI: DPCE 40x 1GE X EQ
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 1 Gbps • Autonegotiation between Gigabit Ethernet circuit partners • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes • Enhanced ASICs for increased performance and scalability of Layer 2 features

Software features

- Optical diagnostics and related alarms
- See "[Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs \(DPCE-X-Q\)](#)" on page 438 for information about the protocols and applications that this DPC supports.

NOTE: The routing table is limited to 32,000 IP routes. This limitation applies to any manner in which the routes are learned, such as OSPF, RIP, and so on. The DPC supports BGP for L2 VPNs only.

Interfaces

Syntax: *ge-fpc/pic/port* where:

- *fpc*: Slot in the router where the DPC is installed
- *pic*: 0 (bottom left row of 10 ports), 1 (bottom right row of 10 ports), 2 (top left row of 10 ports), or 3 (top right row of 10 ports)
- *port*: 0 through 9

For example, *ge-1/3/0* is the interface for port 0 in the top right row of 10 ports on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

NOTE: Do not install Gigabit Ethernet SFPs in the SONET/SDH port. The port will not recognize the SFP.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

Link LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The Link LEDs are labeled in groups of five:

- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**
- **2/0** for **2/0** through **2/4**
- **2/5** for **2/5** through **2/9**
- **3/0** for **3/0** through **3/4**
- **3/5** for **3/5** through **3/9**

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Gigabit Ethernet Enhanced Queuing IP Services DPCs with SFP

Figure 4: 20-Port Gigabit Ethernet Enhanced Queuing IP Services DPC with SFP


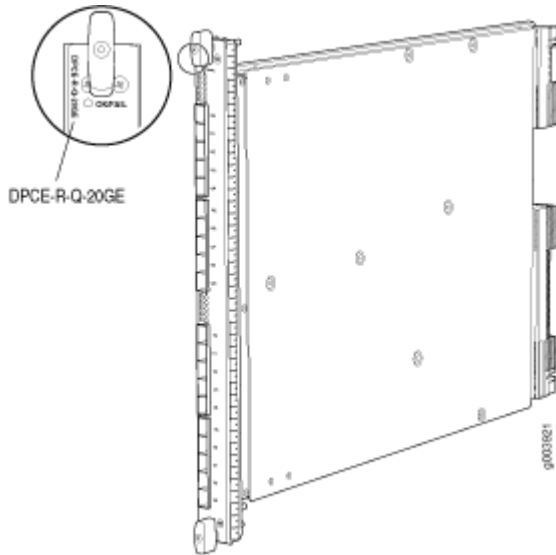


Figure 5: 40-Port Gigabit Ethernet Enhanced Queuing IP Services DPC with SFP

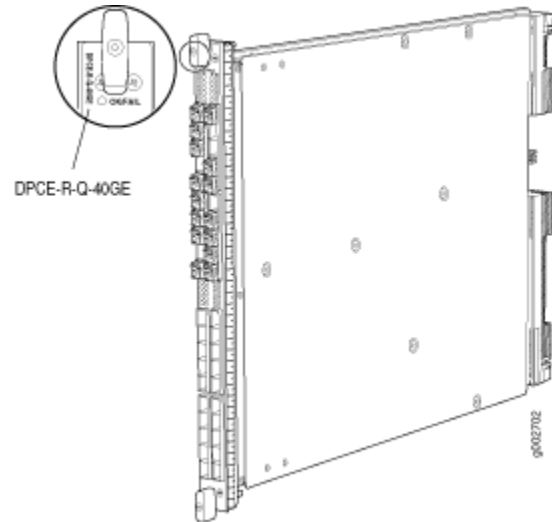

- Software release
- 20-port: Junos OS Release 9.1 and later
 - 40-port: Junos OS Release 8.5 and later
- End-of-life (see notification [PSN-2011-07-314](#))

Description	<p>20-port:</p> <ul style="list-style-type: none">• 20 Gigabit Ethernet ports• Power requirement: 4.2 A @ 48 V (200 W)• Weight: 13 lb (5.9 kg)• Model number: DPCE-R-Q-20GE-SFP• Name in the CLI: DPCE 20x 1GE R EQ <p>40-port:</p> <ul style="list-style-type: none">• 40 Gigabit Ethernet ports• Power requirement: 7.6 A @ 48 V (365 W)• Weight: 13.1 lb (5.9 kg)• Model number: DPCE-R-Q-40GE-SFP• Name in the CLI: DPCE 40x 1GE R EQ
Hardware features	<ul style="list-style-type: none">• High-performance throughput on each port at speeds up to 1 Gbps• Autonegotiation between Gigabit Ethernet circuit partners• Full-duplex mode• Maximum transmission units (MTUs) of up to 9192 bytes• Enhanced ASICs for increased performance and scalability of Layer 2 features
Software features	<ul style="list-style-type: none">• Optical diagnostics and related alarms• See "Protocols and Applications Supported by Enhanced Queuing IP Services DPCs (DPCE-R-Q)" on page 428 for information about the protocols and applications that this DPC supports.

Interfaces

Syntax: *ge-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic:
 - 20-port: 0 (left row of 10 ports), or 1 (right row of 10 ports)
 - 40-port: 0 (bottom left row of 10 ports), 1 (bottom right row of 10 ports), 2 (top left row of 10 ports), or 3 (top right row of 10 ports)
- port: 0 through 9

For example, *ge-1/1/0* is the interface for port 0 in the (top for 40-port) right row of 10 ports on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

NOTE: Do not install Gigabit Ethernet SFPs in the SONET/SDH port. The port will not recognize the SFP.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

Link LED, one green per port:

- Off—No link.
- On steadily—Link is active.


The Link LEDs are labeled in groups of five:

- 20-port:
 - **0/0** for **0/0** through **0/4**
 - **0/5** for **0/5** through **0/9**
 - **1/0** for **1/0** through **1/4**
 - **1/5** for **1/5** through **1/9**
- 40-port:
 - **0/0** for **0/0** through **0/4**
 - **0/5** for **0/5** through **0/9**
 - **1/0** for **1/0** through **1/4**
 - **1/5** for **1/5** through **1/9**
 - **2/0** for **2/0** through **2/4**
 - **2/5** for **2/5** through **2/9**
 - **3/0** for **3/0** through **3/4**
 - **3/5** for **3/5** through **3/9**

RELATED DOCUMENTATION

[MX Series DPC Overview](#) | 6

10-Gigabit Ethernet DPC with XFP

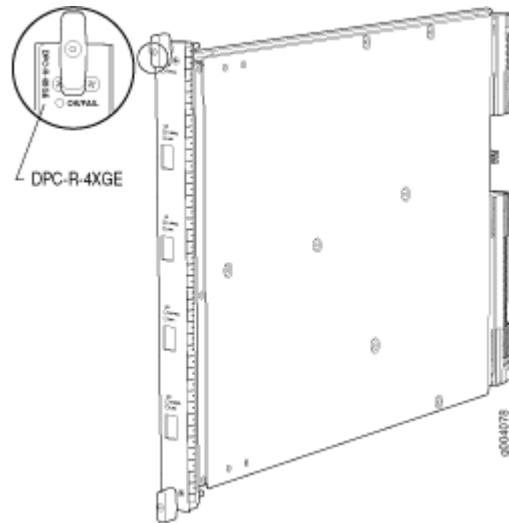

- Software release
- Junos OS Release 8.2 and later
 - End-of-life (see notification [PSN-2009-06-400](#))

-
- Description
- Four 10-Gigabit Ethernet ports
 - Power requirement: 6.46 A @ 48 V (310 W)
 - Weight: 13.1 lb (5.9 kg)
 - Model number: DPC-R-4XGE-XFP
 - Name in the CLI: DPC 4x 10GE R
-

- Hardware features
- High-performance throughput on each port at speeds up to 10 Gbps
 - WAN-PHY mode at 9.953 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Configurable WAN-PHY mode options
 - See "[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\)](#)" on page 409 for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 through 3
- port: 0

For example, *xe-1/3/0* is the interface for the last port on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

TUNNEL LED, one green per port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The **TUNNEL** and **LINK** LEDs are labeled top to bottom **0/0** through **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

10-Gigabit Ethernet Enhanced DPCs with XFP

Figure 6: 2-Port 10-Gigabit Ethernet Enhanced DPC with XFP


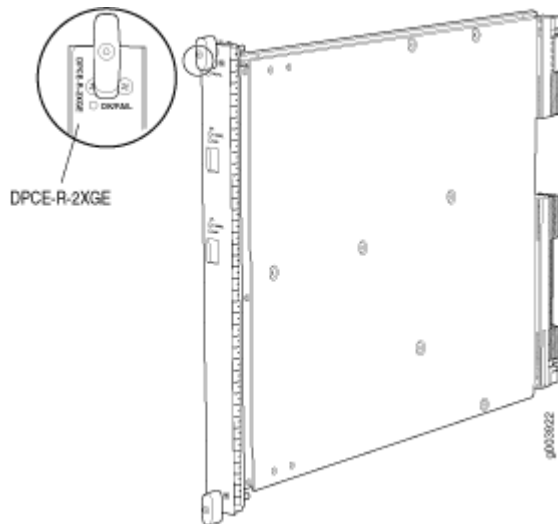


Figure 7: 4-Port 10-Gigabit Ethernet Enhanced DPC with XFP

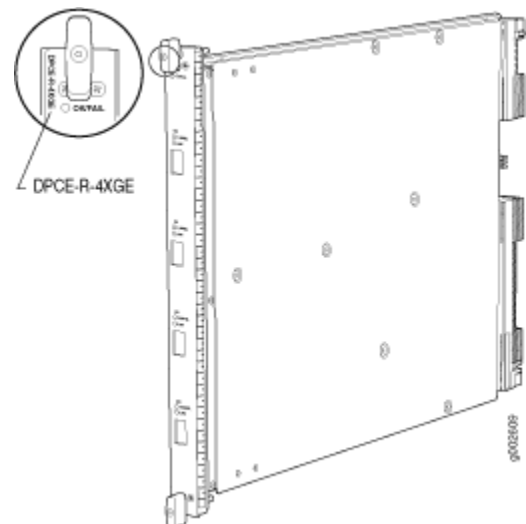

Software release

- 2-port: Junos OS Release 9.1 and later
End-of-life (see notification [PSN-2011-02-314](#))
- 4-port: Junos OS Release 8.4 and later

Description	<p>2-port:</p> <ul style="list-style-type: none">• Two 10-Gigabit Ethernet ports• Power requirement: 3.65 A @ 48 V (175 W)• Weight: 12 lb (5.4 kg)• Model number: DPCE-R-2XGE-XFP• Name in the CLI: DPCE 2x 10GE R <p>4-port:</p> <ul style="list-style-type: none">• Four 10-Gigabit Ethernet ports• Power requirement: 6.46 A @ 48 V (310 W)• Weight: 13.1 lb (5.9 kg)• Model number: DPCE-R-4XGE-XFP• Name in the CLI: DPCE 4x 10GE R
Hardware features	<hr/> <ul style="list-style-type: none">• High-performance throughput on each port at speeds up to 10 Gbps• WAN-PHY mode at 9.953 Gbps• LAN-PHY mode at 10.3125 Gbps• Full-duplex mode• Maximum transmission units (MTUs) of up to 9192 bytes• Enhanced ASICs for increased performance and scalability of Layer 2 features
Software features	<hr/> <ul style="list-style-type: none">• Configurable WAN-PHY mode options• See "Protocols and Applications Supported by DPCs and Enhanced DPCs (DPC and DPCE-R)" on page 409 for information about the protocols and applications that these DPCs support. <hr/>

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic:
 - 2-port: 0 or 1
 - 4-port: 0 through 3
- port: 0

For example, *xe-1/0/0* is the interface for the first port on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

TUNNEL LED, one green per port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.

The **TUNNEL** and **LINK** LEDs are labeled top to bottom:


- 2-port: **0/0** through **1/0**
 - 4-port: **0/0** through **3/0**
-

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

10-Gigabit Ethernet Enhanced Ethernet Services DPC with XFP

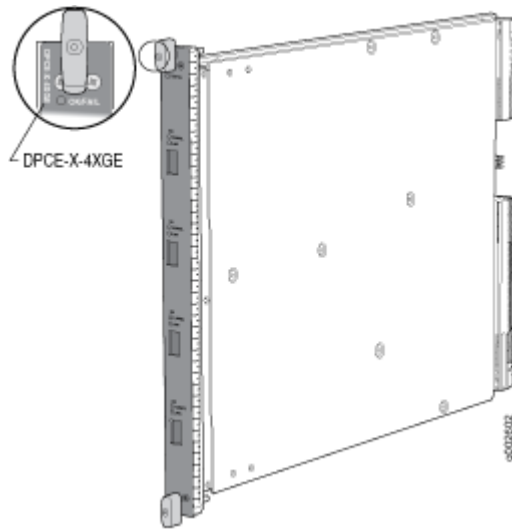

Software release	<ul style="list-style-type: none">• Junos OS Release 8.4 and later
Description	<ul style="list-style-type: none">• Four 10-Gigabit Ethernet ports• Power requirement: 6.46 A @ 48 V (310 W)• Weight: 13.1 lb (5.9 kg)• Model number: DPCE-X-4XGE-XFP• Name in the CLI: DPCE 4x 10GE X
Hardware features	<ul style="list-style-type: none">• High-performance throughput on each port at speeds up to 10 Gbps• WAN-PHY mode at 9.953 Gbps• LAN-PHY mode at 10.3125 Gbps• Full-duplex mode• Maximum transmission units (MTUs) of up to 9192 bytes• Enhanced ASICs for increased performance and scalability of Layer 2 features

- Software features
- Configurable WAN-PHY mode options
 - See "[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\)](#)" on page 420 for information about the protocols and applications that this DPC supports.

NOTE: The routing table is limited to 32,000 IP routes. This limitation applies to any manner in which the routes are learned, such as OSPF, RIP, and so on. The DPC supports BGP for L2 VPNs only.

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 through 3
- port: 0

For example, *xe-1/0/0* is the interface for the first port on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

TUNNEL LED, one green per port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.


The **TUNNEL** and **LINK** LEDs are labeled top to bottom **0/0** through **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

10-Gigabit Ethernet Enhanced Queuing Ethernet Services DPC with XFP

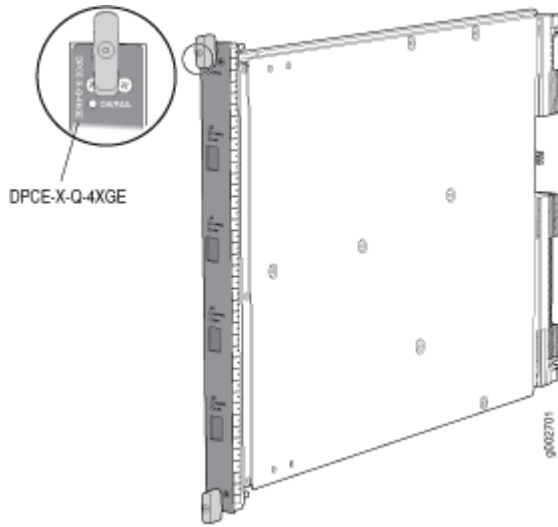

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.5 and later
Description	<ul style="list-style-type: none"> • Four 10-Gigabit Ethernet ports • Power requirement: 6.87 A @ 48 V (330 W) • Weight: 13.1 lb (5.9 kg) • Model number: DPCE-X-Q-4XGE-XFP • Name in the CLI: DPCE 4x 10GE X EQ
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 10 Gbps • WAN-PHY mode at 9.953 Gbps • LAN-PHY mode at 10.3125 Gbps • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes • Enhanced ASICs for increased performance and scalability of Layer 2 features

- Software features
- Configurable WAN-PHY mode options
 - See "[Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs \(DPCE-X-Q\)](#)" on page 438 for information about the protocols and applications that this DPC supports.

NOTE: The routing table is limited to 32,000 IP routes. This limitation applies to any manner in which the routes are learned, such as OSPF, RIP, and so on. The DPC supports BGP for L2 VPNs only.

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 through 3
- port: 0

For example, *xe-1/0/0* is the interface for the first port on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

TUNNEL LED, one green per port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.


The **TUNNEL** and **LINK** LEDs are labeled top to bottom **0/0** through **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

10-Gigabit Ethernet Enhanced Queuing IP Services DPC with XFP

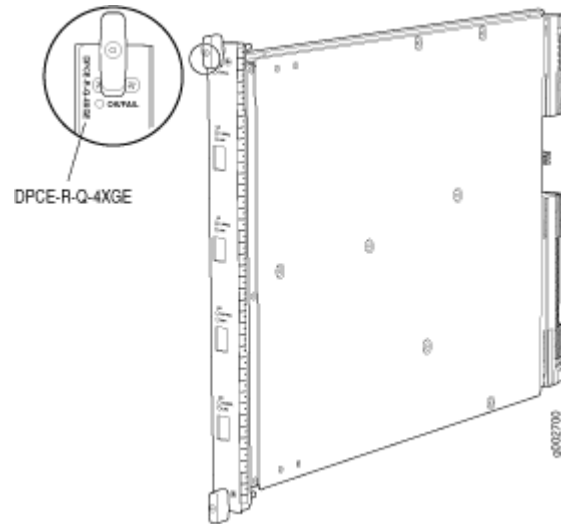

Software release	<ul style="list-style-type: none"> • Junos OS Release 8.5 and later • End-of-life (see notification PSN-2011-07-314)
Description	<ul style="list-style-type: none"> • Four 10-Gigabit Ethernet ports • Power requirement: 6.87 A @ 48 V (330 W) • Weight: 13.1 lb (5.9 kg) • Model number: DPCE-R-Q-4XGE-XFP • Name in the CLI: DPCE 4x 10GE R EQ
Hardware features	<ul style="list-style-type: none"> • High-performance throughput on each port at speeds up to 10 Gbps • WAN-PHY mode at 9.953 Gbps • LAN-PHY mode at 10.3125 Gbps • Full-duplex mode • Maximum transmission units (MTUs) of up to 9192 bytes • Enhanced ASICs for increased performance and scalability of Layer 2 features

- Software features
- Configurable WAN-PHY mode options
 - See "[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\)](#)" on page 428 for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: 0 through 3
- port: 0

For example, *xe-1/0/0* is the interface for the first port on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

TUNNEL LED, one green per port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.


The **TUNNEL** and **LINK** LEDs are labeled top to bottom **0/0** through **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Multi-Rate Ethernet Enhanced DPC with SFP and XFP

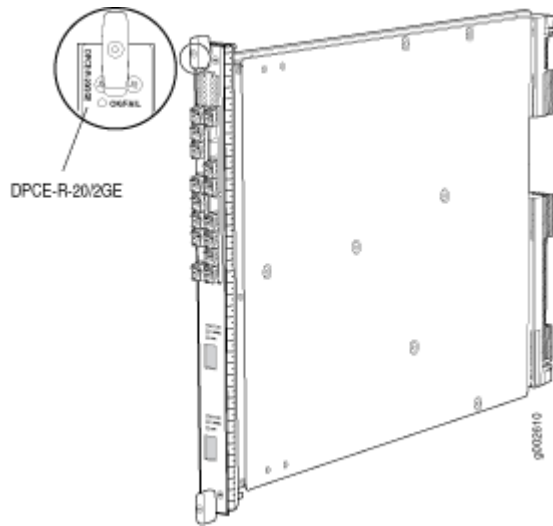

Software release

- Junos OS Release 9.2 and later

Description

- 20 Gigabit Ethernet ports
- 2 10-Gigabit Ethernet ports
- Power requirement: 6.94 A @ 48 V (333 W)
- Weight: 13.1 lb (5.9 kg)
- Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network
- Model number: DPCE-R-20GE-2XGE
- Name in the CLI: DPCE 20x 1GE + 2x 10GE R

- Hardware features
- SFP ports:
 - High-performance throughput on each port at speeds up to 1 Gbps
 - XFP ports:
 - High-performance throughput on each port at speeds up to 10 Gbps
 - WAN-PHY mode at 9.953 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Enhanced ASICs for increased performance and scalability of Layer 2 features
-

- Software features
- Configurable WAN-PHY mode options
 - Optical diagnostics and related alarms
 - See "[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\)](#)" on [page 409](#) for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *mediatype-fpc/pic/port* where:

- mediatype: ge or xe
- fpc: Slot in the router where the DPC is installed
- pic:
 - ge: 0 or 1
 - xe: 2 or 3
- port:
 - ge: 0 through 9
 - xe: 0

For example, xe-1/3/0 is the interface for the port labeled **PORT 3/0** on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.

TUNNEL LED, one green per XFP port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

The SFP Link LEDs are labeled in groups of five:

- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**


The XFP ports are labeled top to bottom **2/0** and **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Multi-Rate Ethernet Enhanced Ethernet Services DPC with SFP and XFP

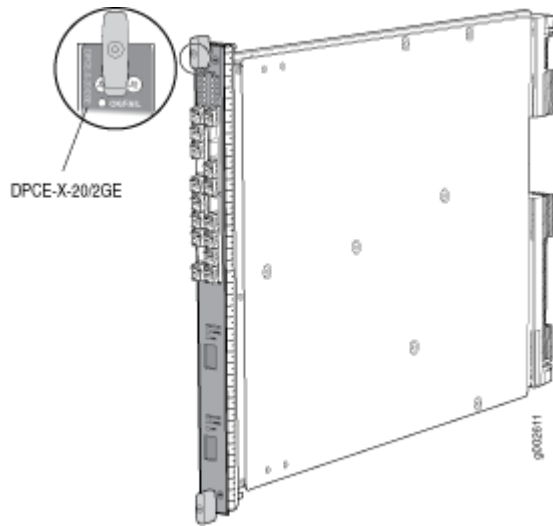

Software release	<ul style="list-style-type: none"> • Junos OS Release 9.2 and later • End-of-life (see notification PSN-2011-07-314)
Description	<ul style="list-style-type: none"> • 20 Gigabit Ethernet ports • 2 10-Gigabit Ethernet ports • Power requirement: 6.94 A @ 48 V (333 W) • Weight: 13.1 lb (5.9 kg) • Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network • Model number: DPCE-X-20GE-2XGE • Name in the CLI: DPCE 20x 1GE + 2x 10GE X

- Hardware features
- SFP ports:
 - High-performance throughput on each port at speeds up to 1 Gbps
 - XFP ports:
 - High-performance throughput on each port at speeds up to 10 Gbps
 - WAN-PHY mode at 9.953 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Enhanced ASICs for increased performance and scalability of Layer 2 features
-

- Software features
- Configurable WAN-PHY mode options
 - Optical diagnostics and related alarms
 - See ["Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\)" on page 420](#) for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *mediatype-fpc/pic/port* where:

- mediatype: ge or xe
- fpc: Slot in the router where the DPC is installed
- pic:
 - ge: 0 or 1
 - xe: 2 or 3
- port:
 - ge: 0 through 9
 - xe: 0

For example, xe-1/3/0 is the interface for the port labeled **PORT 3/0** on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.

TUNNEL LED, one green per XFP port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

The SFP Link LEDs are labeled in groups of five:

- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**


The XFP ports are labeled top to bottom **2/0** and **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Multi-Rate Ethernet Enhanced Queuing IP Services DPC with SFP and XFP

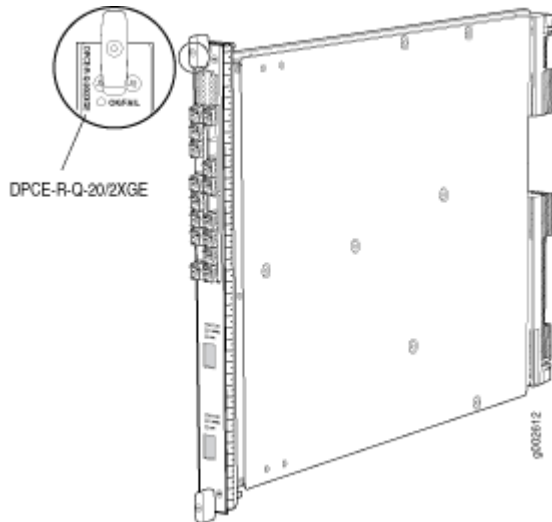

Software release

- Junos OS Release 9.3 and later

Description

- 20 Gigabit Ethernet ports
 - 2 10-Gigabit Ethernet ports
 - Power requirement: 6.98 A @ 48 V (335 W)
 - Weight: 13.1 lb (5.9 kg)
 - Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network
 - Model number: DPCE-R-Q-20GE-2XGE
 - Name in the CLI: DPCE 20x 1GE + 2x 10GE R EQ
-

- Hardware features
- SFP ports:
 - High-performance throughput on each port at speeds up to 1 Gbps
 - XFP ports:
 - High-performance throughput on each port at speeds up to 10 Gbps
 - WAN-PHY mode at 9.953 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Enhanced ASICs for increased performance and scalability of Layer 2 features
-

- Software features
- Configurable WAN-PHY mode options
 - Optical diagnostics and related alarms
 - See ["Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\)"](#) on page 428 for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *mediatype-fpc/pic/port* where:

- mediatype: ge or xe
- fpc: Slot in the router where the DPC is installed
- pic:
 - ge: 0 or 1
 - xe: 2 or 3
- port:
 - ge: 0 through 9
 - xe: 0

For example, xe-1/3/0 is the interface for the port labeled **PORT 3/0** on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

You can install any transceiver supported by the DPC. For information about installing and removing transceivers, see the hardware guide for your router.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is active.

TUNNEL LED, one green per XFP port:

- Off—Normal operating mode.
- On steadily—Port configured in tunnel mode.

The SFP Link LEDs are labeled in groups of five:

- **0/0** for **0/0** through **0/4**
- **0/5** for **0/5** through **0/9**
- **1/0** for **1/0** through **1/4**
- **1/5** for **1/5** through **1/9**


The XFP ports are labeled top to bottom **2/0** and **3/0**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Multiservices DPC

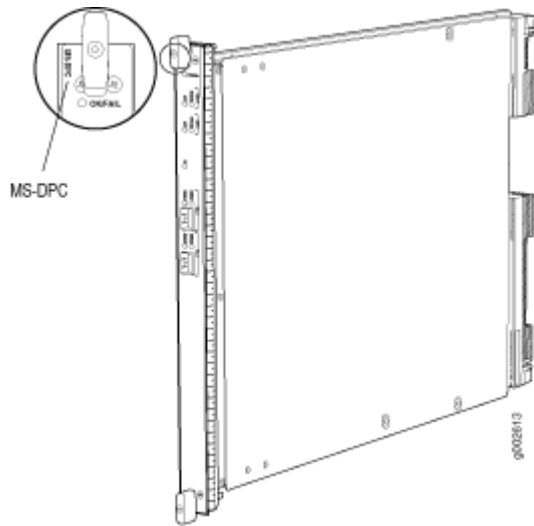

Software release

- Junos OS Release 9.3 and later

Description

- Power requirement: 5.52 A @ 48 V (265 W)
 - Weight: 14.7 lb (6.7 kg)
 - Supports tunnel services. This feature is included with the DPC and does not require an individual license.
 - Individual licenses must be purchased for additional services.
 - Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network
 - The maximum number of supported MS-DPCs is as follows except where noted in "[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\)](#)" on page 445:
 - MX240 router: 2
 - MX480 router: 4
 - MX960 router: 6
 - Model number: MS-DPC
-

- Hardware features
- Active monitoring on up to 10 million flows
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Two Multiservices Processing Units (MSPUs) per DPC, which include two 1.1Ghz multicore CPUs, each with 4GB of memory for processing integrated services
-

- Software features
- Support for up to 12,000 service sets
 - See "[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\)](#)" on page 445 for information about the protocols and applications that this DPC supports.
-

- Interfaces
- Syntax: *mediatype- fpc/ pic/ port* where:
- mediatype: gr, pc, pd, etc
 - fpc: Slot in the router where the MPC is installed
 - pic: 0 or 1
 - port: 0
- NOTE:** Port number reflects the internal interface and is not a physical port.
-

- Cables and connectors
- TIP:** You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.
- The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.
- SFPs are not supported.
-

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

STATUS LED, one tricolor per MSPU:

- Off—MSPU is offline. If both MSPUs are offline it is safe to remove the DPC from the chassis.
- Green—MSPU is operating normally.
- Yellow—MSPU is initializing.
- Red—MSPU has an error or failure.

Application (**APP**) LED, one tricolor per MSPU:

- Off—Service is not running on the MSPU.
- Green—Service is running on the MSPU under acceptable load.
- Yellow—Service on the MSPU is overloaded.



RELATED DOCUMENTATION[MX Series DPC Overview | 6](#)[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Tri-Rate Enhanced DPC



DPCE-R-40GE-TX

Port LEDs

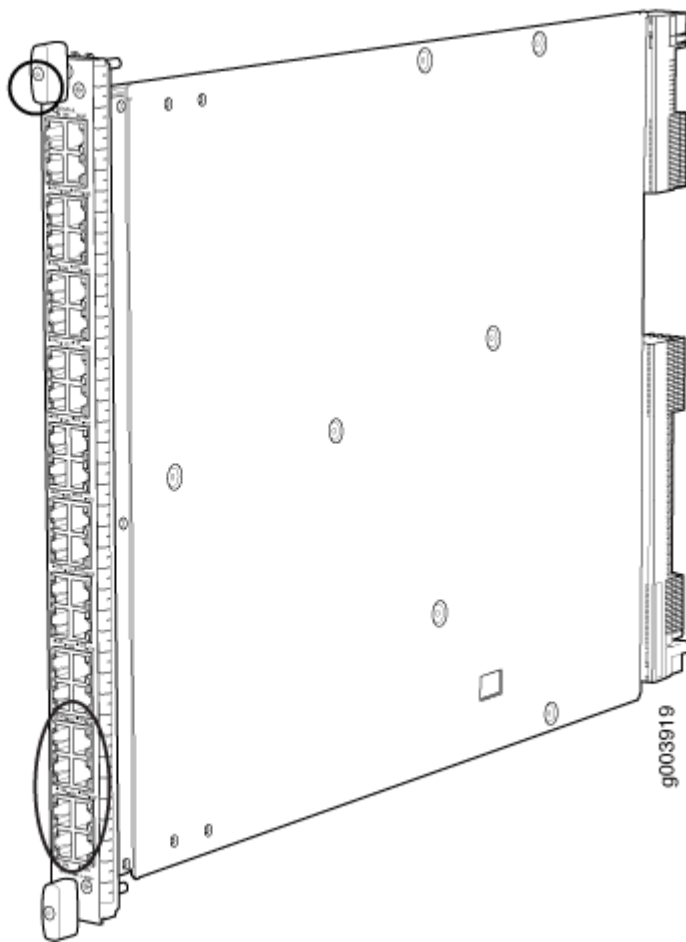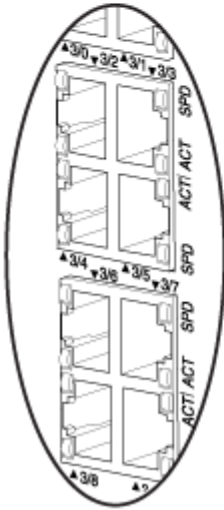

Software release

- Junos OS Release 9.1 and later

- Description
- 40 autonegotiating 10BASE-T, 100BASE-TX, or 1000BASE-T Megabit Ethernet ports
 - Power requirement: 6.67 A @ 48 V (320 W)
 - Weight: 14.5 lb (6.6 kg)
 - Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network
 - Model number: DPCE-R-40GE-TX
 - Name in the CLI: DPCE 40x 1GE R TX
-

- Hardware features
- High-performance throughput on each port at speeds of 10 Mbps, 100 Mbps, or 1000 Mbps
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Enhanced ASICs for increased performance and scalability of Layer 2 features
 - There are four sets of 10 ports labeled:
 - 0/0 through 0/9
 - 1/0 through 1/9
 - 2/0 through 2/9
 - 3/0 through 3/9
-

- Software features
- See ["Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\)" on page 409](#) for information about the protocols and applications that this DPC supports.
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- fpc: Slot in the router where the DPC is installed
- pic: Grouping of 10-ports, numbered 0 through 3
- port: 0 through 9

For example, ge-1/3/0 is the interface for port 0 (labeled **3/0**) in the right-most grouping of ports on a DPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- Connector: Four-pair, Category 5 shielded twisted-pair connectivity through an RJ-45 connector
- Pinout:
 - Junos OS Release 9.1: MDI
 - Junos OS Release 9.2 and later: MDI, MDI crossover
- Maximum distance: 328 ft/100 m

CAUTION: Do not use RJ-45 cables with strain-relief boots exceeding 1.5 mm from the bottom of the connector. Cable boots that exceed this measurement can damage the port.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

ACT LED, one green per port:

- Off—No active traffic.
- Blinking—Link is active.

SPD LED, one bicolor:

- Green—DPC is functioning in 1000BASE-T mode.
- Yellow—DPC is functioning in 10BASE-T or 100BASE-TX mode.
- Off—No link.


The **ACT** and **SPD** LEDs are located on either side of the ports labeled horizontally and top to bottom **0/0** through **3/9**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

Tri-Rate Enhanced Ethernet Services DPC

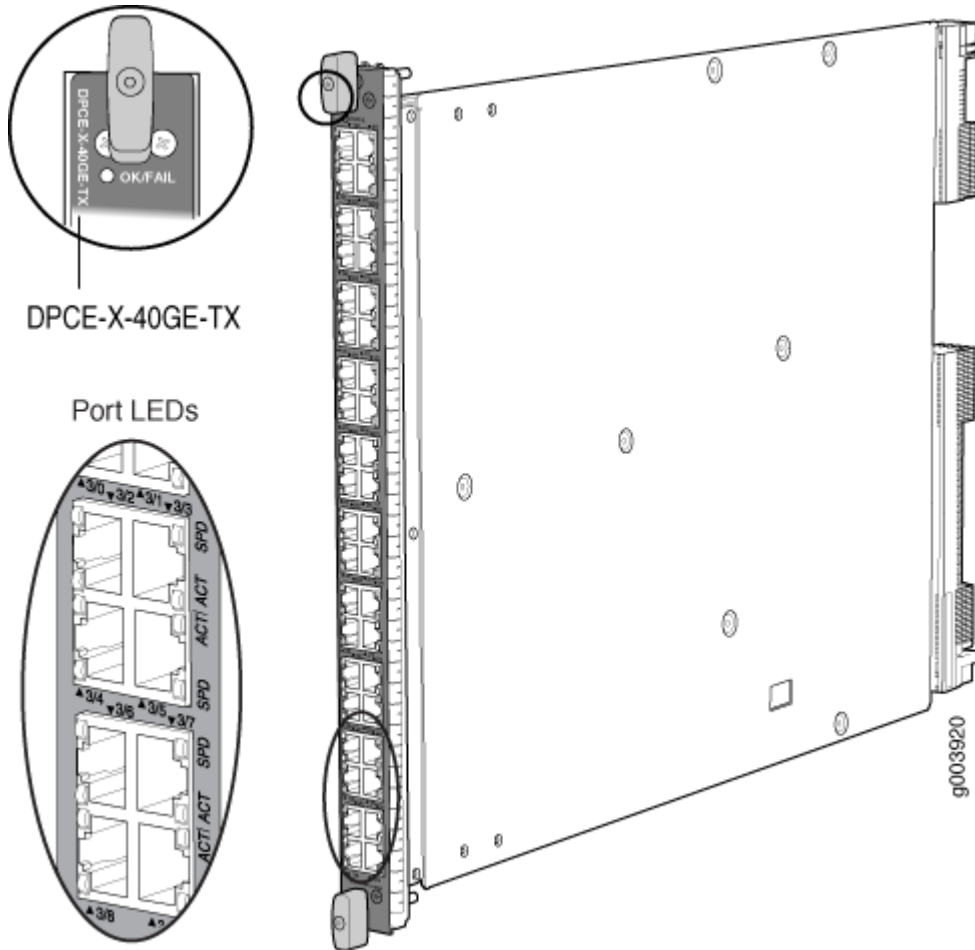

Software release

- Junos OS Release 9.1 and later
- EOL (see [PSN-2009-06-400](#))

- Description
- 40 autonegotiating 10BASE-T, 100.BASE-TX, or 1000BASE-T Megabit Ethernet ports
 - Power requirement: 6.67 A @ 48 V (320 W)
 - Weight: 14.5 lb (6.6 kg)
 - Supports large Ethernet frame sizes for more efficient throughput across the intra-POP network
 - Model number: DPCE-X-40GE-TX
 - Name in the CLI:
-

- Hardware features
- High-performance throughput on each port at speeds of 10 Mbps, 100 Mbps, or 1000 Mbps
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Full-duplex mode
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Enhanced ASICs for increased performance and scalability of Layer 2 features
-

- Software features
- See "[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\)](#)" on page 420 for information about the protocols and applications that this DPC supports.
-

- Interfaces
- Syntax: *ge-fpc/pic/port* where:
- fpc: Slot in the router where the DPC is installed
 - pic: Grouping of 10-ports, numbered 0 through 3
 - port: 0 through 9
- For example, ge-1/3/0 is the interface for port 0 (labeled **3/0**) in the right-most grouping of ports on a DPC installed in slot 1.
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- Connector: Four-pair, Category 5 shielded twisted-pair connectivity through an RJ-45 connector
- Pinout:
 - Junos OS Release 9.1: MDI
 - Junos OS Release 9.2 and later: MDI, MDI crossover
- Maximum distance: 328 ft/100 m

CAUTION: Do not use RJ-45 cables with strain-relief boots exceeding 1.5 mm from the bottom of the connector. Cable boots that exceed this measurement can damage the port.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—DPC is functioning normally.
- Blinking green—DPC is transitioning online or offline.
- Red—DPC has failed.

ACT LED, one green per port:

- Off—No active traffic.
- Blinking—Link is active.

SPD LED, one bicolor:

- Green—DPC is functioning in 1000BASE-T mode.
- Yellow—DPC is functioning in 10BASE-T or 100BASE-TX mode.
- Off—No link.

The **ACT** and **SPD** LEDs are located on either side of the ports labeled horizontally and top to bottom **0/0** through **3/9**.

RELATED DOCUMENTATION

[MX Series DPC Overview | 6](#)

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

MX Series SPC Description

IN THIS CHAPTER

- [MX-SPC3 Services Card | 132](#)


MX-SPC3 Services Card

The MX-SPC3 Services Card is supported on MX240, MX480, and MX960 routers. It provides additional processing power to run the Next Gen Services.

It contains two Services Processing Units (SPUs) with 128 GB of memory per SPU. Line cards such as DPCs, MICs, and MPCs intelligently distribute all traffic traversing the router to the SPUs to have services processing applied to it (see [Figure 8 on page 132](#)).

You can install the MX-SPC3 in any of the slots that are not reserved for Switch Control Board (SCB). If a slot is not occupied by a card, you must install a blank panel to shield the empty slot and to allow cooling air to circulate properly through the device.

Figure 8: MX-SPC3 Services Card

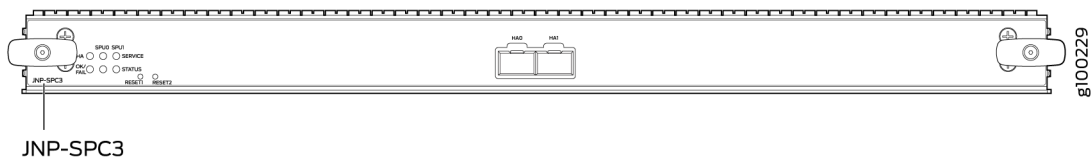

Software release ● Junos OS Release 19.3R2 and later

Description	<p>Services Processing Card (SPC) with two SPUs of 256 GB memory.</p> <ul style="list-style-type: none">• Power requirement: 650 W maximum• Weight: Approximately 18 lb (8.3 kg)
Hardware features	<ul style="list-style-type: none">• Two 10-Gigabit Ethernet small form-factor pluggable plus (SFP+) chassis cluster control ports for connecting multiple devices into a redundant chassis cluster.• Fabric interfaces• One Gigabit Ethernet switch that provides control connectivity to the Routing Engine.• Two interfaces from the SCBs that enable the boards to be powered on and controlled.• Physical SPC connectors• Midplane connectors and power circuitry• Each SPU includes:<ul style="list-style-type: none">• Two 2.3-GHz CPUs• One Crypto Engine• 128 GB memory• Two 128 GB solid state-drives (SSDs).• LEDs on the faceplate that indicate the SPC and SPU status.
Supported Slots	<ul style="list-style-type: none">• MX240—Any slot, except the bottom slot 0 which is reserved for SCB/RE.• MX480—Any slot, except the bottom slots 0 or 1 which are reserved for SCB/RE.• MX960—Any slot, except slot 11, and slots 0 or 1 which are reserved for SCB/RE.
Compatibility	<p>The MX-SPC3 services card is compatible end-to-end with the MX Series Switch Fabrics, Routing Engines and MPC line cards. See Table 23 on page 135:</p>

LEDs

OK/FAIL LED, one bicolor:

- Steady green–The SPC is operating normally.
- Red–The SPC has failed and is not operating normally.
- Off–The SPC is powered down.

STATUS LED, one tricolor for each SPU **SPU 0** and **SPU 1**:

- Off–The SPU is offline.
- Blinking Amber–The SPU is initializing.
- Green–The SPU initialization is done and it is operating normally.
- Red–The SPU has encountered an error or a failure.

SERVICE LED, one tricolor for each SPU **SPU 0** and **SPU 1**:

- Off–The SPU is offline.
- Blinking Red–The SPU initialization is done.
- Blinking Amber–Service is initializing on the SPU.
- Green–Service is running on the SPU under acceptable load.
- Solid Red–Service encountered an error or a failure.

HA LED, one tricolor:

- Green–Clustering is operating normally. All cluster members and monitored links are available, and no error conditions are detected.
- Red–A critical alarm is present on clustering. A cluster member is missing or unreachable, or the other node is no longer part of a cluster because it has been disabled by the dual membership and detection recovery process in reaction to a control-link or fabric-link failure.
- Amber–All cluster members are present, but an error condition has compromised the performance and resiliency of the cluster. The reduced bandwidth could cause packets to be dropped or could result in reduced resiliency because a single point of failure might exist. The error condition might be caused by:

- The loss of chassis cluster links which causes an interface monitoring failure.
- An error in an SPU or NPU.
- Failure of the spu-monitoring or cold-sync-monitoring processes.
- A chassis cluster IP monitoring failure.
- Off–The node is not configured for clustering or it has been disabled by the dual membership and detection recovery process in reaction to a control link or fabric link failure.

LINK/ACT LED, one for each of the two ports **CHASSIS CLUSTER CONTROL 0** and **CHASSIS CLUSTER CONTROL 1**:

- Green–Chassis cluster control port link is active.
- Off–No link.

Table 23: MX-SPC3 Services Card Compatibility with MX Series Switch Fabrics, Routing Engines and MPC Line Cards

Switch Fabric	Route Engine	MPC Line Cards
SCBE	RE-S-1800X4-16G-UPG-BB RE-S-1800X4-32G-UB	MPC2E-3D MPC2-3D-NG MPC3E and MPC3E-3D-NG MPC4E-3D MPC-3D-16XGE

Table 23: MX-SPC3 Services Card Compatibility with MX Series Switch Fabrics, Routing Engines and MPC Line Cards (Continued)

Switch Fabric	Route Engine	MPC Line Cards
SCBE2	RE-S-1800X4-16G-UPG-BB	MPC2E-3D
	RE-S-1800X4-32G-UB	MPC2-3D-NG
	RE-S-X6-64G-UB	MPC3E and MPC3E-3D-NG
	RE-S-X6-64G-S	MPC4E-3D
	RE-S-X6-64G-S-R	MPC5E and MPC5EQ
	RE-S-X6-64G-S-BB	MPC7E and MPC7EQ
	RE-S-X6-128G-S-S	MPC-3D-16XGE
	RE-S-X6-128G-S-R	
	RE-S-X6-128G-S-BB	

Table 24 on page 136 provides a summary of Next Gen Services supported by MX-SPC3.

Table 24: Next Gen Services Supported by MX-SPC3 Services Card

Next Gen Services Supported by MX-SPC3 Services Card		
Carrier Grade NAT	19.3R2	Basic-NAT44
		Basic-NAT66
		Dynamic-NAT44
		Static Destination NAT
		Basic-NAT-PT
		NAPT-PT

Table 24: Next Gen Services Supported by MX-SPC3 Services Card *(Continued)*

Next Gen Services Supported by MX-SPC3 Services Card		
		NAPT44
		NAPT66
		Port Block Allocation
		Deterministic-nat44 and nat64
		End Point Independent Mapping (EIM)/End Point
		Independent Filtering (EIF)
		Persistent NAT – Application Pool Pairing (APP)
		Twice-NAT44 – Basic, Dynamic and NAPT
		NAT64
		XLAT-464
		NPTv6
	20.1R1	Port Control Protocol (PCP) – v1 and v2
	20.2R1	DS-Lite

Table 24: Next Gen Services Supported by MX-SPC3 Services Card *(Continued)*

Next Gen Services Supported by MX-SPC3 Services Card		
		NAT46
Stateful Firewall Services	19.3R2	
Intrusion Detection Services (IDS)		
Traffic Load Balancer		
DNS Request Filtering		
Aggregated Multiservices Interfaces		
Inter-chassis High Availability	19.3R2	CGNAT, Stateful Firewall, and IDS Flows
URL Filtering	20.1R1	

See "[Protocols and Applications Supported by MX-SPC3 Services Card](#)" on page 449 for information about the protocols and applications that this SPC3 supports.

RELATED DOCUMENTATION

| *MX-SPC3 Services Card Overview and Support on MX240, MX480, and MX960 Routers*


MX Series MPC Descriptions

IN THIS CHAPTER

- MPC-3D-16XGE-SFPP | 140
- Multiservices MPC | 144
- MPC1 | 147
- MPC1E | 149
- MPC1 Q | 151
- MPC1E Q | 153
- MPC2 | 155
- MPC2E | 157
- MPC2 Q | 159
- MPC2E Q | 161
- MPC2 EQ | 163
- MPC2E EQ | 165
- MPC2E P | 167
- MPC2E NG | 169
- MPC2E NG Q | 171
- MPC3E | 174
- MPC3E-3D-NG | 176
- MPC3E-3D-NG-Q | 178
- 32x10GE MPC4E | 181
- 2x100GE + 8x10GE MPC4E | 184
- 6x40GE + 24x10GE MPC5E | 187
- 6x40GE + 24x10GE MPC5EQ | 192
- 2x100GE + 4x10GE MPC5E | 195
- 2x100GE + 4x10GE MPC5EQ | 198
- MPC6E | 201
- MPC7E-MRATE | 204

- MPC7E-10G | 207
- MPC8E | 210
- MPC9E | 213
- MPC10E-10C-MRATE | 215
- MPC10E-15C-MRATE | 220
- MX2K-MPC11E Modular Port Concentrator | 224

MPC-3D-16XGE-SFPP

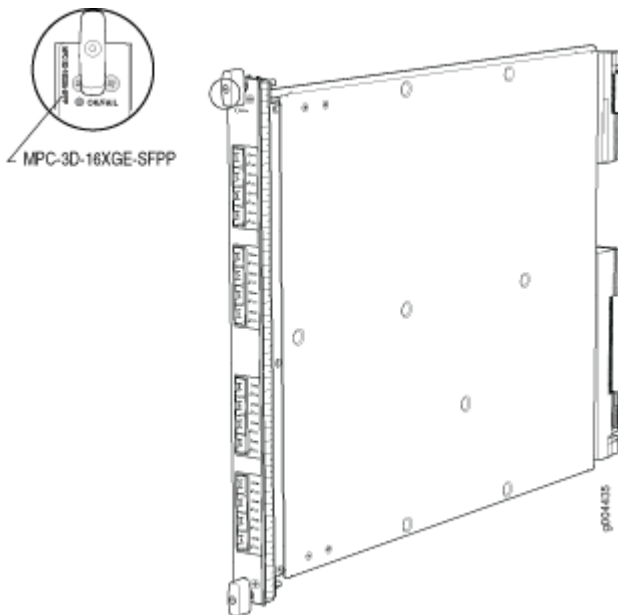

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 10.0R2 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later
-

Description	<ul style="list-style-type: none">• Fixed configuration MPC with sixteen 10-Gigabit Ethernet ports• Power requirement: 9.17 A @ 48 V (440 W)• Weight: 18.35 lb (8.3 kg)• Model numbers:<ul style="list-style-type: none">• MPC-3D-16XGE-SFPP• MPC-3D-16XGE-SFPP-R-B• Name in the CLI:<ul style="list-style-type: none">• MPC 3D 16x10GE• MPC 3D 16x10GE EM
Hardware features	<ul style="list-style-type: none">• High-performance throughput on each port at speeds up to 10 Gbps• Four fully programmable Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services• One Junos Trio chipset per set of four ports• LAN-PHY mode at 10.3125 Gbps <p>NOTE: The 16x10GE 3D MPC does not support WAN-PHY mode.</p>
Software features	<ul style="list-style-type: none">• Optical diagnostics and related alarms• See "Protocols and Applications Supported on MPCs for MX Series Routers" on page 451 for information about the protocols and applications that this MPC supports.

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the MPC is installed
- pic: Grouping of 4 ports, numbered 0 through 3
- port: 0 through 3

For example, *xe-1/3/3* is the interface for the last port (labeled **3/3**) on an MPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: The 16x10GE 3D MPC does not support WAN-PHY mode.

NOTE: SFPP-10G-CT50-ZR is not NEBS compliant when plugged into the MPC-3D-16XGE-SFPP. If the ambient air temperature exceeds 55°C (131°F), Junos OS disables the transmitter, which takes the optical transceiver offline.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

Enable/disable LED, one bicolor per port:

- Green—Port is enabled.
- Yellow—Port is not functioning normally.
- Off—Port is disabled.

The enable/disable LEDs are labeled in groups of four:

- **0/0** through **0/3**
- **1/0** through **1/3**
- **2/0** through **2/3**
- **3/0** through **3/3**

RELATED DOCUMENTATION


[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

Media MTU Sizes by Interface Type

Multiservices MPC

Figure 9: Multiservices MPC

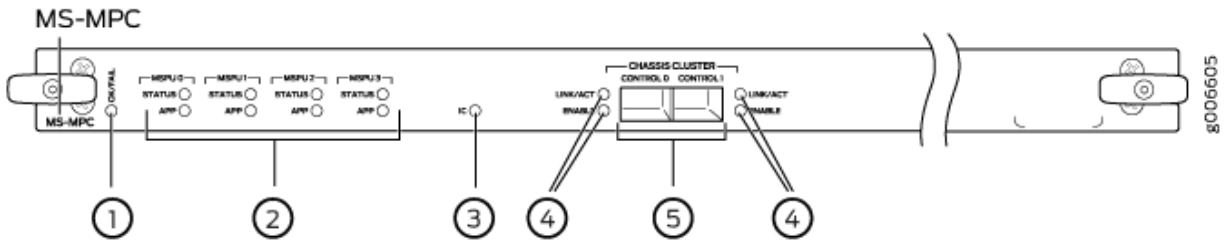

1- OK/Fail LED	4- Link/Act and Enable LEDs
2- MSPU Status and APP LEDs	5- Control 0 and Control 1 ports
3- IC LED	

Software release • Junos OS Release 13.2R4 and later

For information on which MPCs are supported on MX Series routers, see ["MPCs Supported by MX Series Routers"](#) on page 16.

Description

- Power requirement: 12.2 Amps @ 48 V (585 W)
- Weight: 14 lbs.
- Model number: MS-MPC
- Name in the CLI: MS-MPC

- Hardware features
- One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services.
 - Enhanced memory with 128 GB of memory (32 GB per NPU) and processing capabilities.
 - NPU CPU Clock Cycle of 1.2GHz.
 - Four NPUs per MPC.
 - Works with SCBs and SCBEs.
 - Interoperable with MS-DPCs. Both MS-MPCs and MS-DPCs can co-exist in the same chassis.
-

- Software features
- Active flow monitoring and export of flow monitoring version 9 records based on RFC 3954
 - IP Security (IPsec) encryption
 - Network Address Translation (NAT) for IP addresses
 - Port Address Translation (PAT) for port numbers
 - Traffic sampling
 - Stateful firewall with packet inspection—detects SYN attacks, ICMP and UDP floods, and ping-of-death attacks
 - Network Attack Protection (NAP)
 - Support for up to 6000 service sets
 - Support for MTUs up to 9192 bytes.
 - Multiple services can be supported. See [Junos OS Services Interfaces Library for Routing Devices](#) for more information.
 - See "[Protocols and Applications Supported by the MS-MIC and MS-MPC](#)" on [page 584](#) for information about the protocols and applications that this MIC supports.
-

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

IC LED—Reserved for future use.

STATUS LED, one tricolor per MSPU:

- Off—MSPU is offline. If both MSPUs are offline it is safe to remove the DPC from the chassis.
- Green—MSPU is operating normally.
- Yellow—MSPU is initializing.
- Red—MSPU has an error or failure.

Application (**APP**) LED, one tricolor per MSPU:

- Off—Service is not running on the MSPU.
- Green—Service is running on the MSPU under acceptable load.
- Yellow—Service on the MSPU is reconfiguring.
- Red—Service on the MSPU has failed.

Activity (**LINK/ACT**) LED, one per control port:

- Off—No link.
- Green—Chassis cluster control port link is active.


ENABLE LED, one per control port:

- Off—Chassis cluster control port is disabled.
- Green—Chassis cluster control port is enabled.

RELATED DOCUMENTATION

| [MX Series MPC Overview](#) | 15

MPC1

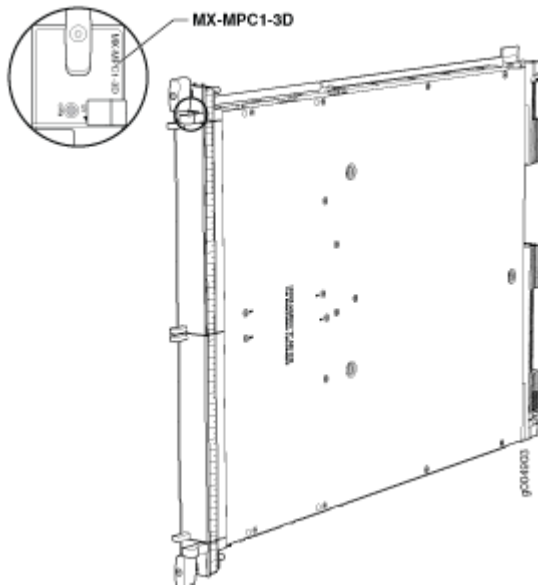

- Software release
- MX240, MX480, and MX960 routers: Junos OS Release 10.2 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

-
- Description
- Power requirement: 3.4 A @ 48 V (165 W)
 - Weight: 13.8 lb (6.3 kg)
 - Model number: MX-MPC1-3D
 - Name in the CLI: MPC Type 1 3D
-

- Hardware features
- Two slots for MICs labeled **PIC 0/1** and **PIC 2/3**
 - One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
-

- Software features
- See "[Protocols and Applications Supported on MPCs for MX Series Routers](#)" on page 451 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL** LED, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC1E

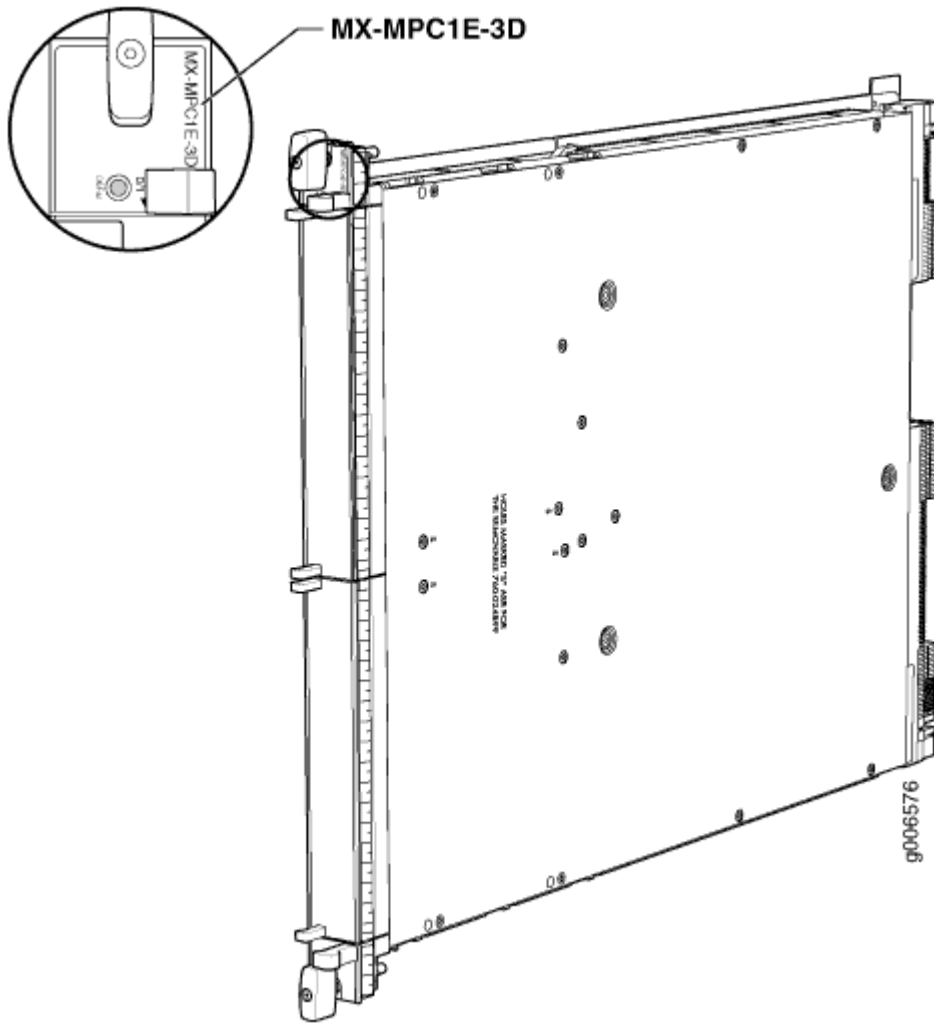

Software release

- MX240, MX480, and MX960 routers: Junos OS Release 11.2R4 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 3.4 A @ 48 V (165 W)• Weight: 13.8 lb (6.3 kg)• Model number: MX-MPC1E-3D• Name in the CLI: MPCE Type 1 3D
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported on the MPC1E for MX Series Routers" on page 473 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC1 Q

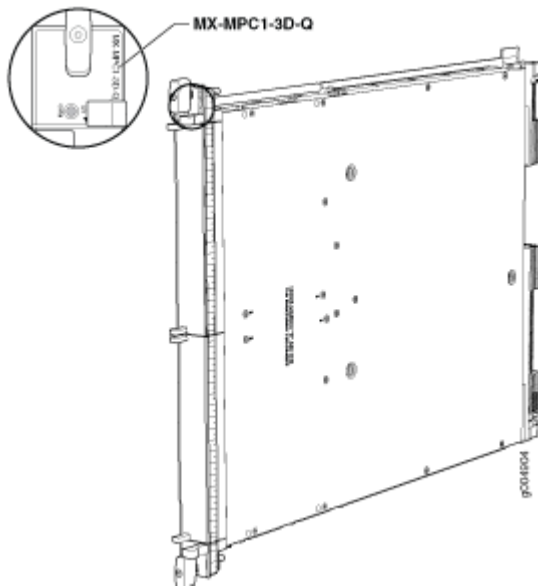

- Software release
- MX240, MX480, and MX960 routers: Junos OS Release 10.2 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

-
- Description
- Power requirement: 3.65 A @ 48 V (175 W)
 - Weight: 13.8 lb (6.3 kg)
 - Model number: MX-MPC1-3D-Q
 - Name in the CLI: MPC Type 1 3D Q

-
- Hardware features
- Two slots for MICs labeled **PIC 0/1** and **PIC 2/3**
 - One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
-

- Software features
- See "[Protocols and Applications Supported on MPCs for MX Series Routers](#)" on page 451 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL LED**, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC1E Q

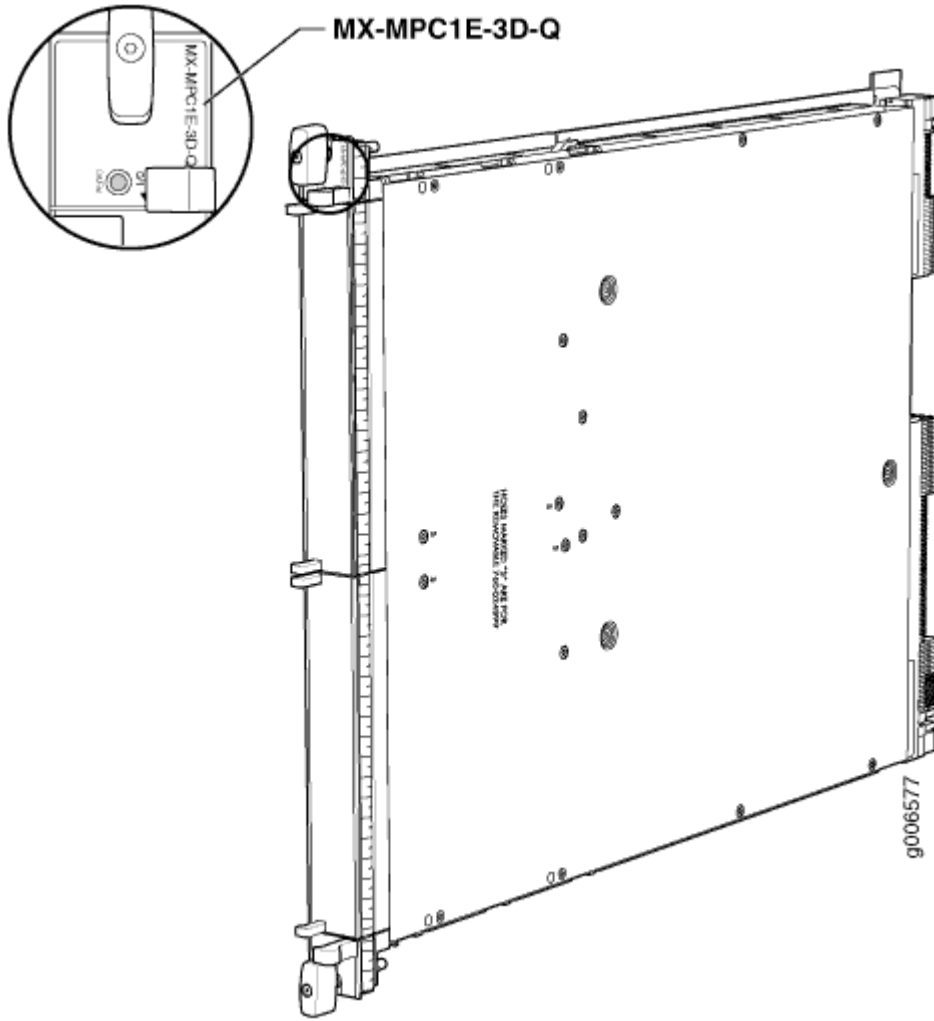

Software release

- MX240, MX480, and MX960 routers: Junos OS Release 11.2R4 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 3.65 A @ 48 V (175 W)• Weight: 13.8 lb (6.3 kg)• Model number: MX-MPC1E-3D-Q• Name in the CLI: MPCE Type 1 3D Q
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• One Junos Trio chipset for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported on the MPC1E for MX Series Routers" on page 473 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2

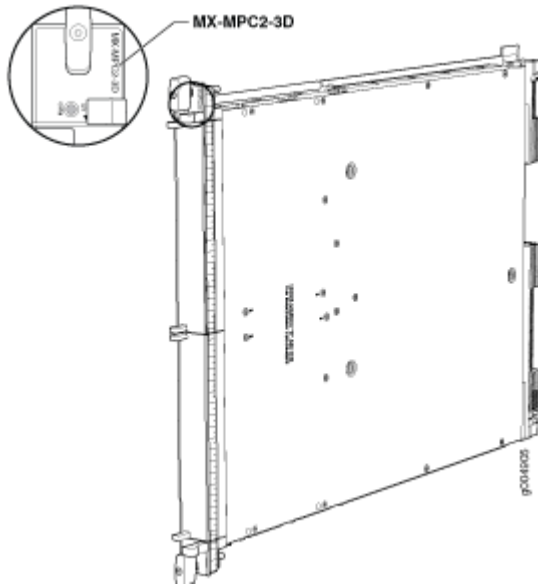

- Software release
- MX240, MX480, and MX960 routers : Junos OS Release 10.1 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

-
- Description
- Power requirement: 5.7 A @ 48 V (274 W)
 - Weight: 14 lb (6.4 kg)
 - Model number: MX-MPC2-3D
 - Name in the CLI: MPC Type 2 3D

-
- Hardware features
- Two slots for MICs labeled **PIC 0/1** and **PIC 2/3**
 - Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
-

- Software features
- See "[Protocols and Applications Supported on MPCs for MX Series Routers](#)" on page 451 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL LED**, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2E

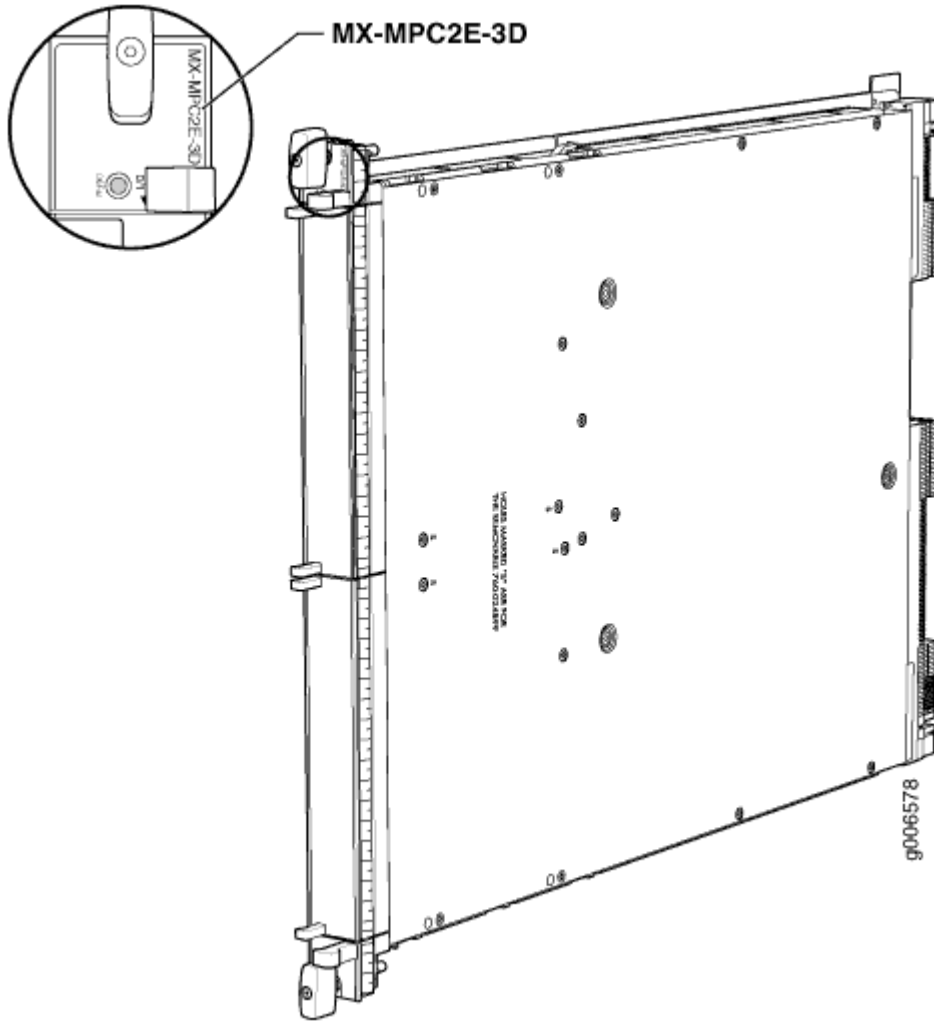

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 11.2R4 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 5.7 A @ 48 V (274 W)• Weight: 14 lb (6.4 kg)• Model number: MX-MPC2E-3D• Name in the CLI: MPCE Type 2 3D
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E" on page 483 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2 Q

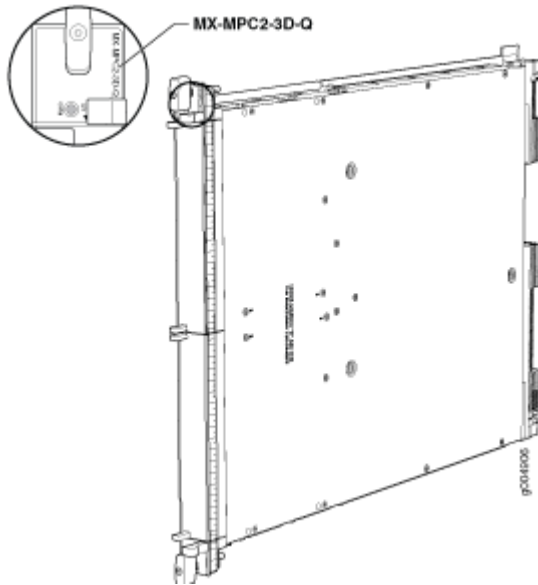

- Software release
- MX240, MX480, and MX960 routers : Junos OS Release 10.1 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

-
- Description
- Power requirement: 6.13 A @ 48 V (294 W)
 - Weight: 14 lb (6.4 kg)
 - Model number: MX-MPC2-3D-Q
 - Name in the CLI: MPC Type 2 3D Q

-
- Hardware features
- Two slots for MICs labeled **PIC 0/1** and **PIC 2/3**
 - Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
-

- Software features
- See "[Protocols and Applications Supported on MPCs for MX Series Routers](#)" on page 451 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL LED**, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2E Q

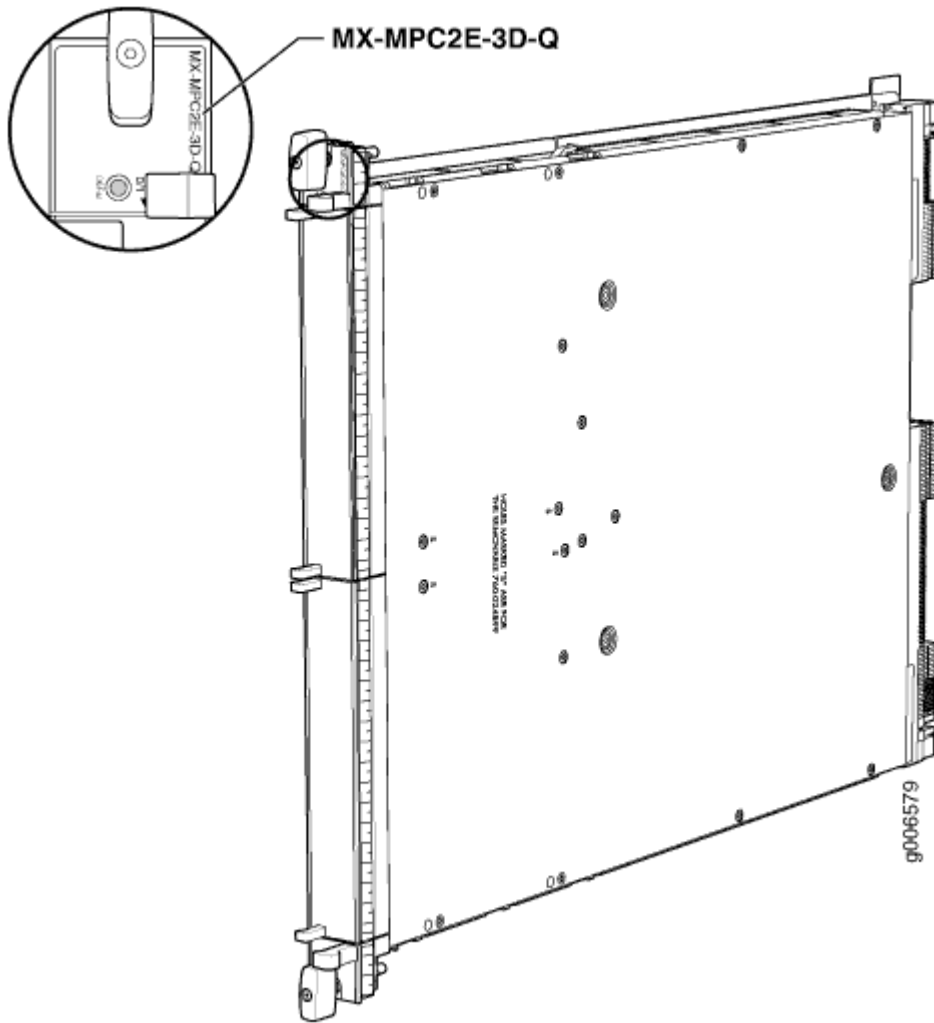

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 11.2R4 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 6.13 A @ 48 V (294 W)• Weight: 14 lb (6.4 kg)• Model number: MX-MPC2E-3D-Q• Name in the CLI: MPCE Type 2 3D Q
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E" on page 483 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2 EQ

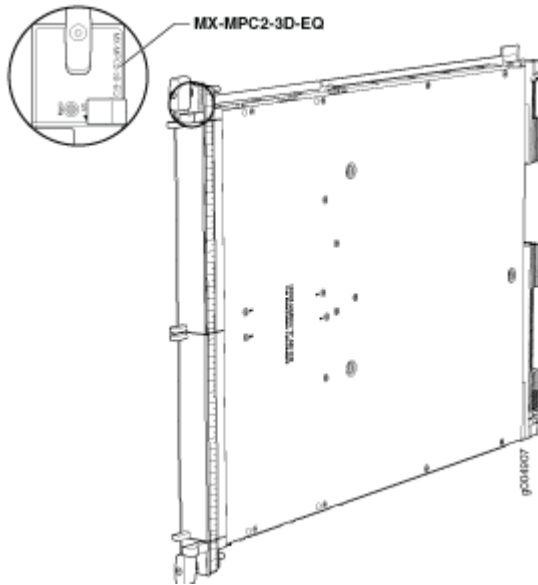

- Software release
- MX240, MX480, and MX960 routers : Junos OS Release 10.1 and later
 - MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

-
- Description
- Power requirement: 6.13 A @ 48 V (294 W)
 - Weight: 14 lb (6.4 kg)
 - Model number: MX-MPC2-3D-EQ
 - Name in the CLI: MPC Type 2 3D EQ

-
- Hardware features
- Two slots for MICs labeled **PIC 0/1** and **PIC 2/3**
 - Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
-

- Software features
- See "[Protocols and Applications Supported on MPCs for MX Series Routers](#)" on page 451 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL LED**, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2E EQ

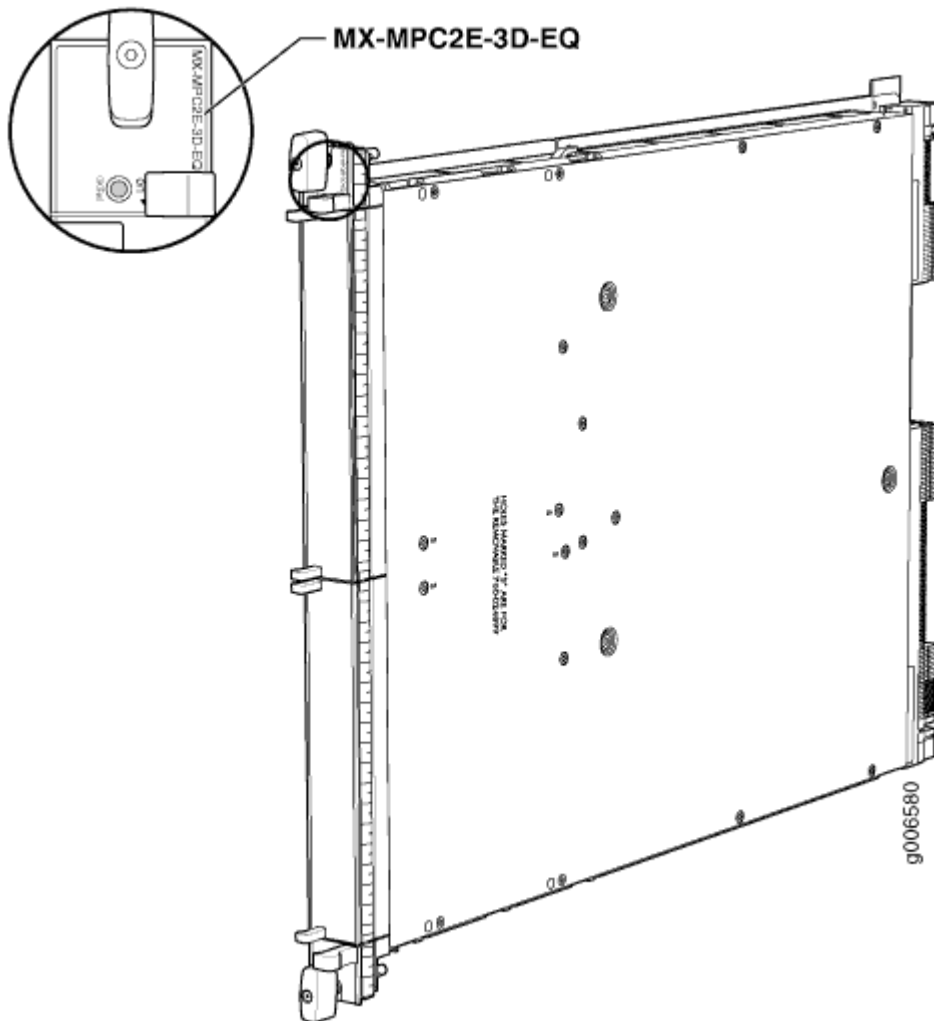

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 11.2R4 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 6.13 A @ 48 V (294 W)• Weight: 14 lb (6.4 kg)• Model number: MX-MPC2E-3D-EQ• Name in the CLI: MPCE Type 2 3D EQ
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E" on page 483 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2E P

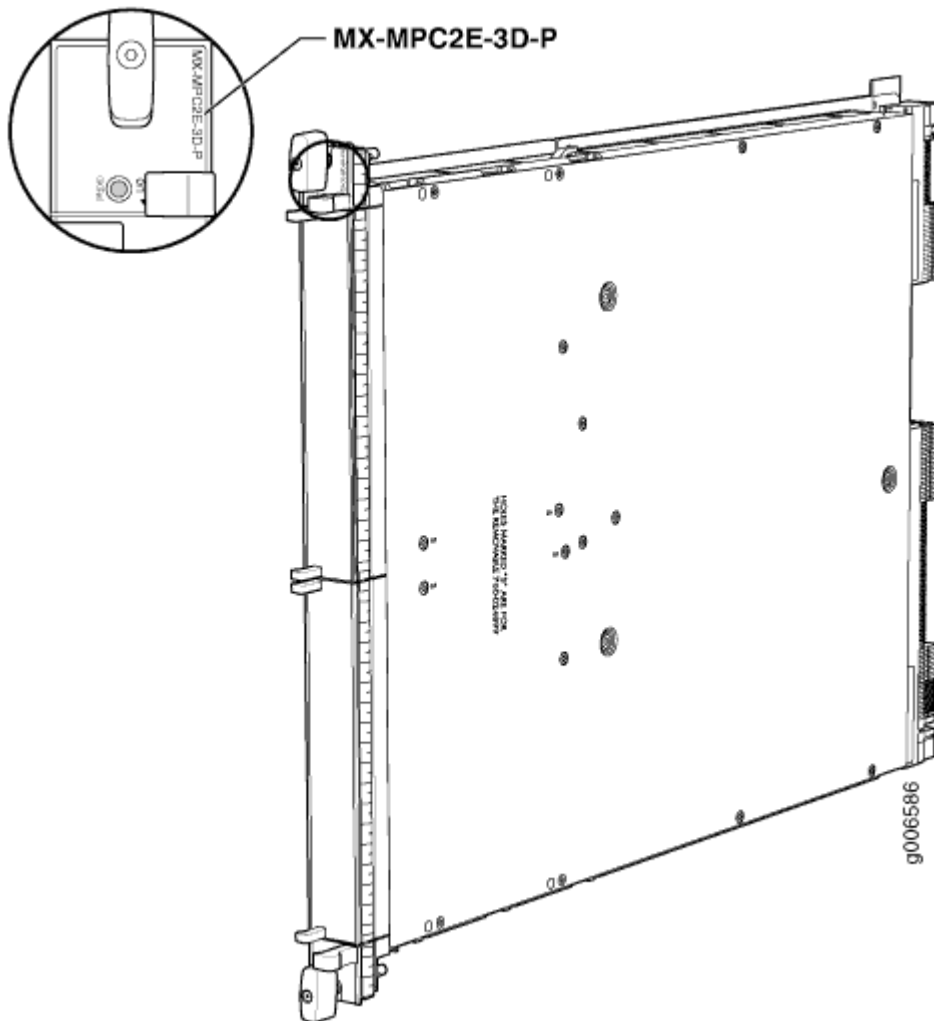

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 12.2 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.


Description	<ul style="list-style-type: none">• Power requirement: 6.13 A @ 48 V (294 W)• Weight: 14 lb (6.4 kg)• Model number: MX-MPC2E-3D-P• Name in the CLI: MPCE Type 2 3D P
Hardware features	<ul style="list-style-type: none">• Two slots for MICs labeled PIC 0/1 and PIC 2/3• Two Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.953 Gbps
Software features	<ul style="list-style-type: none">• See "Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E" on page 483 for information about the protocols and applications that this MPC supports.
LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Blinking green—MPC is transitioning online or offline.• Red—MPC has failed.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC2E NG

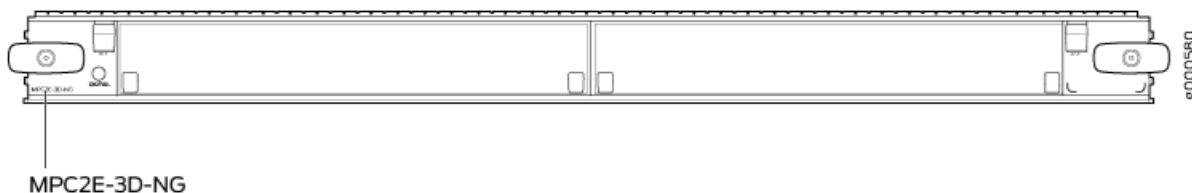

- Software release
- Junos OS releases 14.1R4, 14.2R3 and Junos Continuity, Junos OS release 15.1 and later.
 - Refer to [MIC/MPC Compatibility](#) for information about which MICs are supported on this MPC.
 - Refer to the JTAC Knowledgebase article <https://kb.juniper.net/KB21476> for recommended software releases.

- Description
- 80 Gbps capacity without hierarchical quality of service (HQoS)
 - Requires high-capacity fan trays and high-capacity filter trays
 - Weight: 15.96 lb (7.26 kg)
 - Model numbers: MPC2E-3D-NG
 - Name in the CLI: MPC2E NG PQ & Flex Q
 - Add-on license provides limited additional flexible queuing.

NOTE: MPC2E-3D-NG is not compatible with SCB, you must use either SCBE-MX or SCBE2-MX for the switch fabric interface.

- Hardware features
- Line-rate throughput of up to 80 Gbps
 - Supports WAN-PHY mode at 9.95 Gbps and LAN-PHY mode at 10.31 Gbps
 - Two slots for MICs
 - Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services.

NOTE: MPC2E-3D-NG is not compatible with SCB, you must use either SCBE-MX or SCBE2-MX for the switch fabric interface.

NOTE: MPC2E-3D-NG does not support MIC3-3D-10XGE-SFPP, MIC3-3D-1X100GE-CFP, MIC3-3D-1X100GE-CXP, and MIC3-3D-2X40GE-QSFPP.

NOTE: The non-HQOS MPC3E NG and MPC2E NG MPCs support MIC-3D-8CHOC3-4CHOC12 and MIC-3D-4CHOC3-2CHOC12 only with a limited queuing license.

-
- Software features
- Chained composite next hops
 - Layer 3 VPN localization
 - Detection of Layer 2 loops
 - Entropy label support in mixed mode
 - SNMP and CLI support for Routing Engine memory monitoring
 - Mixed-mode LAG support on core interfaces
 - Dynamic power management for MICs
 - Support for flexible-queuing
 - See [Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E](#) for information about the protocols and applications that this MPC supports.
-

Power requirement Maximum with highest-power MICs at 55° C: 9.88 A @ 48 V (474 W)

At different temperatures:

- 55° C: 474 W
- 40° C: 417 W
- 25° C: 400 W

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-


RELATED DOCUMENTATION

[MX Series MPC Overview](#)

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software](#)

MPC2E NG Q

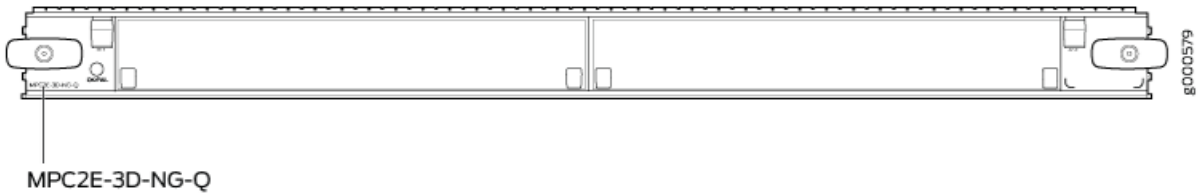

- Software release
- Junos OS releases 14.1R4, 14.2R3 and Junos Continuity, Junos OS release 15.1 and later.
 - Refer to [MIC/MPC Compatibility](#) for information about which MICs are supported on this MPC.
 - Refer to the JTAC Knowledgebase article <https://kb.juniper.net/KB21476> for recommended software releases.
-

- Description
- 80 Gbps capacity with hierarchical quality of service (HQoS)
 - Requires high-capacity fan trays and high capacity filter trays
 - Weight: 15.96 lb (7.26 kg)
 - Model number: MPC2E-3D-NG-Q
 - Name in the CLI: MPC2E NG HQoS
- NOTE:** MPC2E-3D-NG-Q is not compatible with SCB, you must use either SCBE-MX or SCBE2-MX for the switch fabric interface.
-

- Hardware features
- Line-rate throughput of up to 80 Gbps
 - Supports up to 512,000 queues per slot
 - Supports WAN-PHY mode at 9.95 Gbps and LAN-PHY mode at 10.31 Gbps
 - Two slots for MICs
 - Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services.
- NOTE:** The MPC2E-3D-NG-Q has only one lookup chip (LU).
- NOTE:** MPC2E-3D-NG-Q does not support MIC3-3D-10XGE-SFPP, MIC3-3D-1X100GE-CFP, MIC3-3D-1X100GE-CXP, and MIC3-3D-2X40GE-QSFPP.
-

- Software features
- Chained composite next hops
 - Layer 3 VPN localization
 - Detection of Layer 2 loops
 - Entropy label support in mixed mode
 - SNMP and CLI support for Routing Engine memory monitoring
 - BFD support for inline MLPPP/MLFR
 - Mixed Mode LAG support on core interfaces
 - Dynamic power management for MICs
 - See [Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E](#) for information about the protocols and applications that this MPC supports.

Power requirement Maximum with highest-power MICs at 55° C: 11.02 A @ 48 V (529 W)

At different temperatures:

- 55° C: 529 W
- 40° C: 460 W
- 25° C: 438 W

-
- LEDs **OK/FAIL** LED, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-


RELATED DOCUMENTATION

[MX Series MPC Overview](#)

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software](#)

MPC3E

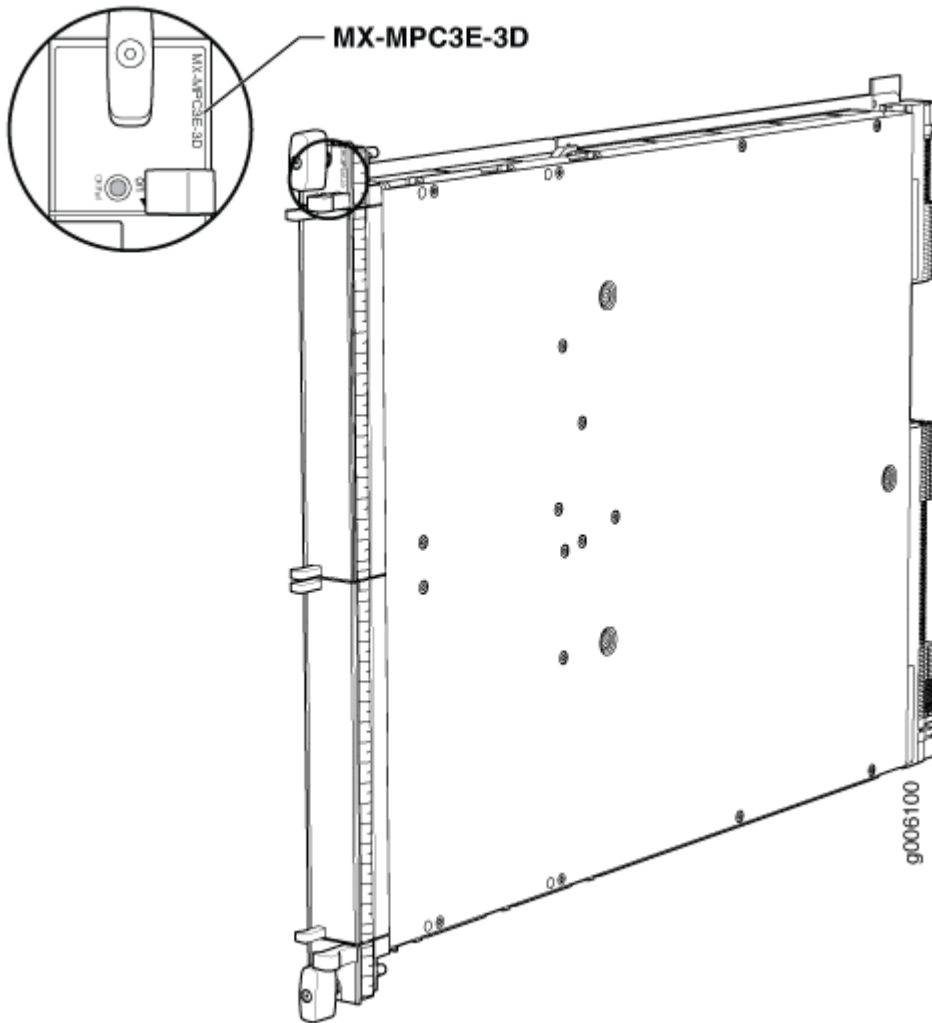

Software release

- MX240, MX480, and MX960 routers : Junos OS Release 12.1 and later
- MX2010 and MX2020 router: Junos OS Release 12.3 and later

For information on which MICs are supported on this MPC, ["MIC/MPC Compatibility"](#) on page 45.

- Description
- Power requirement: 10.83 A @ 48 V (440 W; plus 40 W for each of the two MICs)
 - Requires high-capacity fan trays
 - Weight: 14.94 lb (6.78 kg)
 - Model number: MX-MPC3E-3D
 - Name in the CLI: MPCE Type 3 3D
-

- Hardware features
- Two slots for MICs
 - Chipset for increased scaling for bandwidth, subscribers, and services
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
- NOTE:** To support fabric redundancy, the MPC3E requires the Enhanced MX Switch Control Board (SCBE).
-

- Software features
- See ["Protocols and Applications Supported by the MPC3E on MX Series Routers" on page 499](#) for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL** LED, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC3E-3D-NG

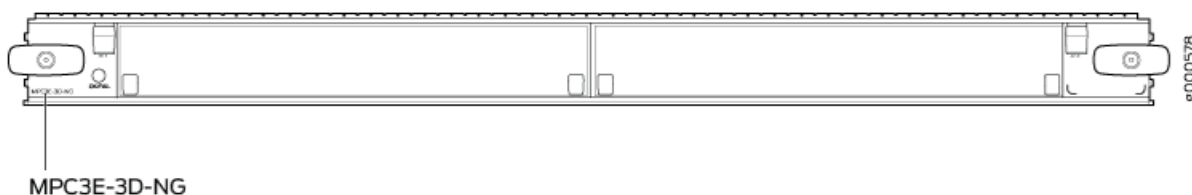

Software release	<ul style="list-style-type: none"> • Junos OS releases 14.1R4, 14.2R3 and Junos Continuity, Junos OS release 15.1 and later. • Refer to MIC/MPC Compatibility for information about which MICs are supported on this MPC. • Refer to the JTAC Knowledgebase article https://kb.juniper.net/KB21476 for recommended software releases.
<hr/>	
Description	<ul style="list-style-type: none"> • 130 Gbps capacity without hierarchical quality of service (HQoS) • Requires high-capacity fan trays and high-capacity filter trays • Weight: 15.96 lb (7.26 kg) • Model number: MPC3E-3D-NG • Name in the CLI: MPC3E NG PQ & Flex Q • Add-on license provides limited additional flexible queuing.

- Hardware features
- Line-rate throughput of up to 130 Gbps
 - Supports WAN-PHY mode at 9.95 Gbps and LAN-PHY mode at 10.31 Gbps
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - Two slots for MICs
 - Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services

NOTE: The non-HQOS MPC3E NG and MPC2E NG MPCs support MIC-3D-8CHOC3-4CHOC12 and MIC-3D-4CHOC3-2CHOC12 only with a limited queuing license.

NOTE: The MPC3E-3D-NG requires high-capacity power supplies, high-capacity fan trays, and enhanced switch control boards (SCBE, SCBE2, or SCBE3) on MX240, MX480, and MX960 routers.

-
- Software features
- Chained composite next hops
 - Layer 3 VPN localization
 - Detection of Layer 2 loops
 - Entropy label support in mixed mode
 - SNMP and CLI support for Routing Engine memory monitoring
 - Mixed Mode LAG support on core interfaces
 - Dynamic power management for MICs
 - Support for flexible-queuing
 - See [Protocols and Applications Supported by the MPC3E on MX Series Routers](#) for information about the protocols and applications that this MPC supports.
-

Power requirement Maximum with highest-power MICs at 55° C: 11.13 A @ 48 V (534 W)

At different temperatures:

- 55° C: 534 W
- 40° C: 485 W
- 25° C: 461 W

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

NOTE: On the MX960 router, FPC slot 0 and slot 11 are not NEBS compliant beyond 122°F (50°C) with MPC3E-3D-NG and MPC3E-3D-NG-Q. This is a cooling restriction.


RELATED DOCUMENTATION

[MX Series MPC Overview](#)

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software](#)

MPC3E-3D-NG-Q

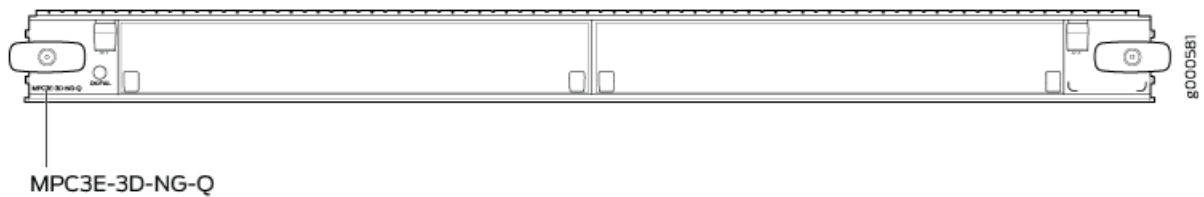

- Software release
- Junos OS releases 14.1R4, 14.2R3 and Junos Continuity, Junos OS release 15.1 and later.
 - Refer to [MIC/MPC Compatibility](#) for information about which MICs are supported on this MPC.
 - Refer to the JTAC Knowledgebase article <https://kb.juniper.net/KB21476> for recommended software releases.
-

- Description
- 130 Gbps capacity with hierarchical quality of service (HQoS)
 - Requires high-capacity fan trays and high-capacity filter trays
 - Weight: 15.96 lb (7.26 kg)
 - Model number: MPC3E-3D-NG-Q
 - Name in the CLI: MPC3E NG HQoS
- NOTE:** MPC3E-3D-NG-Q is not compatible with SCB, you must use either SCBE-MX or SCBE2-MX for the switch fabric interface.
-

- Hardware features
- Line-rate throughput of up to 130 Gbps
 - Supports up to 512,000 queues per slot
 - Supports WAN-PHY mode at 9.95 Gbps and LAN-PHY mode at 10.31 Gbps
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - Two slots for MICs
 - Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services
-

- Software features
- Chained composite next hops
 - Layer 3 VPN localization
 - Detection of Layer 2 loops
 - Entropy label support in mixed mode
 - SNMP and CLI support for Routing Engine memory monitoring
 - BFD support for inline MLPPP/MLFR
 - Mixed Mode LAG support on core interfaces
 - Dynamic power management for MICs
 - See [Protocols and Applications Supported by the MPC3E on MX Series Routers](#) for information about the protocols and applications that this MPC supports.

Power requirement Maximum with highest-power MICs at 55° C: 12.15 A @ 48 V (583 W)

At different temperatures:

- 55° C: 583 W
- 40° C: 532 W
- 25° C: 503 W

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

NOTE: On the MX960 router, FPC slot 0 and slot 11 are not NEBS compliant beyond 122°F (50°C) with MPC3E-3D-NG and MPC3E-3D-NG-Q. This is a cooling restriction.


RELATED DOCUMENTATION

[MX Series MPC Overview](#)

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software](#)

32x10GE MPC4E

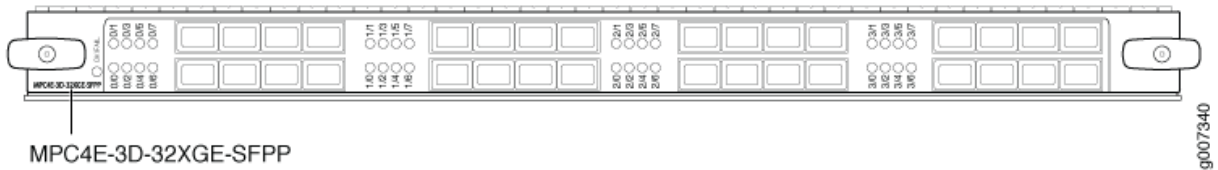

Software release

- Junos OS Release 12.3R2 and later

Description

- Fixed configuration MPC with thirty-two 10-Gigabit Ethernet ports
- Power requirement: 12.7 A @ 48 V (610 W)
- Weight: 19.4 lb (8.8 kg)
- Model number: MPC4E-3D-32XGE-SFPP

Hardware features

- Line-rate throughput of up to 260 Gbps
- WAN-PHY mode at 10 Gbps on a per-port basis
- Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
- Supported on MX2020, MX2010, MX960, MX480, and MX240 routers with both normal-capacity and high-capacity power supplies and fan trays.

NOTE: By default on MX480 routers, only 5 out of the 6 line-card slots can be populated with MPC4Es. By default on MX960 routers, only 10 out of the 11 line-card slots can be populated with MPC4Es. This is a power restriction of default operating mode which supports operation at 55°C ambient temperature. You can insert other line-cards in the remaining slots as long as the power budget is not exceeded. However, if ambient-temperature is configured to 25°C or 40°C, all the 6 slots of an MX480 can be populated with MPC4E, and all the 11 slots of an MX960 can be populated with MPC4E. For more information about power requirements, see *Power Requirements for an MX480 Router*, and *Power Requirements for an MX960 Router*.

Software features

- Optical diagnostics and related alarms
- Up to 260 Gbps of full-duplex traffic
- Intelligent oversubscription services
- Configurable LAN-PHY and WAN-PHY mode options per port
- Local loopback
- Configurable to interoperate with routers that use the 100-Gigabit Ethernet PIC (Type 4 PIC on Type 4 FPC)
- See "[Protocols and Applications Supported on the MPC4E for MX Series Routers](#)" on page 515 for information about the protocols and applications that this MPC supports.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: SFPP-10GE-ZR has a commercial temperature rating and is not NEBS compliant when plugged into the 32x10GE MPC4E with SFP+. If the ambient air temperature exceeds 50°C (122°F), Junos OS disables the transmitter, which takes the optical transceiver offline.

NOTE: SFPP-10G-DT-ZRC2 is not NEBS compliant when plugged into the MPC4E-3D-32XGE-SFPP MPC. If the ambient air temperature exceeds 50°C (122°F), Junos OS disables the transmitter, which takes the optical transceiver offline.

NOTE: On the MX960 router, FPC slot **0** and FPC slot **11** are not NEBS compliant beyond 40°C (104°F). This is a cooling restriction.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

Enable/disable LED, one bicolor per port:

- Green—Port is enabled.
- Red—Port has failed.
- Off—Port is disabled.

The enable/disable LEDs are arranged in four groups:

- **0/0** through **0/7**
- **1/0** through **1/7**
- **2/0** through **2/7**
- **3/0** through **3/7**


RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

Configuring MPC4E (MPC4E-3D-2CGE-8XGE) to Interoperate with 100-Gigabit Ethernet PICs on Type 4 FPC Using SA Multicast Mode

2x100GE + 8x10GE MPC4E

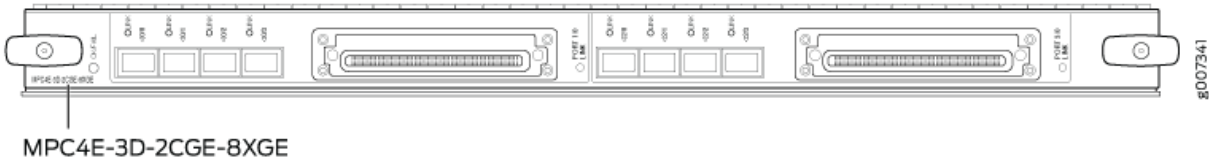

Software release • Junos OS Release 12.3R2 and later

Description • Fixed configuration MPC with two 100-Gigabit Ethernet ports and eight 10-Gigabit Ethernet ports

- Power requirement: 12.7 A @ 48 V (610 W)
- Weight: 19.4 lb (8.8 kg)
- Model number: MPC4E-3D-2CGE-8XGE
- Dimensions: Height = 1.25 in. (3.2 cm), Width = 17 in. (43.2 cm), Depth = 22 in. (55.9 cm)

- Hardware features
- Line-rate throughput of up to 260 Gbps
 - WAN-PHY mode at 10 Gbps on a per-port basis
 - Supported only on the MX960, MX480, and MX240 routers with high-capacity power supplies and high-capacity fan trays.
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - The ports are labeled as:
 - 10-Gigabit Ethernet ports: **0/0** through **0/3**
 - 100-Gigabit Ethernet ports: **PORT 1/0**
 - 10-Gigabit Ethernet ports: **2/0** through **2/3**
 - 100-Gigabit Ethernet ports: **PORT 3/0**

NOTE: On MX960 routers, all the MPC slots work with chassis temperature of up to 40°C (104°F). However, when the chassis temperature exceeds 40°C (104°F), the slots 0 and 11 do not work with MPC3E-3D-NG, MPC3E-3D-NG-Q, MPC4E, and MPC5E.

NOTE: By default on MX480 routers, only 5 out of the 6 line-card slots can be populated with MPC4Es. By default on MX960 routers, only 10 out of the 11 line-card slots can be populated with MPC4Es. This is a power restriction of default operating mode which supports operation at 55°C ambient temperature. You can insert other line-cards in the remaining slots as long as the power budget is not exceeded. However, if ambient-temperature is configured to 25°C or 40°C, all the 6 slots of an MX480 can be populated with MPC4E, and all the 11 slots of an MX960 can be populated with MPC4E. For more information about power requirements, see *Power Requirements for an MX480 Router*, and *Power Requirements for an MX960 Router*.

- Software features
- Optical diagnostics and related alarms
 - Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
 - Up to 260 Gbps of full-duplex traffic
 - Intelligent oversubscription services
 - Local loopback
 - Configurable to interoperate with routers that use the 100-Gigabit Ethernet PIC (Type 4 PIC on Type 4 FPC)
 - See "[Protocols and Applications Supported on the MPC4E for MX Series Routers](#)" on page 515 for information about the protocols and applications that this MPC supports.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: SFPP-10GE-ZR has a commercial temperature rating and is not NEBS compliant when plugged into the 2x100GE + 8x10GE MPC4E. If the ambient air temperature exceeds 50°C (122°F), Junos OS disables the transmitter, which takes the optical transceiver offline.

NOTE: SFPP-10G-DT-ZRC2 is not NEBS compliant when plugged into the MPC4E-3D-2CGE-8XGE MPC. If the ambient air temperature exceeds 50°C (122°F), Junos OS disables the transmitter, which takes the optical transceiver offline.

NOTE: CFP-100GBASE-LR4 and CFP-100GBASE-ZR are not NEBS compliant when plugged into the 2x100GE + 8x10GE MPC4E. If the ambient air temperature exceeds 50°C (122°F), the software disables the transmitter, which takes the optical transceiver offline.

NOTE: On the MX960 router, FPC slot **0** and FPC slot **11** are not NEBS compliant beyond 40°C (104°F). This is a cooling restriction.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

LINK LED, one tricolor per port:

- Green—Port is enabled.
- Red—Port has failed.
- Yellow—Port is disabled by configuration.
- Off—Port is disabled.


RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

Configuring MPC4E (MPC4E-3D-2CGE-8XGE) to Interoperate with 100-Gigabit Ethernet PICs on Type 4 FPC Using SA Multicast Mode

6x40GE + 24x10GE MPC5E

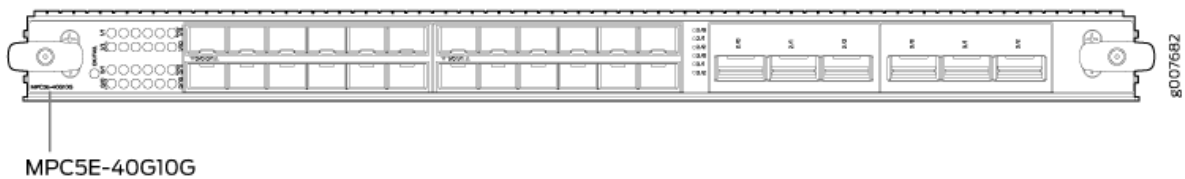

Software release

- Junos OS Release 13.3R2 and later

Description

- Fixed-port MPC with six 40-Gigabit Ethernet ports and twenty-four 10-Gigabit Ethernet ports
 - Weight: 21 lb (9.52 kg)
 - Model number: MPC5E-40G10G
 - Name in the CLI: MPC5E 3D 24XGE+6XLGE
-

- Hardware features
- Line-rate throughput of up to 240 Gbps
 - Supports one of the following port combinations:
 - Six 40-Gigabit Ethernet ports
 - Twenty-four 10-Gigabit Ethernet ports
 - Three 40-Gigabit Ethernet ports and twelve 10-Gigabit Ethernet ports
 - Supports up to 32,000 queues per-slot
 - LAN-PHY mode at 10.3125 Gbps on a per-port basis
 - WAN-PHY mode at 9.95328 Gbps on a per-port basis
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - The ports are labeled as:
 - 10-Gigabit Ethernet ports:
0/0 through **0/11**
1/0 through **1/11**
 - 40-Gigabit Ethernet ports:
2/0 through **2/2**
3/0 through **3/2**
 - The MPC5E supports the enhanced Switch Control Board (MX-SCBE) and MX-SCBE2 on MX240, MX480, and MX960 routers. The MPC5E does not support the legacy SCB (MX-SCB). The MPC5E supports the Switch Fabric Board (SFB) on MX2010 and MX2020 routers.
 - MPC5E does not interoperate with the existing DPCs, except the Multiservices DPC (MS-DPC).
- NOTE:** On MX960 routers, all the MPC slots work with chassis temperature of up to 40°C (104°F). However, when the chassis temperature exceeds 40°C (104°F), the slots **0** and **11** do not work with MPC3E-3D-NG, MPC3E-3D-NG-Q, MPC4E, and MPC5E.
-

- Software features
- Optical diagnostics and related alarms
 - Support for optical transport network (OTN) on 10-Gigabit Ethernet ports
 - Two packet-forwarding engines, PFE0 and PFE1. PFE0 hosts PIC0 and PIC2. PFE1 hosts PIC1 and PIC3.
 - Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
 - See "[Protocols and Applications Supported by the MPC5E for MX Series Routers](#)" on page 530 for information about the protocols and applications that this MPC supports.

NOTE: On MX240, MX480, and MX960 routers, MPC5E powers on only if the network-services mode on the router is configured to either **enhanced-ip** or **enhanced-ethernet**. On MX2010 and MX2020 routers, only **enhanced-ip** is supported.

NOTE: A maximum of two PICs can be powered on at any one time (PIC0 or PIC2, and PIC1 or PIC3). The other PICs must be powered off.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: QSFPP-40GE-LX4 is not NEBS compliant on the MX960 router in FPC slot 0 or FPC slot 11.

Power requirements

- Typical: 9.68 A @ 48 V (460 W)
- At different temperatures with default configuration:
 - 55° C: 558 W
 - 40° C: 496 W
 - 25° C: 469 W
- At different temperatures when flexible-queueing-mode CLI knob is configured under `set chassis fpc 1 flexible-queueing-mode`:
 - 55° C: 607 W
 - 40° C: 541 W
 - 25° C: 511 W

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

10-Gigabit Ethernet **LINK** LED, one green per port:

- Green—Link is up.
- Off—Link is down or disabled.

40-Gigabit Ethernet **LINK** LED, one bicolor per port:


- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down.

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

6x40GE + 24x10GE MPC5EQ

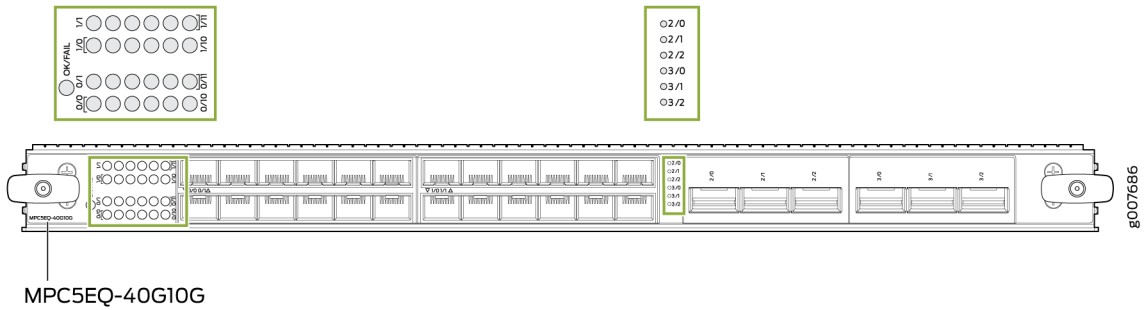

Software release • Junos OS Release 13.3R2 and later

Description • Fixed-configuration MPC with six 40-Gigabit Ethernet ports and twenty-four 10-Gigabit Ethernet ports

• Weight: 21 lb (9.52 kg)

• Model number: MPC5EQ-40G10G

• Name in the CLI: MPC5E 3D Q 24XGE+6XLGE

- Hardware features
- Line-rate throughput of up to 240 Gbps
 - Supports one of the following port combinations:
 - Six 40-Gigabit Ethernet ports
 - Twenty-four 10-Gigabit Ethernet ports
 - Three 40-Gigabit Ethernet ports and twelve 10-Gigabit Ethernet ports
 - Supports up to 1 million queues per-slot
 - LAN-PHY mode at 10.3125 Gbps on a per-port basis
 - WAN-PHY mode at 9.95328 Gbps on a per-port basis
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - The ports are labeled as:
 - 10-Gigabit Ethernet ports:
0/0 through **0/11**
1/0 through **1/11**
 - 40-Gigabit Ethernet ports:
2/0 through **2/2**
3/0 through **3/2**
 - The MPC5E supports the enhanced Switch Control Board (MX-SCBE) and MX-SCBE2 on MX240, MX480, and MX960 routers. The MPC5E does not support the legacy SCB (MX-SCB). The MPC5E supports the Switch Fabric Board (SFB) on MX2010 and MX2020 routers.
 - MPC5E does not interoperate with the existing DPCs, except the Multiservices DPC (MS-DPC).
- NOTE:** On MX960 routers, all the MPC slots work with chassis temperature of up to 40°C (104°F). However, when the chassis temperature exceeds 40°C (104°F), the slots **0** and **11** do not work with MPC3E-3D-NG, MPC3E-3D-NG-Q, MPC4E, and MPC5E.
-

- Software features
- Supports hierarchical QoS (HQoS)
 - Optical diagnostics and related alarms
 - Support for optical transport network (OTN) on 10-Gigabit Ethernet ports
 - Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
 - Intelligent oversubscription services
 - See "[Protocols and Applications Supported by the MPC5E for MX Series Routers](#)" on page 530 for information about the protocols and applications that this MPC supports.

NOTE: On MX240, MX480, and MX960 routers, MPC5E powers on only if the network-services mode on the router is configured to either **enhanced-ip** or **enhanced-ethernet**. On MX2010 and MX2020 routers, only **enhanced-ip** is supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: QSFPP-40GE-LX4 is not NEBS compliant on the MX960 router in FPC slot 0 or FPC slot 11.

Power requirements

- Typical: 9.68 A @ 48 V (460 W)
 - At different temperatures:
 - 55° C: 607 W
 - 40° C: 541 W
 - 25° C: 511 W
-

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

10-Gigabit Ethernet **LINK** LED, one green per port:

- Green—Link is up.
- Off—Link is down or disabled.

40-Gigabit Ethernet **LINK** LED, one bicolor per port:

- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down.


RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

10-Gigabit Ethernet OTN Options Configuration Overview

2x100GE + 4x10GE MPC5E



MPC5E-100G10G

Software release

- Junos OS Release 13.3R3 and later

- Description
- Fixed-configuration MPC with two 100-Gigabit Ethernet ports and four 10-Gigabit Ethernet ports
 - Weight: 21 lb (9.52 kg)
 - Model number: MPC5E-100G10G
 - Name in the CLI: MPC5E 3D 2CGE+4XGE
-

- Hardware features
- Line-rate throughput of up to 240 Gbps
 - Supports up to 32,000 queues per-slot
 - LAN-PHY mode at 10.3125 Gbps on a per-port basis
 - WAN-PHY mode at 9.95328 Gbps on a per-port basis
 - Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.
 - The ports are labeled as:
 - 10-Gigabit Ethernet ports: **0/0**, **0/1**, **2/0**, and **2/1**
 - 100-Gigabit Ethernet ports: **1/0** and **3/0**
 - The MPC5E supports the enhanced Switch Control Board (MX-SCBE) and MX-SCBE2 on MX2010, MX480, and MX960 routers. The MPC5E does not support the legacy SCB (MX-SCB). The MPC5E also supports the Switch Fabric Board (SFB) on MX2010 and MX2020 routers.
 - MPC5E does not interoperate with the existing DPCs, except the Multiservices DPC (MS-DPC).
- NOTE:** On MX960 routers, all the MPC slots work with chassis temperature of up to 40°C (104°F). However, when the chassis temperature exceeds 40°C (104°F), the slots **0** and **11** do not work with MPC3E-3D-NG, MPC3E-3D-NG-Q, MPC4E, and MPC5E.
-

- Software features
- Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
 - Optical diagnostics and related alarms
 - Intelligent oversubscription services
 - See "[Protocols and Applications Supported by the MPC5E for MX Series Routers](#)" on page 530 for information about the protocols and applications that this MPC supports.

NOTE: On MX240, MX480, and MX960 routers, MPC5E powers on only if the network-services mode on the router is configured to either **enhanced-ip** or **enhanced-ethernet**. On MX2010 and MX2020 routers, only **enhanced-ip** is supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE:

- CFP2-100G-ER4-D is not NEBS compliant on the MX960 router in FPC slot **0** or FPC slot **11**.
- CFP2-DCO-T-WDM-1 is not NEBS compliant on the MX960 router or the MX2020 router in FPC slot **0** or FPC slot **11**. Slots **0** and **11** can only work with an ambient temperature of up to 40° C.

-
- Power requirements
- Typical: 10.52 A @ 48 V (505 W)
 - At different temperatures:
 - 55° C: 607 W
 - 40° C: 541 W
 - 25° C: 511 W
-

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

10-Gigabit Ethernet **LINK LED**, one bicolor per port:

- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down or disabled.

100-Gigabit Ethernet **LINK LED**, one bicolor per port:

- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down.

RELATED DOCUMENTATION


[MX Series MPC Overview | 15](#)

MPCs Supported by MX Series Routers

10-Gigabit Ethernet OTN Options Configuration Overview

100-Gigabit Ethernet OTN Options Configuration Overview

2x100GE + 4x10GE MPC5EQ

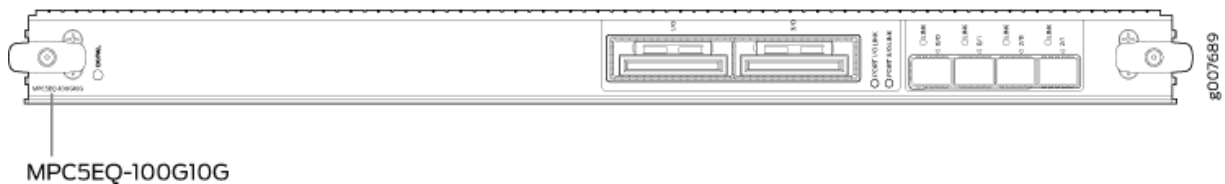

Software release	<ul style="list-style-type: none">• Junos OS Release 13.3R3 and later
------------------	---

Description	<ul style="list-style-type: none">• Fixed-configuration MPC with two 100-Gigabit Ethernet ports and four 10-Gigabit Ethernet ports• Weight: 21 lb (9.52 kg)• Model number: MPC5EQ-100G10G• Name in the CLI: MPC5E 3D Q 2CGE+4XGE
-------------	---

Hardware features	<ul style="list-style-type: none">• Line rate throughput of up to 240 Gbps• Supports up to 1 million queues per-slot• LAN-PHY mode at 10.3125 Gbps on a per-port basis• WAN-PHY mode at 9.95328 Gbps on a per-port basis• Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.• The ports are labeled as:<ul style="list-style-type: none">• 10-Gigabit Ethernet ports: 0/0, 0/1, 2/0, and 2/1• 100-Gigabit Ethernet ports: 1/0 and 3/0• The MPC5E supports the enhanced Switch Control Board (MX-SCBE) and MX-SCBE2 on MX2010, MX480, and MX960 routers. The MPC5E does not support the legacy SCB (MX-SCB). The MPC5E supports the Switch Fabric Board (SFB) on MX2010 and MX2020 routers.• MPC5E does not interoperate with the existing DPCs, except the Multiservices DPC (MS-DPC) <p>NOTE: On MX960 routers, all the MPC slots work with chassis temperature of up to 40°C (104°F). However, when the chassis temperature exceeds 40°C (104°F), the slots 0 and 11 do not work with MPC3E-3D-NG, MPC3E-3D-NG-Q, MPC4E, and MPC5E.</p>
-------------------	---

Software features

- Supports hierarchical QoS (HQoS)
- Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
- Optical diagnostics and related alarms
- Intelligent oversubscription services
- See "[Protocols and Applications Supported by the MPC5E for MX Series Routers](#)" on page 530 for information about the protocols and applications that this MPC supports.

NOTE: On MX240, MX480, and MX960 routers, MPC5E powers on only if the network-services mode on the router is configured to either **enhanced-ip** or **enhanced-ethernet**. On MX2010 and MX2020 routers, only **enhanced-ip** is supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/html/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE:

- CFP2-100G-ER4-D is not NEBS compliant on the MX960 router in FPC slot **0** or FPC slot **11**.
- CFP2-DCO-T-WDM-1 is not NEBS compliant on the MX960 router or the MX2020 router in FPC slot **0** or FPC slot **11**. Slots **0** and **11** can only work with an ambient temperature of up to 40° C.

Power requirements

- Typical: 10.52 A @ 48 V (505 W)
- At different temperatures:
 - 55° C: 607 W
 - 40° C: 541 W
 - 25° C: 511 W

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Blinking green—MPC is transitioning online or offline.
- Red—MPC has failed.

10-Gigabit Ethernet **LINK** LED, one bicolor per port:

- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down or disabled.

100-Gigabit Ethernet **LINK** LED, one bicolor per port:

- Green—Link is up.
- Yellow—Link is disabled.
- Off—Link is down.

RELATED DOCUMENTATION


[MX Series MPC Overview | 15](#)

MPCs Supported by MX Series Routers

10-Gigabit Ethernet OTN Options Configuration Overview

100-Gigabit Ethernet OTN Options Configuration Overview

MPC6E

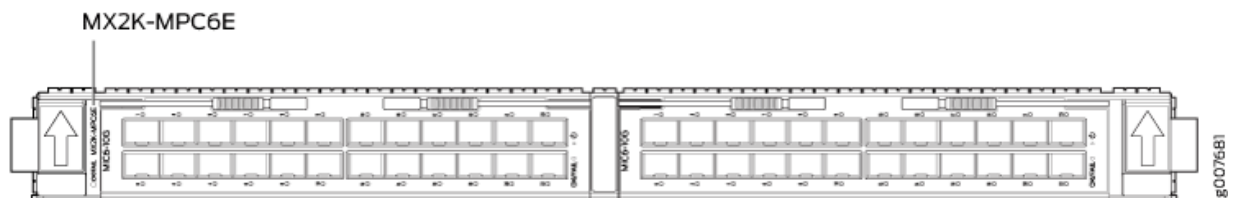

Software release

- Junos OS Release 13.3R2 and later

For information about which MICs are supported on this MPC, "[MIC/MPC Compatibility](#)" on page 45.

Description

- Two slots for MICs
- Weight: 27.4 lb (12.43 kg) (net weight without blank panels)
- Model number: MX2K-MPC6E
- Name in the CLI: MPC6E 3D

Hardware features

- Two slots for MICs
- Line-rate throughput of up to 480 Gbps
- Field-removable septum, to accommodate future full-height MICs
- Supports maximum transmission unit (MTU) size of 9,192 bytes for host bound packets. For Junos OS 16.1R1 and later releases, the MTU size supported is 9,500 bytes.

Maximum Power Requirements

Power requirement: 20.9 A @ 52 V (880 W; plus 104 W for each MIC)

MX2K-MPC6E:

- Typical: 648 W
 - 880 W at 55° C
 - 834 W at 40° C
 - 824 W at 25° C
-

- Software features
- Optical diagnostics and related alarms
 - Configurable LAN-PHY and WAN-PHY mode options per 10-Gigabit Ethernet port
 - Two Packet Forwarding Engines for each MIC slot
 - Intelligent oversubscription services
 - See "[Protocols and Applications Supported by the MPC6E for MX2000 Routers](#)" on page 543 for information about the protocols and applications that this MPC supports.
-


- LEDs
- OK/FAIL** LED, one bicolor:
- Steady green—MPC is functioning normally.
 - Blinking green—MPC is transitioning online or offline.
 - Red—MPC has failed.
- LINK** LED, one bicolor per port:
- Green—Link is up.
 - Yellow—Link is disabled.
 - Off—Link is down.
-

RELATED DOCUMENTATION

[MX Series MPC Overview](#) | 15

[MPCs Supported by MX Series Routers](#) | 16

MPC7E-MRATE

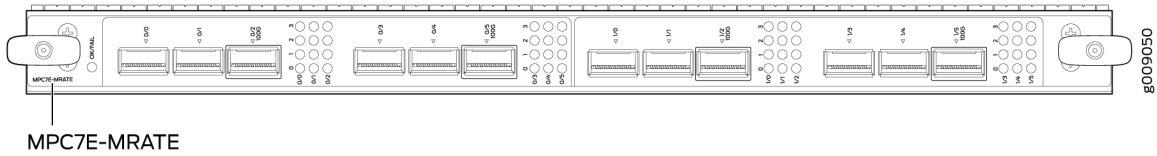

Software release	<ul style="list-style-type: none"> • Junos OS Release 15.1F4 with Junos Continuity. • Junos OS Release 15.1F6 and later. • Junos OS release 16.1R1 and later.
<hr/>	
Description	<ul style="list-style-type: none"> • Fixed-configuration MPC with 10-Gbps, 40-Gbps, and 100-Gbps port speeds • Weight: 15.7 lb (7.12 kg) • Model number: MPC7E-MRATE • Name in the CLI: MPC7E-MRATE
<hr/>	

Hardware features

- Line-rate throughput of up to 480 Gbps on MX240, MX480, and MX960 routers.
- Line-rate throughput of up to 400 Gbps on MX2000 routers with SFB, and up to 430 Gbps on MX2000 routers with SFB2.
- Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services
- Twelve Gigabit Ethernet ports that can be configured as 40-Gigabit Ethernet port or as four 10-Gigabit Ethernet ports using a breakout cable. The ports support quad small-form factor pluggable plus (QSFP+) transceivers. The 40Gbps or 100Gbps ports configured to run at 10Gbps speed are shown in the CLI as follows:

```
show interfaces terse
```

Interface	Admin	Link	Proto	Local	Remote
xe-10/0/0:0	up	down			
xe-10/0/0:1	up	down			
xe-10/0/0:2	up	down			
xe-10/0/0:3	up	down			

- Four out of the twelve ports can be configured as 100-Gigabit Ethernet ports. Port numbers **0/2, 0/5, 1/2** and **1/5** are the four 100-Gigabit Ethernet ports.
 - You can configure different combination of port speeds as long as the aggregate capacity per group of six ports labeled **0/0** through **0/5** does not exceed 240 Gbps. Similarly, aggregate capacity per group of the other six ports labeled **1/0** through **1/5** should not exceed 240 Gbps.
 - Requires high-capacity power supplies, high-capacity fan trays, and SCBE2 or SCBE3 switch control boards on MX240, MX480, and MX960 routers.
 - Requires an adapter card to be housed in MX2000 routers.
 - The ports are labeled as (with the MPC orientation as shown in the above figure):
 - 10-Gigabit Ethernet or 40-Gigabit Ethernet ports:
0/0, 0/1, 0/2 100G, 0/3, 0/4, 0/5 100G, 1/0, 1/1, 1/2 100G, 1/3, 1/4, and 1/5 100G
 - 100-Gigabit Ethernet ports:
0/2 100G, 0/5 100G, 1/2 100G and 1/5 100G
-

NOTE: Only ports marked **100G** support 100-Gigabit Ethernet speed using QSFP28 transceivers.

- Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9,500 bytes for host bound packets.

NOTE: On MX960 routers, all the MPC slots can be occupied by MPC7E MRATE line cards at an ambient temperature of up to 40° C and at any altitude. All the MPC slots can be occupied by an MPC7E MRATE line card at temperatures of up to 55° C and at sea level. At an ambient temperature of 55° C and above, and at an altitude above sea level, slot **11** cannot host MPC7E MRATE line cards.

Software features

- Supports rate selectability at the port level.
- By default, the ports are configured as 10-Gigabit Ethernet ports.
- Optical diagnostics and related alarms
- See [Protocols and Applications Supported by the MPC7E for MX Series Routers](#) for information about the protocols and applications that the MPC7E supports.

NOTE: On MX240, MX480, and MX960 routers, the MPC7E powers on only if the network-services mode on the router is configured as either **enhanced-ip** or **enhanced-ethernet**. On MX2000 router no additional configuration is required as by default the router operates in **enhanced-ip** mode.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

Power requirements

- At different temperatures:

55° C: 545 W

40° C: 465 W

25° C: 440 W


- LEDs
- OK/FAIL LED**, one bicolor:
- Steady green—MPC is functioning normally.
 - Yellow—MPC has failed.
- LINK LED**, one green per port (4 per QSFP+ cage):
- Steady green—Link is up.
 - Off—Link is down or disabled.

RELATED DOCUMENTATION

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software User Guide \(Junos OS Release 14.1R4 and Later Releases\)](#)

MPC7E-10G



MPC7E-10G

- Software release
- Junos OS Release 15.1F5 with Junos Continuity
 - Junos OS release 16.1R1 and later

- Description
- Fixed-configuration MPC with forty 10-Gbps ports
 - Weight: 17 lb (7.7 kg)
 - Model number: MPC7E-10G
 - Name in the CLI: MPC7E 3D 40XGE

- Hardware features
- Line-rate throughput of up to 400 Gbps on MX240, MX480, and MX960 routers.
 - Line-rate throughput of up to 400 Gbps on MX2000 routers.
 - Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services.
 - Forty 10-Gigabit Ethernet ports. The ports support SFP+ transceivers.
 - Requires high-capacity power supplies, high-capacity fan trays, and SCBE2 or SCBE3 switch control boards on MX240, MX480, and MX960 routers.
 - Requires an adapter card to be housed in MX2000 routers.
 - Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9,500 bytes for host bound packets.
 - The ports are labeled as (with the MPC orientation as shown in the figure):
 - **0/0** through **0/9**
 - **0/10** through **0/19**
 - **1/0** through **1/9**
 - **1/10** through **1/19**

-
- Software features
- Supports MACsec using the following encryption algorithms: gcm-aes-128, gcm-aes-xpn-128, gcm-aes-256, and gcm-aes-xpn-256.
 - Supports [Hyper mode](#) to speed up packet processing.
 - Supports [Flexible queuing](#) using an add-on license to support 32,000 queues per line card, including queues on both ingress and egress interfaces. You can use an additional license to support up to 512,000 queues.
 - Optical diagnostics and related alarms
 - See [Protocols and Applications Supported by the MPC7E for MX Series Routers](#) for information about the protocols and applications that MPC7Es support.

NOTE: On MX240, MX480, and MX960 routers, MPC7E powers on only if the network-services mode on the router is configured as either **enhanced-ip** or **enhanced-ethernet**. On MX2000 routers, no additional configuration is required because by default the router operates in **enhanced-ip** mode.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- 10GBASE-ZR (model number: SFPP-10G-ZR-OTN-XT)

NOTE: MPC7E-10G does not support OTN rates.

- 10GBASE-ZR (model number: SFPP-10G-DT-ZRC2)

NOTE:

- Supported from Junos OS release 16.1R1 and later.
- Supports 40° C ambient temperature operation at any altitude, and 55° C ambient temperature operation at sea level.

Power requirements

- Typical: 405 W
- At different temperatures:

55° C: 500 W

40° C: 465 W

25° C: 430 W

NOTE: On MX960 routers, all the MPC slots can be occupied by MPC7E-10G at an ambient temperature of up to 40° C and at any altitude. All the MPC slots can be occupied by MPC7E-10G at temperatures of up to 55° C and at sea level. At an ambient temperature of 55° C and above, and at an altitude above sea level, slot **11** cannot host MPC7E-10G.

LEDs

OK/FAIL LED, one bicolor:

- Steady green—MPC is functioning normally.
- Yellow—MPC has failed.

Link LED, one green per port:

- Steady green—Link is up.
- Off—Link is down or disabled.


RELATED DOCUMENTATION

[MX Series MPC Overview](#)

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software User Guide \(Junos OS Release 14.1R4 and Later Releases\)](#)

MPC8E

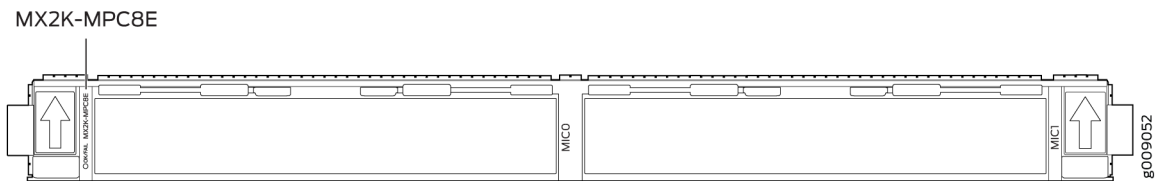

- Software release
- Junos OS Release 15.1F5 with Junos Continuity
 - Junos OS release 16.1R1 and later

- Description
- Weight: 31.4 lb (14.24 kg) (net weight without blank panels)
 - Model number: MX2K-MPC8E
 - Name in the CLI: MPC8E 3D

Hardware features

- Line-rate throughput of up to 960 Gbps on the MX2000 routers.
- Line-rate throughput of up to 1600 Gbps (1.6 Tbps) on the MX2000 routers with software upgrade.

NOTE: Starting from Junos OS Release 16.1R1, you can upgrade MPC8E to provide an increased bandwidth of 1600 Gbps (1.6 Tbps) by using an add-on license. After you perform the upgrade, MPC8E provides a bandwidth of 1.6 Tbps, which is equivalent to the bandwidth of "MPC9E" on page 213. However, the MPC continues to be identified as MPC8E.

- Four Packet Forwarding Engines, each providing a maximum bandwidth of 240 Gbps in normal mode and 400 Gbps in 1.6Tbps upgraded mode. A license is required to operate in 1.6 Tbps upgraded mode.
- Supports two MICs. For information about which MICs are supported on this MPC, see [MIC/MPC Compatibility](#).
- Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services.
- Supports the Switch Fabric Boards SFB and SFB2. When MPC8E is used with SFB, the line-rate throughput is limited to 800 Gbps.
- Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9,500 bytes for host bound packets.

Software features

- [Dynamic power management](#) for effective utilization of available power.
- [Inline flow monitoring](#) for higher scalability and performance.
- [Flexible queuing](#) using an add-on license to support 32,000 queues per line card, including queues on both ingress and egress interfaces. You can use an additional license to support up to 512,000 queues per slot or 1,000,000 queues per slot.
- [Hyper mode](#) to speed up packet processing.
- Optical diagnostics and related alarms.

For more information about features supported on MPC8E, see [Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers](#).

Power requirements (without MICs)	<p>Normal mode with line-rate throughput of 960 Gbps:</p> <ul style="list-style-type: none">• Typical: 688 W• At different temperatures:<ul style="list-style-type: none">55° C: 805 W40° C: 720 W25° C: 690 W <p>Upgrade mode with line-rate throughput of 1.6 Tbps:</p> <ul style="list-style-type: none">• Typical: 838 W• At different temperatures:<ul style="list-style-type: none">55° C: 1018 W40° C: 870 W25° C: 840 W
--------------------------------------	---

LEDs	<p>OK/FAIL LED, one bicolor:</p> <ul style="list-style-type: none">• Steady green—MPC is functioning normally.• Yellow—MPC has failed.
------	--


RELATED DOCUMENTATION

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software User Guide \(Junos OS Release 14.1R4 and Later Releases\)](#)

Port Speed for Routing Devices

MPC9E

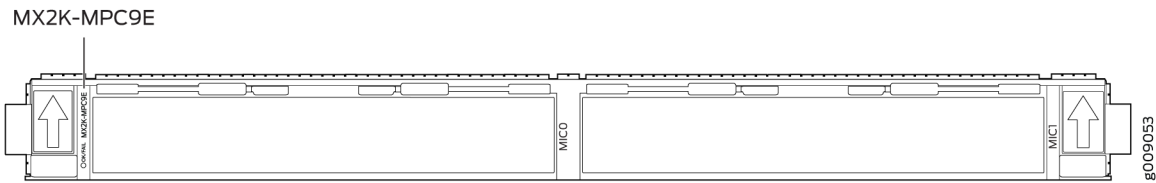

Software release	<ul style="list-style-type: none"> • Junos OS Release 15.1F5 with Junos Continuity • Junos OS release 16.1R1 and later
Description	<ul style="list-style-type: none"> • Weight: 31.4 lb (14.24 kg) (net weight without blank panels) • Model number: MX2K-MPC9E • Name in the CLI: MPC9E 3D
Hardware features	<ul style="list-style-type: none"> • Line-rate throughput of up to 1600 Gbps (1.6 Tbps) on MX2000 routers. • Four Packet Forwarding Engines, each providing a maximum bandwidth of 400 Gbps. • Supports two MICs. For information about which MICs are supported on this MPC, see MIC/MPC Compatibility. • Junos Trio chipsets for increased scaling for bandwidth, subscribers, and services • Supports the Switch Fabric Boards SFB and SFB2. When MPC9E is used with SFB, the line-rate throughput is limited to 800 Gbps. • Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9,500 bytes for host bound packets.

- Software features
- [Understanding How Dynamic Power Management Enables Better Utilization of Power](#) for effective utilization of available power.
 - *Inline Active Flow Monitoring* for higher scalability and performance.
 - *Flexible Queuing Mode* using an add-on license to support 32,000 queues per line card, including queues on both ingress and egress interfaces. You can use an additional license to support up to 512,000 queues per slot or 1,000,000 queues per slot.
 - *Hyper Mode* to speed up packet processing.
 - Optical diagnostics and related alarms.

For more information about features supported on MPC9E, see [Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers](#).

-
- Power requirements
(without MICs)
- Typical: 838 W
 - At different temperatures:
 - 55° C: 1018 W
 - 40° C: 870 W
 - 25° C: 840 W

-
- LEDs
- OK/FAIL** LED, one bicolor:
- Steady green—MPC is functioning normally.
 - Yellow—MPC has failed.
-


RELATED DOCUMENTATION

[MPCs Supported by MX Series Routers](#)

[Junos Continuity Software User Guide \(Junos OS Release 14.1R4 and Later Releases\)](#)

Port Speed for Routing Devices

MPC10E-10C-MRATE

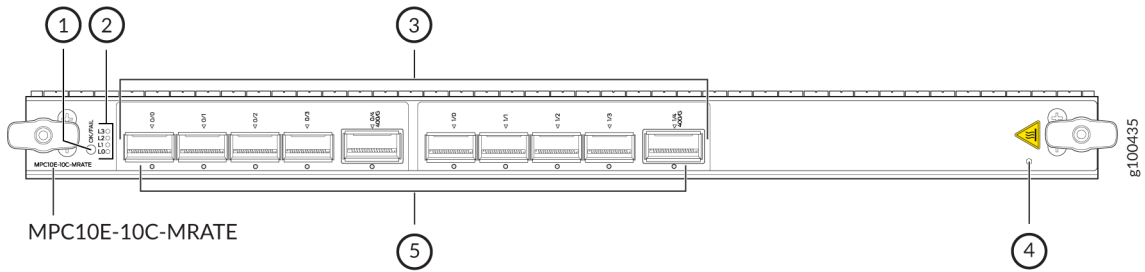

1– OK/FAIL LED	4– Physical Presence button
2– Lane LEDs	5– Port LEDs
3– Network ports	

Software release Junos OS Release 19.2R1 and later

NOTE: It is not possible to purchase a license that will enable you to upgrade from the MPC10E-10C-MRATE to the MPC10E-15C-MRATE.

- Description
- Weight: 19.75 lb (9.0 kg)
 - Model number: MPC10E-10C-MRATE
 - Name in the CLI: MPC10E 3D MRATE-10xQSFP

Hardware features

- Fixed-configuration MPC with 10-Gbps, 40-Gbps, 100-Gbps, and 400-Gbps port speeds.
- Line-rate throughput of up to 1.0 Tbps on MX240, MX480, and MX960 5G Universal Routing Platforms when installed with an enhanced midplane.

NOTE: In the CLI, when you run the `show chassis hardware` command, the midplane description may say Enhanced <platform> Backplane.

- Line-rate throughput of up to 800 Gbps on MX240, MX480, and MX960 5G Universal Routing Platforms when installed with a standard midplane.

NOTE: In the CLI when you run the `show chassis hardware` command, the midplane description may say <platform> Backplane. When the MPC10E-10C-MRATE is installed with the standard midplane to achieve maximum line-rate performance, the MPC's fabric redundancy mode must be configured in increased bandwidth mode.

- Contains the following port types:
 - QSFP28 ports—Port numbers 0/0 through 0/3, and 1/0 through 1/3 (10-Gbps, 40-Gbps, and 100-Gbps port speeds supported).
 - QSFP56-DD ports—Port numbers 0/4, and 1/4 (10-Gbps, 40-Gbps, 100-Gbps, and 400-Gbps port speeds supported).
 - The Processor Mezzanine Board (PMB) consists of a 1.6-GHz Intel Broadwell 8-core CPU, 100-GB SATA SSD, and two 16-GB ECC DDR4 DRAM modules.
 - Two Packet Forwarding Engines, each providing a maximum bandwidth of 500 Gbps.
 - Juniper Penta silicon for increased scaling, bandwidth, subscribers, and services.
 - Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9500 bytes for host-bound packets.
 - To achieve maximum performance, the following number of SCBE3-MX Switch Control Boards (SCBs) must be installed in the system:
 - MX960—3 SCBE3-MX
 - MX240 and MX480—2 SCBE3-MX
 - Requires high-capacity power supplies and high-capacity fan trays used in MX Series routers.
 - On MX960 routers, the MPC10E-10C-MRATE is not supported in the line-card slots numbered 10 and 11.
-

NOTE: When operating the MPC10E-10C-MRATE in ambient temperatures above the maximum normal operating temperature of 104° F (40° C), you may see a decrease in performance. This situation is normal, and the card is operating as designed. If a decrease in performance does occur, a yellow warning appears on the system. The decrease in performance is not a permanent situation. This may occur during NEBS operating environmental conditions.

-
- Software features
- Media Access Control Security is supported. See *Understanding Media Access Control Security (MACsec)*
 - Security Support:
 - *Secure boot* (see [Secure Boot](#))

For more information about features supported on MPC10E, see "[Protocols and Applications Supported by the MPC10E](#)" on page 615.

-
- Power requirements
- The power numbers are measured using the following configuration:
- IPv4 forwarding with 200-bytes packet size.
 - Line-rate traffic on all ports for 1.0 Tbps aggregate bandwidth.
 - All 10 ports are configured for 100-Gigabit Ethernet, with QSFP28 LR4 transceivers installed on all ports.
- At different temperatures:
- 131° F (55° C): 620 W
- NOTE:** To operate the MPC10E-10C-MRATE in ambient temperatures of 104° F (40° C) to 131° F (55° C), the MPC10E-10C-MRATE must be running on Junos OS Release 19.4R1 or later.
- 104° F (40° C): 590 W
 - 77° F (25° C): 545 W
-

LEDs

OK/FAIL LED, one bicolor:

- Green—MPC is functioning normally.
- Red—MPC has failed.

Port LED:

- Off—Port link is down with loss of signal.
- Green—Port link is up with no alarms or failures.
- Amber—Port link is down with alarms. Or the port has been administratively disabled through the CLI.
- Red—A transceiver on the port is experiencing a fault.

Lane LED:

There are four Lane LEDs, which are shared by the network ports. The lane LEDs work with the Junos OS software to determine which port the Lane LEDs are displaying the status for.

The Lane LEDs are used for the following configurations:

- When a network port is configured for 4 x 10-Gigabit Ethernet channelized interfaces with a breakout cable.
- When a network port is configured for 4 x 25-Gigabit Ethernet channelized interfaces with a breakout cable.

See *MPC and MIC Lane LED Scheme Overview* for more details.

Cables and connectors

You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at [MX Series Supported Transceivers](#).

Starting in Junos OS Release 19.3R1, the MPC10E-10C-MRATE supports 25-Gbps port speeds when the network port is configured for 4 x 25-Gigabit Ethernet channelized interfaces with a breakout. This configuration is only supported up to an ambient temperature of 104° F (40° C).


When operating the MPC10E-10C-MRATE in ambient temperatures above 104° F (40° C), only the following transceivers are supported:

- QSFP-100G-CWDM4-ET
- QSFP-100G-LR4-ET

The QDD-400G-LR8 transceiver is supported at certain ambient temperature and altitude combinations. The following table lists the supported combinations.

Altitude (Feet Above Sea Level)	Maximum Ambient Temperature
6000	36° C (96.8° F)
5000	37° C (98.6° F)
4000	38° C (100.4° F)
3000	39° C (102.2° F)
2000 and below	40° C (104° F)

MPC10E-15C-MRATE

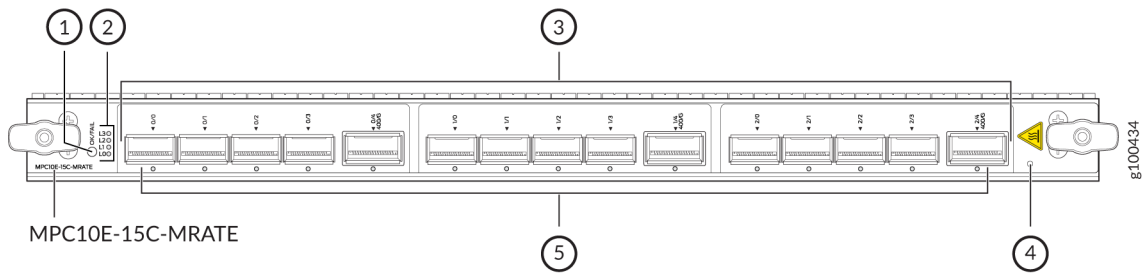

1– OK/FAIL LED

2– Lane LEDs

3– Network ports

4– Physical Presence button

5– Port LEDs

Software release Junos OS Release 19.1R1 and later

NOTE: It is not possible to purchase a license that will enable you to upgrade from the MPC10E-15C-MRATE to the MPC10E-15C-MRATE.

Description

- Weight: 20.4 lb (9.25 Kg)
- Model number: MPC10E-15C-MRATE
- Name in the CLI: MPC10E 3D MRATE-15xQSFP

Hardware features

- Fixed-configuration MPC with 10-Gbps, 40-Gbps, 100-Gbps, and 400-Gbps port speeds.
- Line-rate throughput of up to 1.5 Tbps on MX240, MX480, and MX960 5G Universal Routing Platforms when installed with an enhanced midplane. If you are running Junos OS Release 19.1R1 you must have an enhanced midplane installed.

NOTE: In the CLI, when you run the `show chassis hardware` command, the midplane description says Enhanced <platform> Backplane.

- Line-rate throughput of up to 800 Gbps on MX240, MX480, and MX960 5G Universal Routing Platforms when installed with a standard midplane. Support for the standard midplane starts in Junos OS Release 19.2R1.

NOTE: In the CLI, when you run the `show chassis hardware` command, the midplane description says <platform> Backplane.

- Contains the following port types:
 - QSFP28 ports—Port numbers 0/0 through 0/3, 1/0 through 1/3, and 2/0 through 2/3 (10-Gbps, 40-Gbps, and 100-Gbps port speeds supported).
 - QSFP56-DD ports—Port numbers 0/4, 1/4, and 2/4 (10-Gbps, 40-Gbps, 100-Gbps, and 400-Gbps port speeds supported).
 - The Processor Mezzanine Board (PMB) consists of a 1.6-GHz Intel Broadwell 8-core CPU, 100-GB SATA SSD, and two 16-GB ECC DDR4 DRAM modules.
 - Three Packet Forwarding Engines, each providing a maximum bandwidth of 500 Gbps.
 - Juniper Penta silicon for increased scaling for bandwidth, subscribers, and services.
 - Supports maximum transmission units (MTUs) from 256 bytes through 16,000 bytes for transit traffic, and from 256 bytes through 9500 bytes for host-bound packets.
 - To achieve maximum line-rate performance, the MPC's fabric redundancy mode must be configured in increased bandwidth mode.
 - To achieve maximum performance, the following number of SCBE3-MX switch control boards must be installed in the system:
 - MX960—3 SCBE3-MX
 - MX240 and MX480—2 SCBE3-MX
 - Requires high-capacity power supplies and high-capacity fan trays used in MX Series routers.
-

- On MX960 routers, the MPC10E-15C-MRATE is not supported in the line-card slots numbered 10 and 11.

Software features

- Media Access Control Security is supported. See *Understanding Media Access Control Security (MACsec)*.
- Security Support:
 - *Secure boot* (see *Secure Boot*)

For more information about features supported on MPC10E, see "[Protocols and Applications Supported by the MPC10E](#)" on page 615.

Power requirements

The power numbers are measured using the following configuration:

- IPv4 forwarding with 200-bytes packet size.
- Line-rate traffic on all ports for 1.5 Tbps aggregate bandwidth.
- All 15 ports are configured for 100-Gigabit Ethernet, with QSFP28 LR4 transceivers installed on all ports.

At different temperatures:

- 104° F (40° C): 785 W
 - 77° F (25° C): 720 W
-

LEDs

OK/FAIL LED, one bicolor:

- Green—MPC is functioning normally.
- Red—MPC has failed.

Port LED:

- Off—Port link is down with loss of signal.
- Green—Port link is up with no alarms or failures.
- Amber—Port link is down with alarms. Or the port has been administratively disabled through the CLI.
- Red—A transceiver on the port is experiencing a fault.

Lane LED:

There are four Lane LEDs, which are shared by the network ports. The lane LEDs work with the Junos OS software to determine which port the Lane LEDs are displaying the status for.

The Lane LEDs are used for the following configurations:

- When a network port is configured for 4 x 10-Gigabit Ethernet channelized interfaces with a breakout cable.
- When a network port is configured for 4 x 25-Gigabit Ethernet channelized interfaces with a breakout cable.

See *MPC and MIC Lane LED Scheme Overview* for more details.

Cables and connectors

You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at [MX Series Supported Transceivers](#).

Starting in Junos OS Release 19.3R1, the MPC10E-15C-MRATE supports 25-Gbps port speeds when the network port is configured for 4 x 25-Gigabit Ethernet channelized interfaces with a breakout.

The QDD-400G-LR8 transceiver is supported at certain ambient temperature and altitude combinations. The following table lists the supported combinations.

Altitude (Feet Above Sea Level)	Maximum Ambient Temperature
6000	36° C (96.8° F)
5000	37° C (98.6° F)
4000	38° C (100.4° F)
3000	39° C (102.2° F)
2000 and below	40° C (104° F)


MX2K-MPC11E Modular Port Concentrator

IN THIS SECTION

- [MX2K-MPC11E Port Panel | 228](#)
- [QSFP Transceivers and Port Speeds | 229](#)
- [Maximum MX2K-MPC11E Support Per Chassis | 232](#)

The MX2K-MPC11E is a fixed-configuration Module Port Concentrator (MPC) which delivers bandwidth up to 4-Tbps per MPC slot for MX2020 and MX2010 routers. See [Figure 10 on page 225](#).

Figure 10: MX2K-MPC11E Modular Port Concentrator

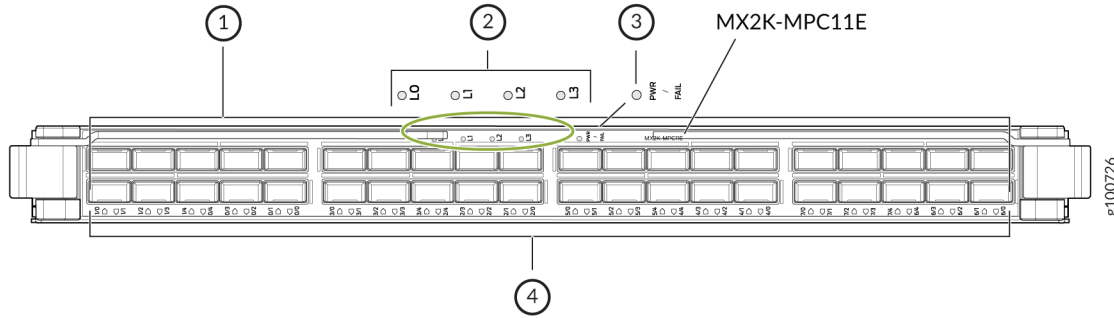

1– Port Panel	3– PWR/FAIL LED
2– Lane LEDs	4– QSFPP Port Link/Traffic Port LEDs

- Software release
- Junos OS Release 19.3R2 and later 19.3 releases
 - Junos OS Release 20.1R1 and later releases

NOTE: The MX2K-MPC11E is not supported in any Junos OS 19.4 releases.

- Physical Description
- Weight: 36.2 lb (16.4 kg)
 - Model number: MX2K-MPC11E
 - Name in CLI: MPC11E 3D MRATE-40xQSFPP
 - Number of ports: 40

- Prerequisites
- Requires at least one MX2000-SFB3 switch fabric board.
 - Requires one of the following routing engines:
 - RE-MX2000-1800X4
 - REMX2K-1800-32G
 - REMX2K-X8-128G
 - REMX2K-X8-64G

Hardware features	<ul style="list-style-type: none"> • WAN Interface: 4-Tbps bandwidth per MX2K-MPC11E. • High Scale and Density: For MX2020 routers, provides 80-Tbps of system capacity and support up to 800 100GbE interfaces or 160 400GbE interfaces. For MX2010 routers, provides 40-Tbps system capacity and support for up to 400 100GbE or 80 400GbE interfaces. • 400-Gbps with multi-rate QSFP56-DD interfaces • MACsec-ready for secure connectivity up to 100-Gbps port speeds • Channelization: Supports 4x10-Gbps and 25-Gbps via port channelization using breakout cables • Multi-rate 4x10-GbE, 40-GbE, and 100-GbE, 4x100-GbE, and 400-GbE ports • Seamless deployment: works with your existing power and cooling infrastructure
-------------------	--

Software features	For more information about the software features supported on the MX2K-MPC11E, see Protocol and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers .
-------------------	--

Power requirements	<p>The power numbers are measured using the following configuration:</p> <ul style="list-style-type: none"> • Line-rate traffic on all ports for 4-Tbps aggregate bandwidth • All 40 ports configured for 100-Gbps with QSFP28 transceivers installed in all ports <p>The default ambient temperature for MX2000 routers is set to 104° F (40° C). You can set the ambient temperature to 77° F (25° C) or 72°F (22° C) using a CLI configuration command.</p> <p>Maximum power: 1980 W at 72° F (22 C°) + 6000 ft. (1829 m)</p> <p>NOTE: When operating the MX2K-MPC11E in ambient temperatures above the maximum normal operating temperature of 104° F (40 C) you may see a decrease in performance. This situation is normal, and the card is operating as designed. If a decrease in performance does occur, a yellow alert appears on the system. The decrease in performance is not a permanent situation. This may occur during NEBS operating environmental conditions.</p>
--------------------	---

LEDs

PWR/FAIL LED:

- Steady green—MPC is functioning normally
- Slow blinking green—MPC is initializing
- Fast blinking green—MPC is being identified by software
- Red—MPC has failed

QSFP Port Link/Traffic Port LED:

- Off—Port link is down with loss of signal
- Green—Port link is up with no alarms or failures
- Amber—Port link is down with alarms, or the port has been administratively disabled through the CLI
- Red—A transceiver on the port is experiencing a fault

Lane LEDs (L0, L1, L2, L3):

When Port 0 is channelized for 4x10-Gbps, the link status for the device connected to the channelized port is indicated by one of four lane LEDs on the MX2K-MPC11E port panel. Like the QSFP Port Link/Traffic Port LEDs, each individual lane LED has four states: off, green, amber, and red. See [Configuring Rate Selectability on the MX2K-MPC11E to Enable Different Port Speeds](#) and [MPC and MIC Lane Scheme Overview](#) for more details.

NOTE: For the 40GbE and 100GbE modes, the lane LEDs are not applicable.

Supported Transceivers

TIP: Use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on the MX2K-MPC11E.

Upgrades

Programmable components in the MX2K-MPC11E, including complex programmable logic devices (CPLD), are field-upgradable.

MPC Interoperability	<p>The MX2K-MPC11E is interoperable with these MPCs:</p> <ul style="list-style-type: none"> • MX2K-MPC11E • MPC6E • MPC8E • MPC9E • MS-MPC
Switch Fabric Board Interoperability	<p>The MX2K-MPC11E supports only MX2000-SFB3 switch fabric boards. It does not support legacy switch fabric boards (SFB or SFB2).</p>
Supported Routing Engines	<p>The MX2K-MPC11E supports these routing engines:</p> <ul style="list-style-type: none"> • RE-MX2000-1800X4 • REMX2K-1800-32G • REMX2K-X8-128G • REMX2K-X8-64G
Supported Power Supply Modules	<p>The MX2K-MPC11E supports these power supply modules:</p> <ul style="list-style-type: none"> • MX2000-PSM-AC • MX2000-PSM-DC <p>NOTE: With the existing power supplies, an MX2020 can support a maximum of 14 MX2K-MPC11E (seven in the top MPC slots and seven in the bottom MPC slots) while maintaining PSM redundancy in each zone. The MX2010 with existing power supplies can support a maximum of six MX2K-MPC11E and maintain PSM redundancy.</p>

MX2K-MPC11E Port Panel

The MX2K-MPC11E port panel has 40 rate-selectable (multi-rate) ports that support quad small form-factor pluggable plus (QSFP28) transceivers. The MX2K-MPC11E has eight built-in PICs, **PIC0** to **PIC7**. Each PIC has five physical ports which constitute a logical PIC in the software. The default port speed is 100-Gbps for all ports. You can channelize Port 0 using Junos OS CLI configuration commands to create


multiple independent 4x10 Gbps interfaces, and then use breakout cables to connect to other servers, storage devices, and routers. [Table 25 on page 230](#) lists the optical transceivers that support channelization. For instructions on how to channelize ports, see [Configuring Rate Selectability on the MX2K-MPC11E to Enable Different Port Speeds](#).

NOTE: When you configure different data rates for Port 0 in a PIC, the total throughput for the PIC can't exceed 500 Gbps.

You'll notice that the ports have colored lines above them. The colors help you to easily identify the ports that are associated with the same PIC/PFE. As shown in [Figure 11 on page 229](#), here's what the colors mean:

- Purple—Indicates an adjacent five-port PIC segment. Each port group has an adjacent five-port PIC segment.
- Green—Indicates a five-port PIC segment.
- Yellow—Indicates the 400-Gbps-capable ports on each PIC.

Figure 11: Port Numbering for the MX2K-MPC11E

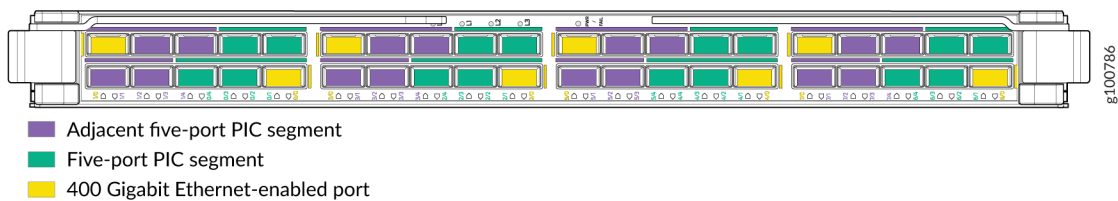

The purple and green lines in a port group denote the five ports associated with a PIC. For example, starting with the port groups on the left side of the port panel, the five ports with a purple line above them all connect to PIC 1. The five ports with a green line above them all connect to PIC 0. The numbers and arrows below the bottom ports tell you the PIC/port number. The up arrow means that the PIC/port number is for the top port. The down arrow means that the PIC/port number is for the bottom port. The port numbering is not contiguous.

QSFP Transceivers and Port Speeds

You can plug 100-GbE optics into any of the 40 ports.

[Table 25 on page 230](#) summarizes the Packet Forwarding Engine mapping and the supported port speeds.

Table 25: Rate Selectability for the MX2K-MPC11E

PIC	Port Number	Port Speed Supported	Optics Supported
PIC 0 (or PFE 0)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	<ul style="list-style-type: none"> • 4x10 GbE support using QSFP-4x10GE breakout optics • 1x40GbE support using QSFP optics • 1x100GE support using QSFP28 optics
	1-4	100-Gbps	
PIC 1 (or PFE 1)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	<p>For the latest list of transceivers supported by MX2K-MPC11E, see this HCT page.</p> <p>NOTE: By default, all the active ports operate in 100-Gbps mode.</p>
	1-4	100-Gbps	
PIC 2 (or PFE 2)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	

Table 25: Rate Selectability for the MX2K-MPC11E (Continued)

PIC	Port Number	Port Speed Supported	Optics Supported
PIC 3 (or PFE 3)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	
PIC 4 (or PFE 4)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	
PIC 5 (or PFE 5)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	

Table 25: Rate Selectability for the MX2K-MPC11E (Continued)

PIC	Port Number	Port Speed Supported	Optics Supported
PIC 6 (or PFE 6)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	
PIC 7 (or PFE 7)	0	40-Gbps 4x10-Gbps 100-Gbps 4x100-Gbps 400-Gbps	
	1-4	100-Gbps	

Maximum MX2K-MPC11E Support Per Chassis

The number of MX2K-MPC11E line cards that the MX2020 and MX2010 router chassis can support varies, depending upon the ambient temperature of the chassis and the PSM redundancy. [Table 26 on page 233](#) shows the number of MX2K-MPC11E line cards that are supported on the MX2020 router with fully populated, existing PDMs and PSMs (in redundant and non-redundant modes) at 40 C° (72° F) + 6000 ft. (1829 m).

Table 26: MX2K-MPC11E Line Card Maximums Per PSM Redundancy, Temperature, and Elevation for MX2020 Routers

	With PSM Redundancy	Without PSM Redundancy	Temperature and Elevation
Upper Zone	7	8	40 C° (72° F) + 6000 ft. (1829 m)
Lower Zone	7	8	40 C° (72° F) + 6000 ft. (1829 m)
Total	14	16	40 C° (72° F) + 6000 ft. (1829 m)

Table 27 on page 233 shows the number of MX2K-MPC11E line cards that are supported on the MX2010 router with fully populated, existing PDMs and PSMs (in redundant and non-redundant modes) at 40 C° (72° F) + 6000 ft. (1829 m).

Table 27: MX2K-MPC11E Line Card Maximums Per PSM Redundancy, Temperature, and Elevation for MX2010 Routers

MX2010 Line Card Type	Maximum Supported With PSM Redundancy	Maximum Supported Without PSM Redundancy	Temperature and Elevation
MX2K-MPC11E	6	7	40 C° (72° F) + 6000 ft. (1829 m)

RELATED DOCUMENTATION

[Protocols and Applications Supported by the MX2K-MPC11E | 634](#)

[Configuring Port Speed on Routing Devices and Line Cards](#)

[MX2000-SFB3 Switch Fabric Board Description](#)

[Removing and Installing MX10008 MPC Components](#)

MX Series MIC Descriptions


IN THIS CHAPTER

- ATM MIC with SFP | 235
- DS3/E3 MIC | 240
- Gigabit Ethernet MIC with SFP | 246
- Gigabit Ethernet MIC with SFP (E) | 251
- Gigabit Ethernet MIC with SFP (EH) | 257
- Gigabit Ethernet MIC with 256b-AES MACsec | 260
- 10-Gigabit Ethernet MICs with XFP | 264
- 10-Gigabit Ethernet MIC with SFP+ (10 Ports) | 268
- 10-Gigabit Ethernet MIC with SFP+ (24 Ports) | 271
- 10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports) | 273
- 40-Gigabit Ethernet MIC with QSFP+ | 276
- 100-Gigabit Ethernet MIC with CFP | 279
- 100-Gigabit Ethernet MIC with CXP | 281
- 100-Gigabit Ethernet MIC with CXP (4 Ports) | 283
- 100-Gigabit Ethernet MIC with CFP2 | 285
- 100-Gigabit DWDM OTN MIC with CFP2-ACO | 289
- Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP | 300
- Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP | 309
- Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H) | 314
- Channelized E1/T1 Circuit Emulation MIC | 319
- Channelized E1/T1 Circuit Emulation MIC (H) | 323
- Tri-Rate MIC | 329
- MIC MRATE | 334
- Multiservices MIC | 338
- SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP | 341
- Multi-Rate Ethernet MIC | 348

- Multi-Rate Ethernet MACSEC MIC | 355
- SONET/SDH OC192/STM64 MIC with XFP | 360

ATM MIC with SFP

Figure 12: 8-Port ATM MIC with SFP

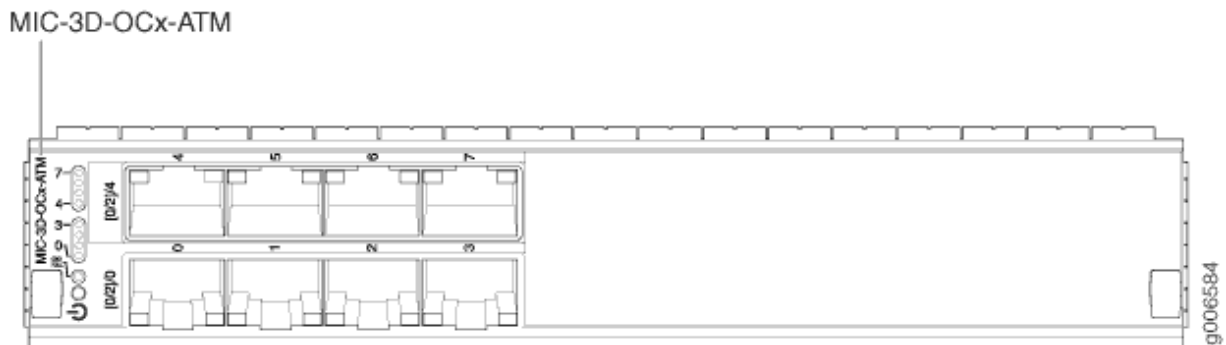

Software release

- Junos 12.1 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility"](#) on page 45. For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers"](#) on page 27.

Description

- Rate-selectable using one of the following rates:
 - 8-port OC3
 - 2-port OC12
- Power requirement: 0.73 A @ 48 V (35 W)
- Weight: 1.2 lb (0.54 kg)
- Model number: MIC-3D-8OC3-2OC12-ATM
- Name in the CLI: 3D 80C3 20C12 ATM

- Hardware features
- High-performance parsing of SONET/SDH frames
 - Packet segmentation and reassembly (SAR) management and output port queuing
 - Packet buffering, Layer 2 parsing
 - Line rate throughput for each port
-

- Software features
- Circuit cross-connect (CCC) for leveraging ATM access networks
 - User-configurable virtual circuit (VC) and virtual path (VP) support
 - Support for idle cell or unassigned cell transmission
 - OAM fault management processes alarm indication signal (AIS), remote defect indication (RDI) cells, and loop cells
 - Point-to-point and point-to-multipoint mode Layer 2 counters per VC and per VP
 - Local and remote loopback
 - Simple Network Management Protocol (SNMP):
 - Management Information Base (MIB) 2 (RFC 1213)
 - ATM MIB (RFC 1695)
 - SONET MIB
 - PWE3 MIB (RFC 5603)
 - PW-ATM-MIB (RFC 5605)
 - PW-FRAME-MIB (RFC 5601)
 - MIB for CoS
 - Unspecified bit rate (UBR), non-real-time variable bit rate (VBR), and constant bit rate (CBR) traffic shaping
 - Per-VC or per-VP traffic shaping
 - Support for F4 OAM cells (AIS, RDI, Loopback, and Continuity Check)
 - Support for F5 OAM cells (AIS, RDI, Loopback, and Continuity Check)
 - Support for 16 bit VCI range
 - Encapsulations:
 - atm-ccc-cell-relay (Junos 12.1 and later)
 - atm-ccc-vc-mux (Junos 12.1 and later)
-

- atm-snap (Junos 12.2 and later)
- atm-vc-mux (Junos 12.2 and later)
- atm-tcc-snap (Junos 13.3 and later)
- atm-tcc-vc-mux (Junos 13.3 and later)
- vlan-vci-ccc (Junos 16.1 and later)
- ether-over-atm-llc
- ppp-over-ether-over-atm-llc
- atm-ppp-vc-mux

NOTE: Inline MLPPP is not supported on this MIC.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Link LED, one green per port:

- Off—No link.
 - On steadily—Link is up.
 - Blinking—Online with alarms for remote failures
 - Blinking rapidly—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- Alarm indication signal—line (AIS-L)
- Alarm indication signal—path (AIS-P)
- Bit error rate—signal degrade (BERR-SD)
- Bit error rate—signal fail (BERR-SF)
- Loss of cell delineation (LOC)
- Loss of frame (LOF)
- Loss of pointer (LOP-P)
- Loss of signal (LOS)
- Payload mismatch (PLM-P)
- Payload unequipped (unequipped STS at path level) (UNEQ-P)
- Remote defect indication—line (RDI-L)
- Remote defect indication—path (RDI-P)
- Error detection:
 - Bit interleaved parity errors B1, B2, B3
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end bit errors, remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit errors, remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored framing (SEF)
 - Severely errored framing seconds (SEFS-S)

- Severely errored seconds (SES-S, SES-L, SES-P)
- Unavailable seconds (UAS-L, UAS-P)

NOTE: MIC-3D-8OC3-2OC12-ATM Revision 8 and Revision 22 are supported only by the following Junos OS releases:

- Junos OS Release 12.3–12.3R9 and later
- Junos OS Release 13.3–13.3R6 and later
- Junos OS Release 14.1–14.1R4 and later
- Junos OS Release 14.2–14.2R3 and later
- Junos OS Release 15.1 and later


You must upgrade to a supported Junos OS release to use MIC-3D-8OC3-2OC12-ATM Revision 8 and Revision 22 and later.

RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

DS3/E3 MIC

Figure 13: DS3/E3 MIC

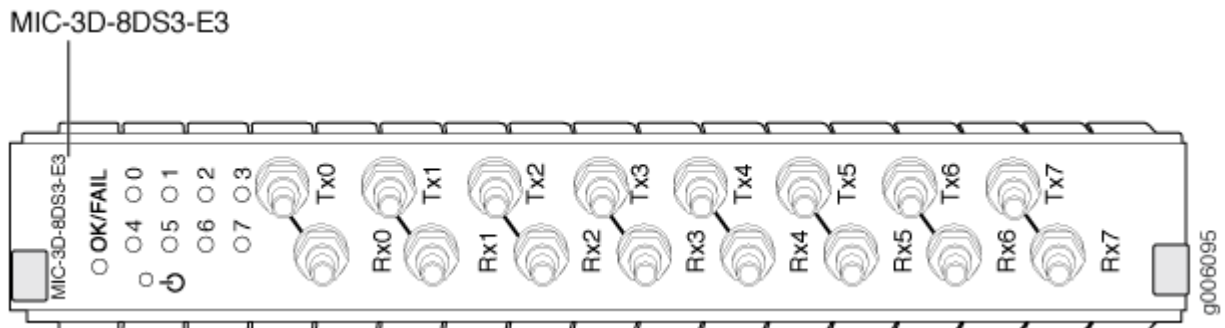

- Software release
- Junos OS Release 11.4 and later

For information on which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- Eight E3 or DS3 ports
- DS3/E3 MIC ports can be configured as one of the following:
 - 8 clear-channel DS3 ports
 - 8 channelized DS3 ports
 - 8 clear-channel E3 ports

NOTE: You can upgrade the DS3/E3 MIC with the S-MIC-3D-8CHDS3 software license (purchased separately) to support DS3 channelization. Channelized DS3/E3 MIC is supported only on queuing MPCs. On the MX80 router, you also need an S-MX80-Q software license.

- DS3 or E3 is configurable on a per-port granularity
- DS3 channelization for the 8-port Channelized DS3/E3 MIC:
 - 8 DS3 channels
 - 224 DS1 channels
 - 2038 DS0 channels
- Power requirement: 4.0 A @ 9 V (36W)
- Weight: 4.4 lb (2 kg)
- Model numbers:
 - DS3/E3 MIC: MIC-3D-8DS3-E3
 - Channelized DS3/E3 MIC: MIC-3D-8CHDS3-E3-B

-
- Hardware features
- Ports are numbered 0 through 7, Tx0 through Tx7 and Rx0 through Rx7
-

- Software features
- Maximum transmission units (MTUs) of up to 9192 bytes
 - Framing: M13, C-bit parity, framed clear channel
 - Subrate and scrambling:
NOTE: Only DS3 interfaces support subrate and scrambling.
 - Digital Link/Quick Eagle
 - Kentrox
 - Larscom
 - ADTRAN
 - Verilink
 - Internal and look clocking
 - DS3 far-end alarm and control (FEAC) channel
 - Full bit error rate test (BERT) for DS0, DS1, and DS3
 - Encapsulations:
 - MPLS fast reroute
 - MPLS CCC (circuit cross-connection)
 - MPLS TCC (translational cross-connection)
 - Cisco High-Level Data Link Control (cHDLC)
 - Cisco HDLC CCC
 - Cisco HDLC TCC
 - Point-to-Point Protocol (PPP)
 - PPP for CCC
 - PPP for TCC
 - Flexible Frame Relay
-

- Frame Relay
- Frame Relay for CCC
- Frame Relay for TCC
- PPP over Frame Relay

NOTE: Ethernet over Frame Relay is not supported.

- Encapsulations available only for Channelized DS3/E3 MIC (Junos OS Release 12.1 and later):
 - Multilink Point-to-Point Protocol (MLPPP)
 - Multiclass MLPPP
 - Multilink Frame Relay (MLFR) end-to-end (FRF.15)
 - Multilink Frame Relay (MLFR) UNI NNI (FRF.16, also referred to as MFR)
 - Compressed Real-Time Transport Protocol (CRTP)

NOTE: When you configure multilink services on a MIC in an MX Series router, ensure that a Multiservices DPC is present in the same router.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- Coaxial:

Custom 10-ft (3-m) mini-SMB to BNC cable (model number: CBL-DS3-E3-M-S), set of 8 cables (bundled RX and TX)

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

Link LED, one green per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

DS3 alarms:

- Alarm indication signal (AIS)
- Loss of frame (LOF)
- Loss of signal seconds (LOS)
- Phase lock loop (PLL)

DS3 error detection:

- C-bit code violations (CCV)
- C-bit errored seconds (CES)
- C-bit severely errored seconds (CSES)
- CRC errors
- Excessive zeros (EXZ)
- Far-end block error (FEBE)
- Far-end receive failure (FERF)
- Line errored seconds (LES)
- Parity bit (P-bit) code violations (PCV)
- Parity bit (P-bit) errored seconds (PES)
- Parity bit (P-bit) severely errored framing seconds (PSES)
- Severely errored framing seconds (SEFS)
- Unavailable seconds (UAS)

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26


Gigabit Ethernet MIC with SFP

IN THIS SECTION

- Port Numbering | 249

Figure 14: 20-Port Gigabit Ethernet MIC with SFP

MIC-3D-20GE-SFP

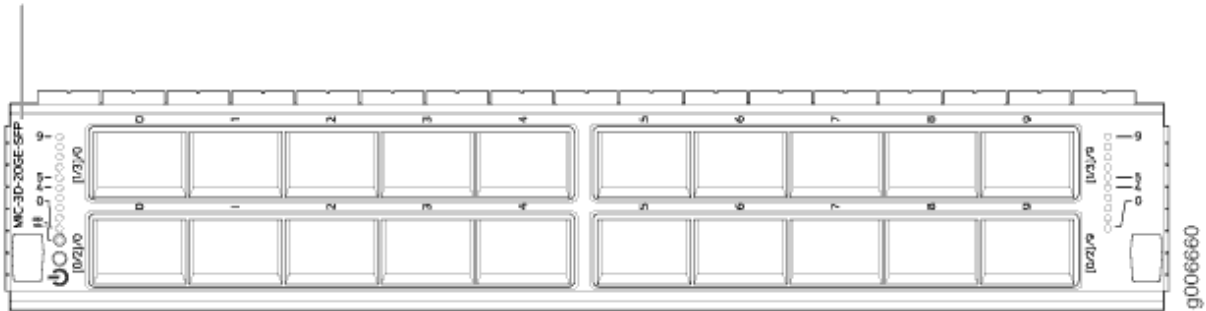

Software release

- Junos 10.1 and later

For information on which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- 20 Gigabit Ethernet ports
- Power requirement: 0.77 A @ 48 V (37 W)
- Weight: 1.2 lb (0.54 kg)
- Model number: MIC-3D-20GE-SFP
- Name in the CLI: 3D 20GE SFP

- Hardware features
- High-performance throughput on each port at speeds up to 1 Gbps
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Up to 20-Gbps of full-duplex traffic
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- *fpc*: Slot in the router where the MPC is installed
- *pic*: The logical PIC number on the MIC, numbered 0, 1, 2, and 3.
- *port*: 0 through 9

For example, *ge-3/3/0* is the interface for port 0 in PIC 3 on the MPC installed in slot 3.

[Figure 15 on page 249](#), [Figure 16 on page 250](#), and [Figure 17 on page 251](#) show examples of the port numbering for the Gigabit Ethernet MIC with SFP installed in an MX960, MX480, and MX240, respectively.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Link LED, one green per port:

- Off—No link.
 - On steadily—Link is up.
-

Port Numbering

Figure 15 on page 249, Figure 16 on page 250, and Figure 17 on page 251 show examples of the port numbering for the Gigabit Ethernet MIC with SFP on the MX960, MX480, and MX240, respectively.

Figure 15: Port Numbering for the Gigabit Ethernet MIC with SFP (MX960)


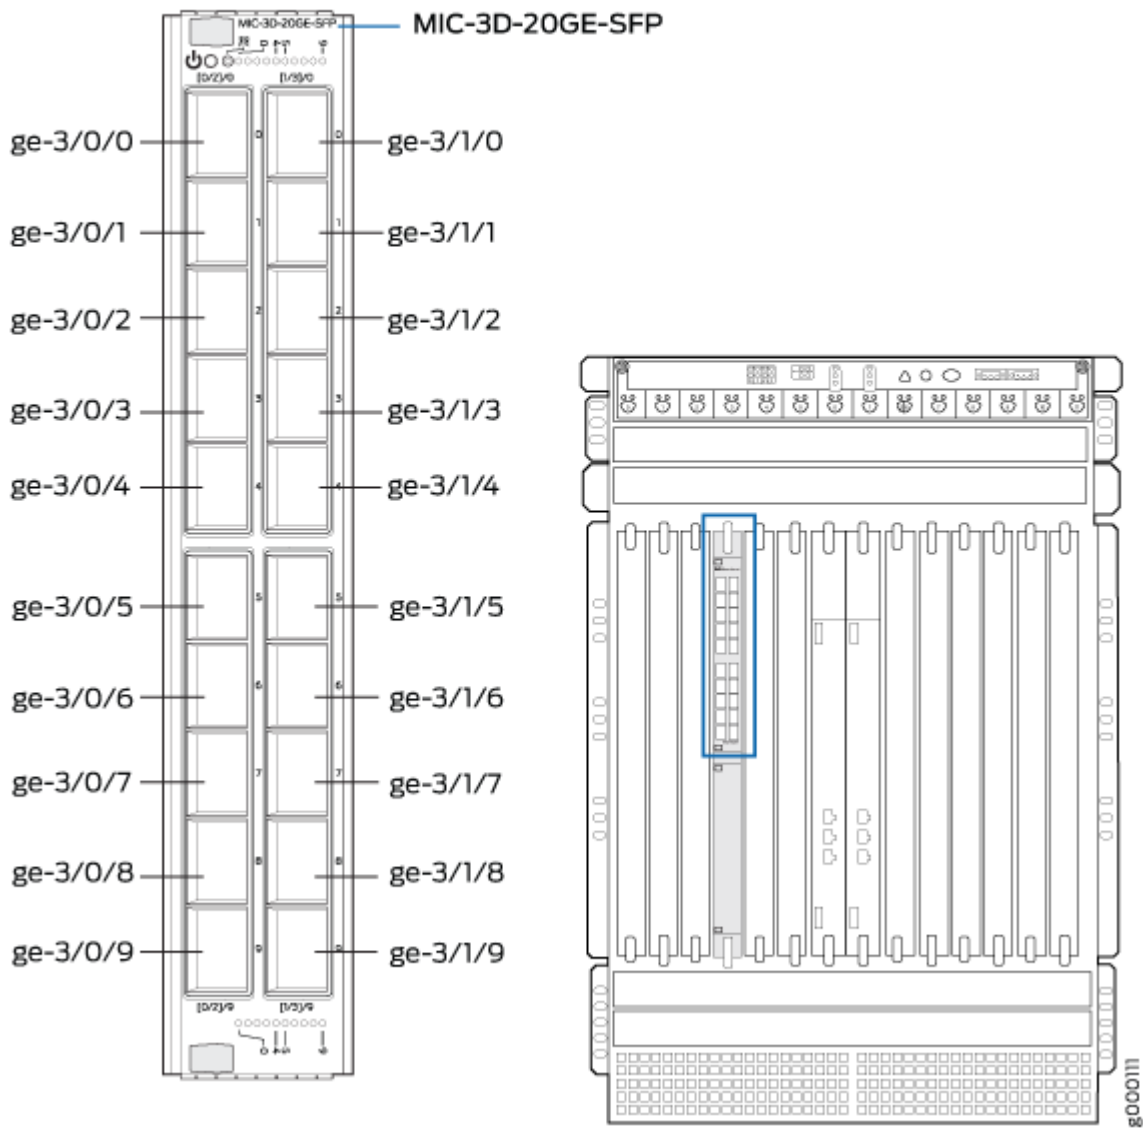


Figure 16: Port Numbering for the Gigabit Ethernet MIC with SFP (MX480)

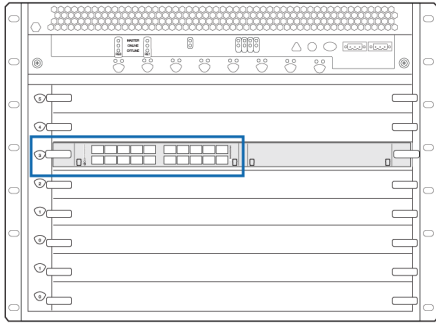

MIC-3D-20GE-SFP



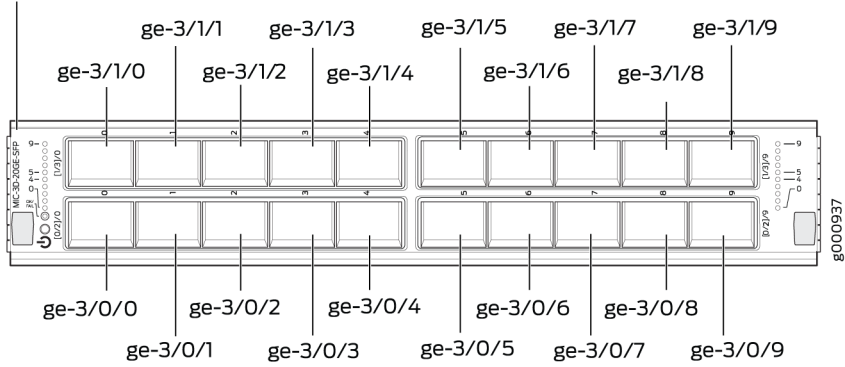


Figure 17: Port Numbering for Gigabit Ethernet MIC with SFP (MX240)

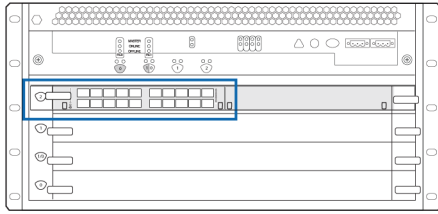

MIC-3D-20GE-SFP

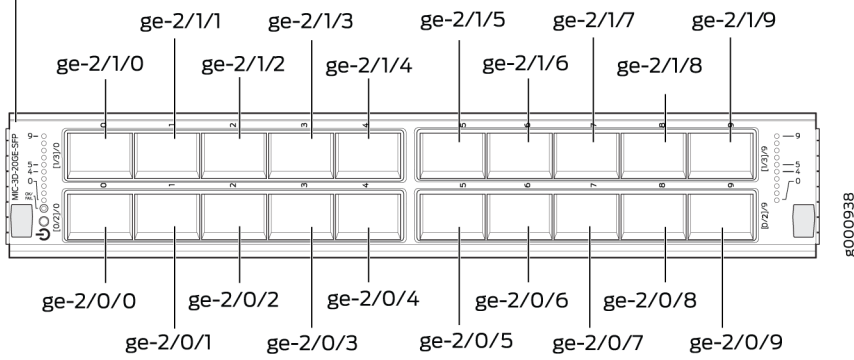


RELATED DOCUMENTATION

[MX Series MIC Overview | 26](#)

Gigabit Ethernet MIC with SFP (E)

Figure 18: 20-Port Gigabit Ethernet MIC with SFP (E)

MIC-3D-20GE-SFP-E

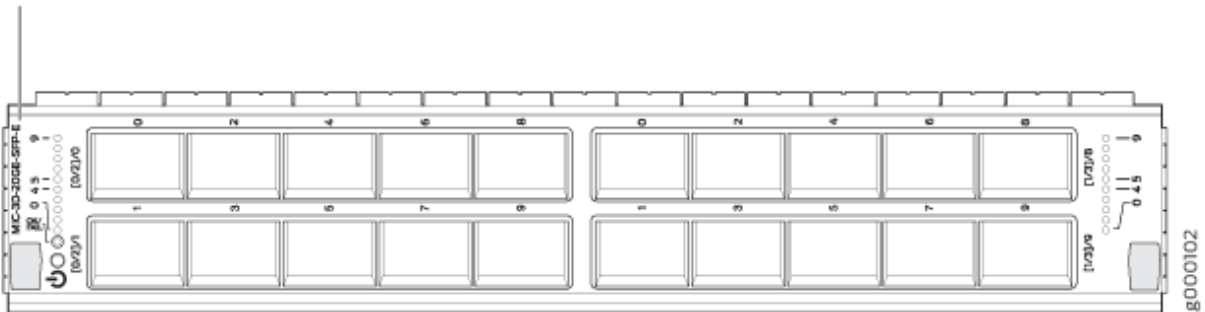

Software release

- Junos 13.2R2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- 20 Gigabit Ethernet ports
- Power requirement: 0.77 A @ 48 V (37 W)
- Weight: 1.2 lb (0.54 kg)
- Model number: MIC-3D-20GE-SFP-E
- Name in the CLI: 3D 20x 1GE(LAN)-E,SFP

Hardware features

- High-performance throughput on each port at speeds up to 1 Gbps
- Auto-negotiation between Gigabit Ethernet circuit partners
- Up to 20-Gbps of full-duplex traffic
- Maximum transmission units (MTUs) of up to 9192 bytes
- Environmentally hardened for 32° F (0° C) to 131° F (55° C) operating temperatures
- SEC PHY
- Timing PHY

- Software features
- Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
 - Precision Time Protocol (PTP) or IEEE 1588v2
 - Media Access Control Security (MACsec)

Interfaces

Syntax: *ge-fpc/pic/port* where:

- *fpc*: Slot in the router where the MPC is installed. The MPCs are represented in the CLI as FPC0 through FPC19.
- *pic*: The logical PIC number on the MIC, numbered 0 or 1. [Figure 19 on page 255](#), [Figure 20 on page 256](#), and [Figure 21 on page 257](#) illustrate the port numbering for the Gigabit Ethernet MIC with SFP (E) installed in the MX960, MX480, and MX240, respectively.
- *port*: 0 through 9.

For example, *ge-3/1/0* is the interface for port 0 in PIC 1 on the MPC installed in slot 3.

[Figure 19 on page 255](#), [Figure 20 on page 256](#), and [Figure 21 on page 257](#) illustrate the port numbering for the MIC-3D-20GE-SFP-E installed in an MX960, MX480, and MX280, respectively.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Link LED, one green per port:

- Off—No link.
 - On steadily—Link is up.
-

Figure 19: Port Numbering for the MIC-3D-20GE-SFP-E (MX960)


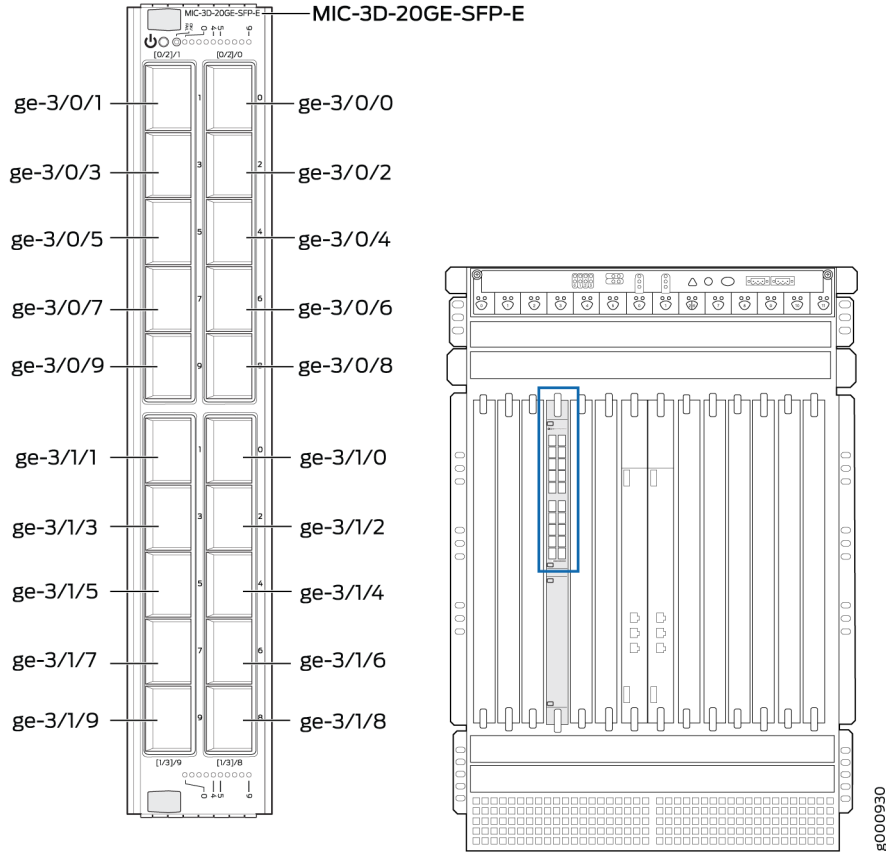


Figure 20: Port Numbering for the MIC-3D-20GE-SFP-E (MX480)

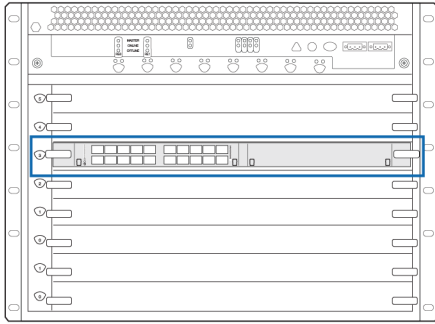

MIC-3D-20GE-SFP-E



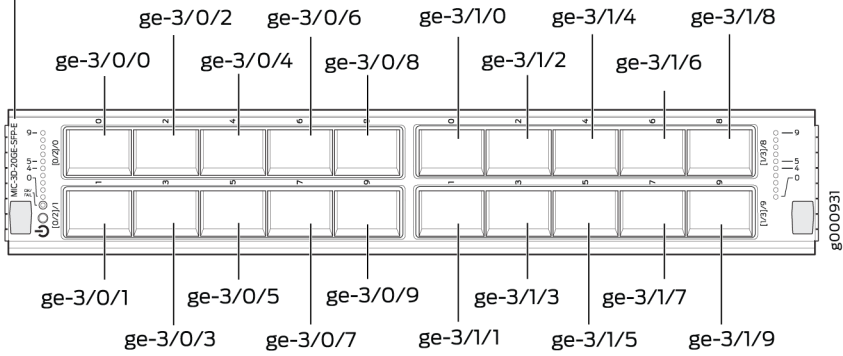


Figure 21: Port Numbering for the MIC-3D-20GE-SFP-E (MX240)

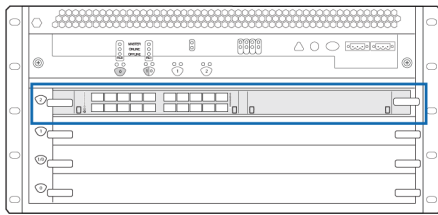

MIC-3D-20GE-SFP-E

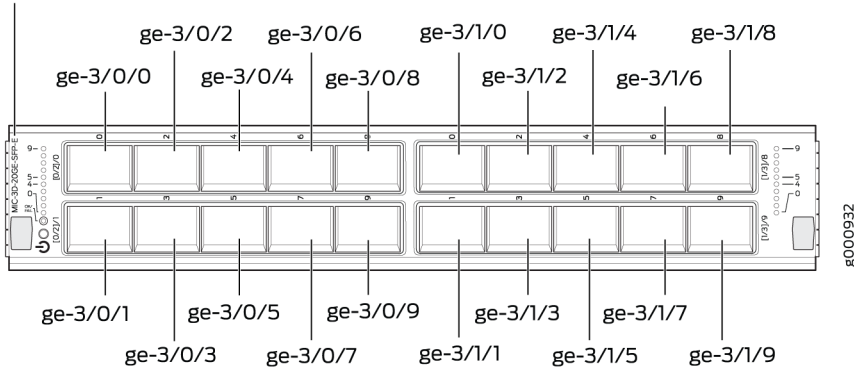


RELATED DOCUMENTATION

[MX Series MIC Overview | 26](#)

Gigabit Ethernet MIC with SFP (EH)

Figure 22: 20-Port Gigabit Ethernet MIC with SFP (EH)

MIC-3D-20GE-SFP-EH

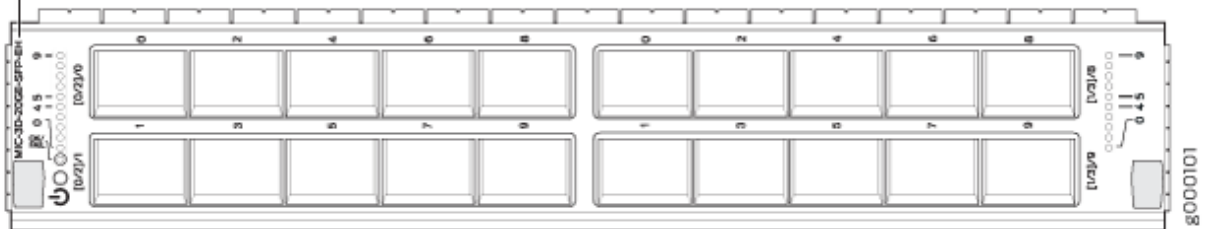

Software release

- Junos 13.2R2 and later

For information on which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- 20 Gigabit Ethernet ports
 - Power requirement: 0.77 A @ 48 V (37 W)
 - Weight: 1.2 lb (0.54 kg)
 - Model number: MIC-3D-20GE-SFP-EH
 - Name in the CLI: 3D 20x 1GE(LAN)-EH,SFP
-

Hardware features

- High-performance throughput on each port at speeds up to 1 Gbps
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Up to 20-Gbps of full-duplex traffic
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - Environmentally hardened for -40° F (-40° C) to 149° F (65° C) operating temperatures
 - SEC PHY
 - Timing PHY
-

- Software features
- Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
 - Precision Time Protocol (PTP) or IEEE 1588v2
 - Media Access Control Security (MACsec)
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- fpc: Slot in the router where the MPC is installed
- pic: 0 (left grouping of 10 ports) or 1 (right grouping of 10 ports) when installed in MIC slot 0; 2 (left grouping of 10 ports) or 3 (right grouping of 10 ports) when installed in MIC slot 1
- port: 0 through 9

For example, *ge-1/3/0* is the interface for port 0 in the right grouping of ports on the MIC installed in MIC slot 1 on an MPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Link LED, one green per port:


- Off—No link.
- On steadily—Link is up.

RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

Gigabit Ethernet MIC with 256b-AES MACsec

Figure 23: 20-Port Gigabit Ethernet MIC with MACsec

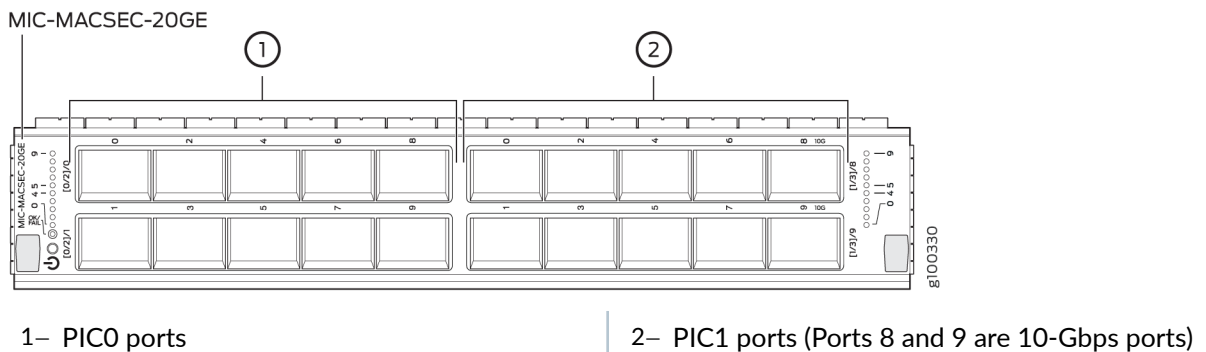

Software release

- Junos 18.3R1 and later

For information on which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- 20 Gigabit Ethernet ports
- Typical power requirement: 1A @ 48V (48 W)
Maximum power requirement: 1.25A @ 48V (60 W)
- Weight: 1.7 lb (0.77 kg)
- Model number: MIC-MACSEC-20GE
- Name in the CLI (MIC): 2x10GE SFPP/20x10GE SFP MACSEC
Name in the CLI (PIC): 1x10GE SFPP/10x1 GE SFP MACSEC

NOTE: FPCs in the MX240, MX480, MX960 routers and the FEB in the MX80 and MX104 routers undergo an automatic bounce or a reboot when the port speed alternates between 1-Gbps and 10-Gbps.

Hardware features

- 20 SFP ports supporting 20 SFP optics modules operating in 1-Gbps mode or two SFP+ ports supporting 2 SFP+ optics modules operating in 10-Gbps mode.
NOTE: The MIC can operate either in 2x10 - Gbps mode or in 20x1-Gbps mode. Mixed mode (1x10G + 10x1G) is not supported.
 - Up to 20-Gbps of full-duplex traffic
 - Maximum transmission units (MTUs) of up to 9192 bytes
 - SEC PHY
-

- Software features
- Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
 - Media Access Control Security (MACsec)
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- *fpc*: Slot in the router where the MPC is installed. The MPCs are represented in the CLI as FPC0 through FPC9.
- *pic*: The logical pics in MIC0 are 0 and 1, while in MIC1, they are 2 and 3. [Figure 24 on page 263](#), illustrates the port numbering for the Gigabit Ethernet MIC with MACsec installed in the MX960.
- *port*: 0 through 9.

For example, *ge-3/1/0* is the interface for port 0 in PIC 1 on the MPC installed in slot 3.

[Figure 24 on page 263](#), illustrate the port numbering for the MIC-MACSEC-20GE installed in an MX960.

NOTE: When the MIC is operating in the 10-Gbps mode, all the other 1-Gbps ports are disabled.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs


OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Green Status LED, one per port:

- Off—Not enabled.
- On steadily—Port is online with no alarms or failures.

Figure 24: Port Numbering for the MIC-MACSEC-20GE

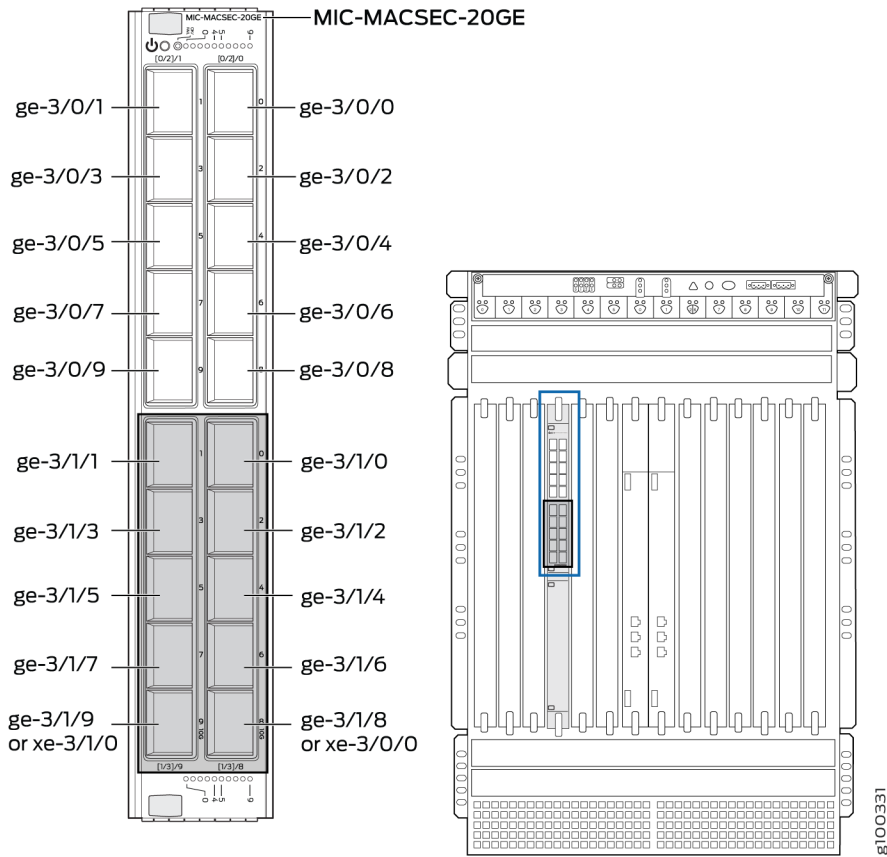

NOTE: In the 10-Gbps mode, the last two ports of the MIC which are marked as **10G ([1 / 3] / 8** and **[1 / 3] / 9**) can be used as 10-Gbps ports.

NOTE: When the MIC is operating in the 10-Gbps mode, all the other 1-Gbps ports are disabled.

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

10-Gigabit Ethernet MICs with XFP

Figure 25: 2-Port 10-Gigabit Ethernet MIC with XFP


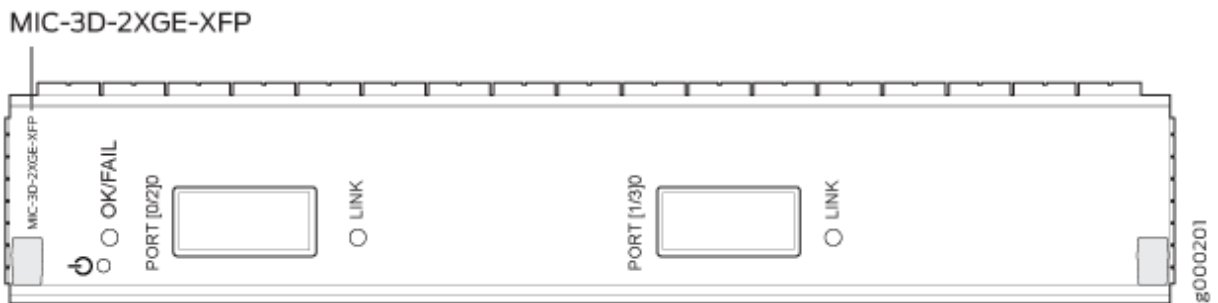


Figure 26: 4-Port 10-Gigabit Ethernet MIC with XFP

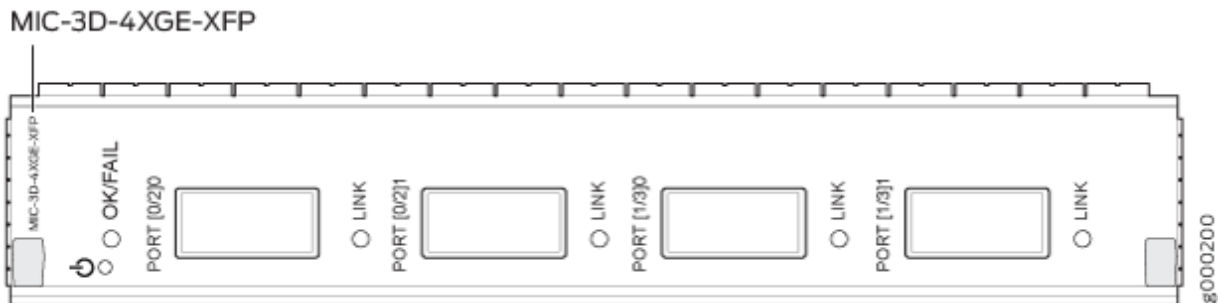

- Software release
- 2-port: Junos 10.2 and later
 - 4-port: Junos 10.1 and later

For information on which MPCs support these MICs, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

- Description
- Two or four 10-Gigabit Ethernet ports
 - Power requirement:
 - 2-port: 0.6 A @ 48 V (29 W)
 - 4-port: 0.56 A @ 48 V (27 W)
 - Weight:
 - 2-port: 1 lb (0.45 kg)
 - 4-port: 1.1 lb (0.5 kg)
 - Model number:
 - 2-port: MIC-3D-2XGE-XFP
 - 4-port: MIC-3D-4XGE-XFP
 - Name in the CLI:
 - 2-port: 3D 2X10GE XFP
 - 4:-port 3D 4X10GE XFP
-

- Hardware features
- High-performance throughput on each port at speeds up to 10 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.953 Gbps
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Configurable LAN-PHY and WAN-PHY mode options
 - Synchronous Ethernet support
 - Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)

Interfaces

Syntax: *xe-fpc/pic/port* where:

- fpc: Slot in the router where the MPC is installed
- pic:
 - 2-port: 0 or 1 when installed in MIC slot 0; 2 or 3 when installed in MIC slot 1
 - 4-port: 0 or 1 when installed in MIC slot 0; 2 or 3 when installed in MIC slot 1
- port:
 - 2-port: 0
 - 4-port: 0 or 1

For example, *xe-1/3/0* is the interface for port 0 on the MIC installed in MIC slot 1 on an MPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is up with or without activity.

The ports are labeled (see [Figure 27 on page 267](#) and [Figure 28 on page 268](#)).

- 2-port: [0/2]0, [1/3]0
- 4-port: [0/2]0, [0/2]1, [1/3]0, and [1/3]1

Figure 27: Port Numbering for 2-Port 10-Gigabit Ethernet MIC with XFP


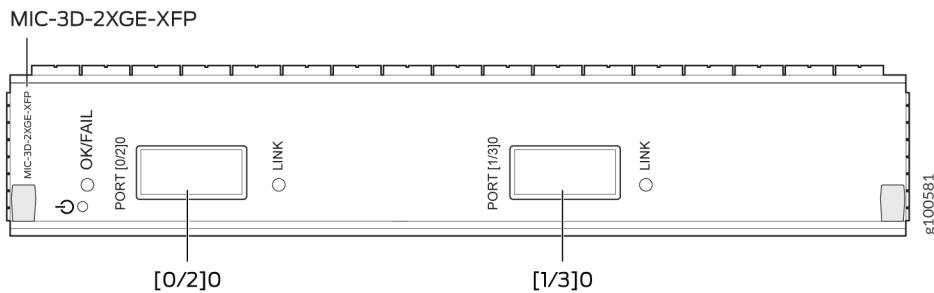


Figure 28: Port Numbering for 4-Port 10-Gigabit Ethernet MIC with XFP

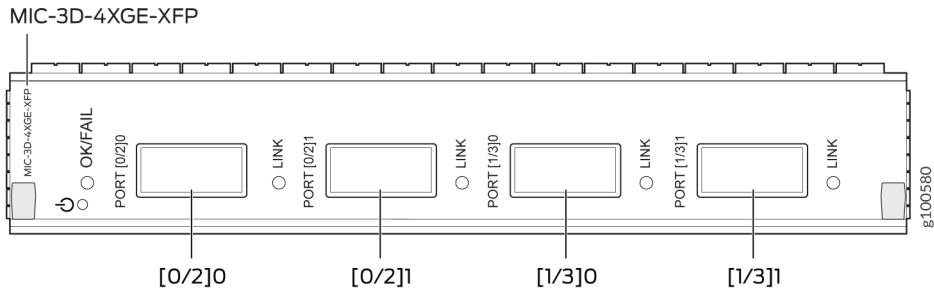


RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

10-Gigabit Ethernet MIC with SFP+ (10 Ports)

Figure 29: 10-Gigabit Ethernet MIC with SFP+

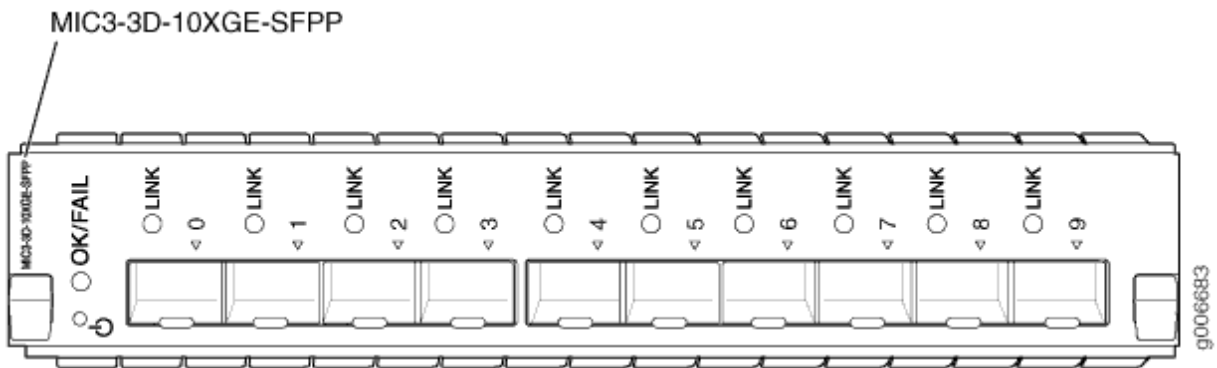

Software release • Junos 12.3 and later

Description	<ul style="list-style-type: none">• Ten 10-Gigabit Ethernet ports• Power requirement: 0.62 A @ 48 V (29.8 W)• Weight: 1.54 lb (0.70 kg)• Model number: MIC3-3D-10XGE-SFPP• Name in the CLI: 3D 10xGE SFPP
Hardware features	<ul style="list-style-type: none">• High-performance throughput on each port at speeds up to 10 Gbps• Supports 10 SFP+ pluggable optic ports• Voltage Sequencer for local voltage sequence control and monitoring• LAN-PHY mode at 10.3125 Gbps• WAN-PHY mode at 9.95328 Gbps• Maximum transmission units (MTUs) of up to 9192 bytes
Software features	<ul style="list-style-type: none">• Configurable LAN-PHY and WAN-PHY mode options per port• Synchronous Ethernet support• Optical diagnostics and related alarms• Virtual Router Redundancy Protocol (VRRP) support• IEEE 802.1Q virtual LANs (VLANs) support• Remote monitoring (RMON) EtherStats• Source MAC learning• MAC accounting and policing—Dynamic local address learning of source MAC addresses• Flexible Ethernet encapsulation• Multiple tag protocol identifiers (TPID)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: SFPP-10GE-ZR has a commercial temperature rating and is not NEBS compliant when plugged into the 10-Gigabit Ethernet MIC with SFP+. If the ambient air temperature exceeds 40 degrees C, the software disables the transmitter, which takes the optical transceiver offline.

NOTE: SFPP-10G-DT-ZRC2 is not NEBS compliant when plugged into the MIC3-3D-10XGE-SFPP MIC. If the ambient air temperature exceeds 40 degrees C, Junos OS disables the transmitter, which takes the optical transceiver offline.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

LINK LED, one per SFP+ port:

- Off—No link.
- Green—Link is up.
- Yellow—Link is disabled.

The ports are labeled:

- **Port [0] to Port [9]**

NOTE: The MIC3-3D-10XGE-SFPP MIC has one logical PIC. When the MIC is installed in slot 0 of an MPC the PIC number is 0, and when the MIC is installed in slot 1 of an MPC the PIC number is 2. For example, when the MIC is installed in slot 3 of the MX960 router, in slot 1 of the MPC, the interfaces are numbered xe-3/2/0 through xe-3/2/9.


RELATED DOCUMENTATION

[MX Series MIC Overview | 26](#)

[MICs Supported by MX Series Routers | 27](#)

[MIC/MPC Compatibility | 45](#)

10-Gigabit Ethernet MIC with SFP+ (24 Ports)

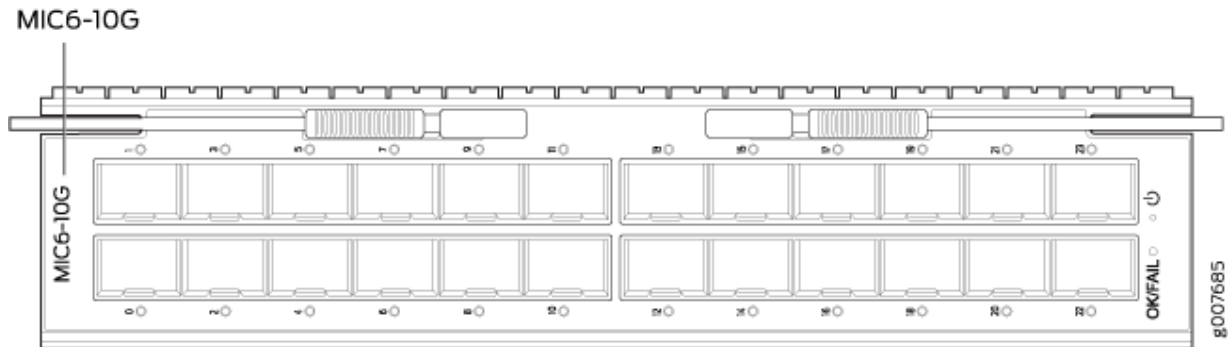

Software release

- Junos 13.3R2 and later

For information about which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information about which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- Twenty-four 10-Gigabit Ethernet ports
- Power requirement: 7.1 A @ 10.4 V (74 W)
- Weight: 3.2 lb (1.45 kg)
- Model number: MIC6-10G
- Name in the CLI: 24x10GE SFPP

- Hardware features
- Supports 24 SFP+ pluggable optic ports
 - High-performance throughput on each port at speeds up to 10 Gbps
 - LAN-PHY mode at 10.3125 Gbps
 - WAN-PHY mode at 9.95328 Gbps
 - Supports LOS-squelch, enabling Synchronous Ethernet fast-clock-failover on a port down event
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Configurable LAN-PHY and WAN-PHY mode options per port
 - Compliant to ITU-T specifications
 - Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - IEEE 802.1ad support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - In-service software upgrade (Unified ISSU)
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Yellow—MIC is coming online.
- Red—MIC has failed.

LINK LED, one bicolor per SFP+ port:

- Off—No link.
- Green—Link is up.
- Yellow—Link is disabled.

The ports are labeled:


- Port **[0]** to Port **[23]**

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

10-Gigabit Ethernet OTN MIC with SFP+ (24 Ports)

MIC6-10G-OTN

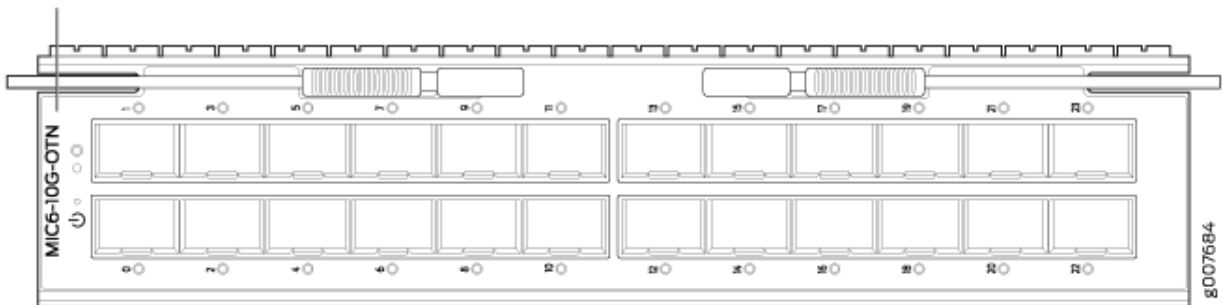

- Software release
- Junos 13.3R3 and later
- For information about which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information about which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.
-

- Description
- Twenty-four 10-Gigabit optical transport network (OTN) ports for transport of 10-Gigabit Ethernet (10GBASE-R) traffic
 - Power requirement: 1.5 A @ 52 V (84 W)
 - Weight: 3.4 lb (1.54 kg)
 - Model number: MIC6-10G-OTN
 - Name in the CLI: 24x10GE OTN
-

- Hardware features
- High-performance throughput on each port at speeds up to 10 Gbps
 - LAN-OTU2e mode (G.Sup43, 7.1) at 11.09 Gbps
 - WAN-OTU2 mode (G.Sup43, 6.1) at 10.70 Gbps
 - Supports LOS-squelch, enabling Synchronous Ethernet fast-clock-failover on a port-down event
 - Provides IEEE 1588 time-stamping at physical interface for improved accuracy
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- OTN support for 10-Gigabit Ethernet interface
 - Compliant with ITU-T specifications
 - Transparent transport of 10-Gigabit Ethernet signals with optical channel transport unit 2 (OTU2/OTU2e) framing
 - Optical diagnostics and related alarms
 - Configurable LAN-PHY, WAN-PHY, or OTN mode options per port
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q VLAN support
 - IEEE 802.1ad support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - In-service software upgrade (Unified ISSU)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Yellow—MIC is coming online.
- Red—MIC has failed.

LINK LED, one bicolor per port:

- Off—No link.
- Green—Link is up.
- Yellow—Link is disabled.

The ports are labeled:


- Port [0] through Port [23]

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

40-Gigabit Ethernet MIC with QSFP+

Figure 30: 40-Gigabit Ethernet MIC with QSFP+

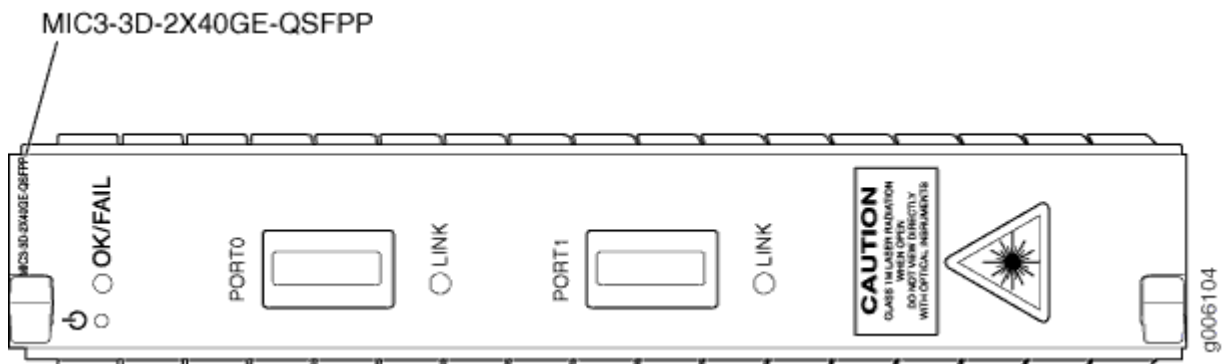

Software release

- 12.2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- Two 40-Gigabit Ethernet ports
 - Power requirement: 0.38 A @ 48 V (18 W)
 - Weight: 1.19 lb (0.54 kg)
 - Model number: MIC3-3D-2X40GE-QSFPP
-

Hardware features

- High-performance throughput on each port at speeds up to 40 Gbps
 - Up to 40-Gbps of full-duplex traffic
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

Software features

- Synchronous Ethernet support
 - Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

LINK LED, one green per port:

- Off—No link.
- On steadily—Link is up with or without activity.
- Yellow—Link is disabled.

The ports are labeled:


- PORT [0] - PORT [1]
-

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

100-Gigabit Ethernet MIC with CFP

Figure 31: 1-Port 100 Gigabit Ethernet MIC with CFP

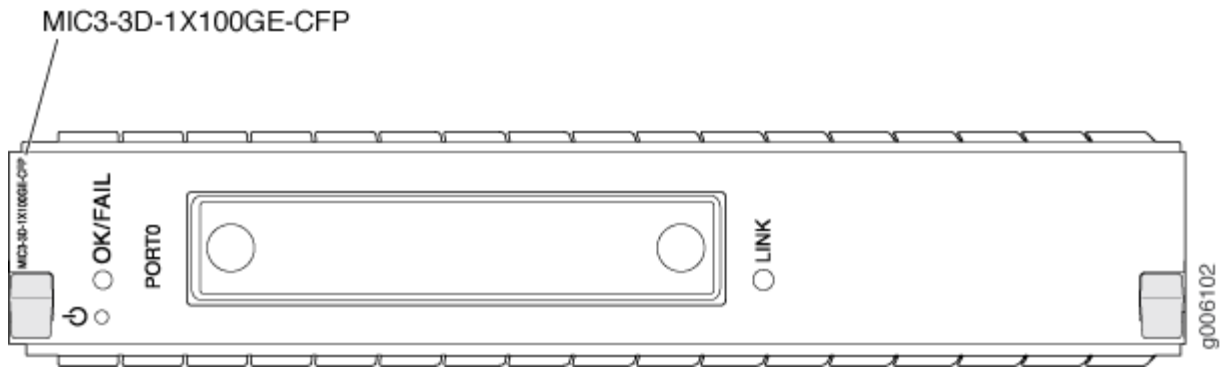

Software release

- 12.1 and later

For information about which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information about which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- One 100-Gigabit Ethernet port
- Power requirement: 0.83 A @ 48 V (40 W)
- Weight: 1.94 lb (0.88 kg)
- Model number: MIC3-3D-1X100GE-CFP
- Name in the CLI: 1X100GE CFP

Hardware features

- High-performance throughput on each port at speeds up to 100 Gbps
- Up to 100-Gbps of full-duplex traffic
- Maximum transmission units (MTUs) of up to 9192 bytes
- The port is labeled **PORT0**

- Software features
- Synchronous Ethernet support
 - Optical diagnostics and related alarms
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: The CFP-100GBASE-ER4 transceiver is NEBS-compliant in the 100-Gigabit Ethernet MIC with CFP, but only when the other MIC slot in the MPC3E is empty. If another MIC is present and the ambient temperature exceeds 40 degrees C, the software converts CFP-100GBASE-ER4 to low power mode, which takes the transceiver offline.

- Fiber-optic 100-Gigabit C form-factor Pluggable

NOTE: The CFP-100GBASE-ZR transceiver is NEBS compliant in the 100-Gigabit Ethernet MIC with CFP, but only when the other MIC slot in the MPC3E is empty. If another MIC is present and the ambient air temperature exceeds 40 degrees C, the software disables the transmitter, which takes the optical transceiver offline. The other MIC slot must be filled with a blank panel.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

LINK LED, one green per port:


- Off—No link.
- On steadily—Link is up.
- Yellow—Link is disabled.

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

100-Gigabit Ethernet MIC with CXP

Figure 32: 100-Gigabit Ethernet MIC with CXP

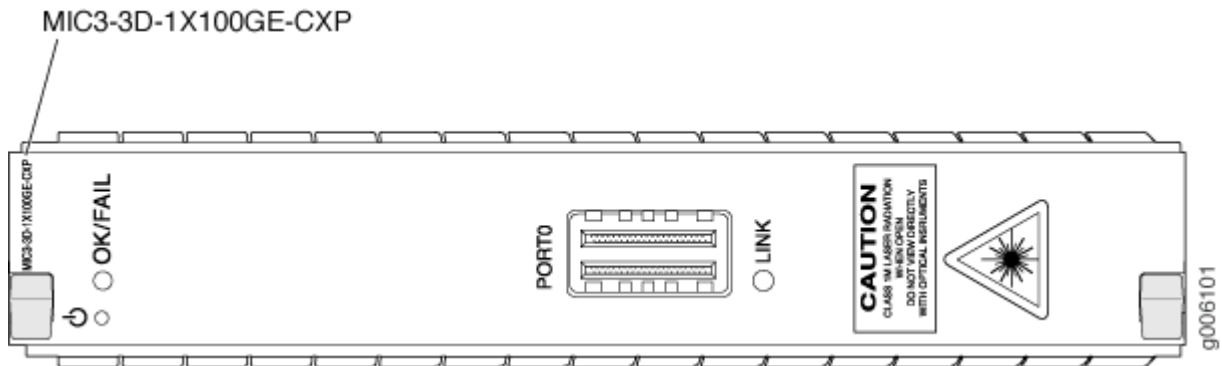

Software release

- 12.2 and later

For information about which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information about which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- One 100-gigabit Ethernet port
- Power requirement: 0.42 A @ 48 V (20 W)
- Weight: 1.03 lb (0.47 kg)
- Model number: MIC3-3D-1X100GE-CXP
- Name in the CLI: 3D 1x100GE CXP

Hardware features

- High-performance throughput on each port at speeds up to 100 Gbps
- Up to 100-Gbps of full-duplex traffic
- Maximum transmission units (MTUs) of up to 9192 bytes
- The port is labeled **PORT0**

Software features

- Synchronous Ethernet support
- Optical diagnostics and related alarms
- Virtual Router Redundancy Protocol (VRRP) support
- IEEE 802.1Q virtual LANs (VLANs) support
- Remote monitoring (RMON) EtherStats
- Source MAC learning
- MAC accounting and policing—Dynamic local address learning of source MAC addresses
- Flexible Ethernet encapsulation
- Multiple tag protocol identifiers (TPID)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.


LINK LED, one green per port:

- Off—No link.
- On steadily—Link is up with or without activity.
- Yellow—Link is disabled.

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

100-Gigabit Ethernet MIC with CXP (4 Ports)

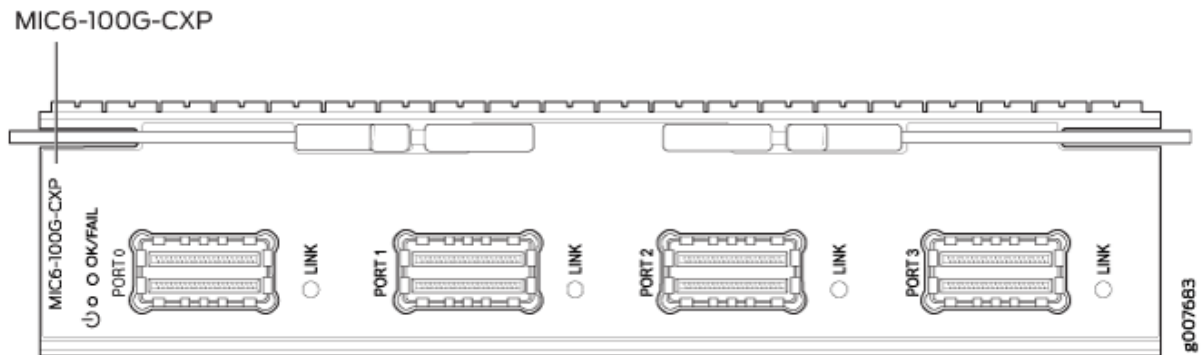

Software release

- Junos 13.3R2 and later

For information about which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information about which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description	<ul style="list-style-type: none">• Four 100-Gigabit Ethernet ports• Power requirement: 5.5 A @ 10.4 V (57 W)• Weight: 2.7 lb (1.22 kg)• Model number: MIC6-100G-CXP• Name in the CLI: 4X100GE CXP
Hardware features	<ul style="list-style-type: none">• Line-rate throughput of up to 100Gbps per port.• Supports 100GBASE-SR10 over CXP pluggable optics• Supports LOS-squelch, enabling Synchronous Ethernet fast-clock-failover on a port down event• Maximum transmission units (MTUs) of up to 9192 bytes
Software features	<ul style="list-style-type: none">• Compliant to ITU-T specifications• Optical diagnostics and related alarms• Virtual Router Redundancy Protocol (VRRP) support• IEEE 802.1Q virtual LANs (VLANs) support• IEEE 802.1ad support• Remote monitoring (RMON) EtherStats• Source MAC learning• MAC accounting and policing—Dynamic local address learning of source MAC addresses• In-service software upgrade (Unified ISSU)
Cables and connectors	<p>TIP: You can use the Hardware Compatibility Tool to find information about the pluggable transceivers supported on your Juniper Networks device.</p> <p>The list of supported transceivers for the MX Series is located at https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series.</p>

LEDs

OK/FAIL LED, one tricolor:

- Green—MIC is functioning normally.
- Yellow—MIC is coming online.
- Red—MIC has failed.

LINK LED, one bicolor per port:

- Off—No link.
- Green—Link is up.
- Yellow—Link is disabled.


The ports are labeled:

- **Port 0** to **Port 3**

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

100-Gigabit Ethernet MIC with CFP2

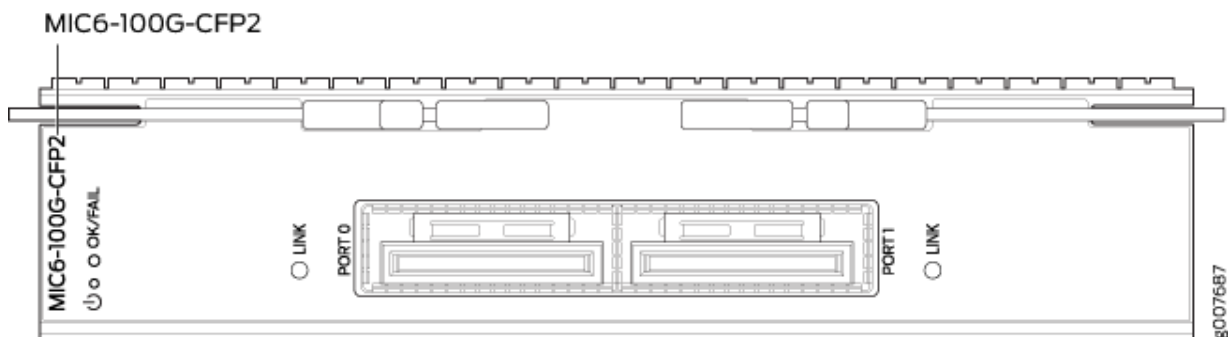

Software release

- Junos 13.3R3 and later

For information about which MPCs support this MIC, see *MIC/MPC Compatibility*. For information about which MICs are supported on MX Series routers, see *MICs Supported by MX Series Routers*.

Description

- Two 100-Gigabit Ethernet CFP2 ports
- Power requirement: 2 A @ 52 V (104 W)
- Weight: 2.4 lb (1.09 kg)
- Model number: MIC6-100G-CFP2
- Name in the CLI: 2X100GE CFP2 OTN

Hardware features

- Line-rate throughput of up to 100 Gbps per port
- Supports CFP2 pluggable optics
- Supports LAN (103.125 Gbps) and OTN/OTU4 (111.81 Gbps) on a per-port basis
- Provides IEEE 1588 time-stamping at physical interface for improved accuracy
- Maximum transmission units (MTUs) of up to 9192 bytes

- Software features
- Optical transport network (OTN) support for 100-Gigabit Ethernet interfaces
 - Compliant with ITU-T specifications
 - Transparent transport of 100-Gigabit Ethernet signals with OTU4 framing
 - Optical diagnostics and related alarms
 - Configurable 100-Gigabit Ethernet or OTN options per port
 - Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q VLAN support
 - IEEE 802.1ad support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - In-service software upgrade (Unified ISSU)
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE:

- CFP2-100G-ER4-D is not NEBS compliant on the MX960 router in FPC slot 0 or FPC slot 11.
- CFP2-DCO-T-WDM-1 is not NEBS compliant on the MX960 router or the MX2020 router in FPC slot 0 or FPC slot 11. Slots **0** and **11** can only work with an ambient temperature of up to 40° C.

NOTE: When inserting the CFP2 transceiver, ensure that the transceiver sits tightly in the port. You will hear a distinct click sound when the latch locks into the corresponding port. The latch must be fully engaged in the corresponding port for the CFP2 transceiver to function properly. Failing to do so will result in loss of connection.

To verify that the CFP2 transceiver module is inserted properly, give a gentle pull by grasping the sides of the module. The module should sit tightly.

LEDs

OK/FAIL LED, one tricolor:

- Green—MIC is functioning normally.
- Yellow—MIC is coming online.
- Red—MIC has failed.

LINK LED, one bicolor per port:

- Off—No link.
- Green—Link is up.
- Yellow—Link is disabled.

Port labels:

- **Port 0** and **Port 1**

RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

100-Gigabit DWDM OTN MIC with CFP2-ACO

MIC3-100G-DWDM



Software release

- Junos OS Release 15.1F5 and 15.1F6, Junos OS Release 17.1R1 and later

For information about which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information about which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- One 100-Gigabit DWDM OTN port
- Power requirements (including transceiver) at different temperatures:
 - 55° C: 1.90 A @ 48 V (91 W)
 - 25° C: 1.73 A @ 48 V (83 W)
- Weight: 2.3 lb (1.04 kg)
- Model number: MIC3-100G-DWDM
- Name in the CLI: 1X100GE DWDM CFP2-ACO

Hardware features

- Dual-wide MIC that installs into two MIC slots
- Supports CFP2 analog coherent optics (CFP2-ACO)
- Transparent transport of a 100-Gigabit Ethernet signal with OTU4V framing
- ITU-standard OTN performance monitoring and alarm management
- Dual-polarization quadrature phase shift keying (DP-QPSK) modulation
- Supports three types of forward error correction (FEC):
 - Soft-decision FEC (SD-FEC)
 - High-gain FEC (HG-FEC)
 - G.709 FEC (GFEC)
- 100 channels on C-band ITU grid with 50-GHz spacing
- Latency:
 - SD-FEC: 14 μ s (TX + RX)
 - HG-FEC: 22 μ s (TX + RX)
 - GFEC: 6 μ s (TX + RX)
- Interoperable with the CFP-100GBASE-ZR transceiver supported on the 100-Gigabit Ethernet MIC with CFP (MIC3-3D-1X100GE-CFP) on MX Series routers and the 100-Gigabit Ethernet PIC with CFP (P1-PTX-2-100GE-CFP) on PTX Series routers.
- Interoperable with the 100-Gigabit DWDM OTN PIC with CFP2 (PTX-5-100G-WDM) on PTX Series routers when the 100-Gigabit DWDM OTN MIC is configured to use SD-FEC or GFEC.

NOTE: The 1-port 100-Gigabit DWDM OTN MIC is not directly interoperable with the 2-port 100-Gigabit DWDM OTN PIC (P1-PTX-2-100G-WDM), but they can both operate over the same DWDM line system.

Software features **NOTE:** For information about configuring the MIC, see [Configuring OTN Interfaces on MIC3-100G-DWDM MIC](#). For information about upgrading the firmware on the PIC, see [Upgrading Firmware on the 100-Gigabit DWDM OTN MIC \(MIC3-100G-DWDM\)](#) .

- Compliant with ITU G.709 and G.798
- Provides a transport interface and state model (GR-1093)
- Performance monitoring features such as alarms, threshold-crossing alarms, OTU/ODU error seconds and FEC and bit error rate (BER) statistics
- SNMP management of the MIC based on *RFC 3591, Managed Objects for the Optical Interface Type*, including the following:
 - Set functionality
 - Black Link MIB
 - IFOTN MIB
 - Optics MIB
 - FRU MIB
- Pre-FEC BER monitoring provides interrupt-driven, BER-based detection of link signal degradation for MPLS fast reroute.
- User-configurable optics options:
 - Transmit (TX) laser enable and disable
 - TX output power
 - Wavelength
 - Receive (RX) LOS warning or alarm thresholds
 - Threshold crossing alarms (TCAs)

User-configurable card options:

- FEC mode (SD-FEC, HG-FEC, or GFEC)
 - TCAs
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: When inserting the C form-factor pluggable 2 (CFP2) transceiver, ensure that the transceiver sits tightly in the port. You hear a distinct click sound when the latch locks into the corresponding port. The latch must be fully engaged in the corresponding port for the CFP2 transceiver to function properly. Failing to do so can result in loss of connection.

To verify that the CFP2 transceiver module is inserted properly, give a gentle pull by grasping the sides of the module. The module should sit tightly.

LEDs

OK/FAIL LED, one bicolor:

- Off—MIC is powered off.
- Green—MIC is initialized and online, functioning normally.
- Amber—MIC is coming online, or is in fault state.

LINK LED, one bicolor per port:

- Off—Port is offline.
- Solid green—Link is up.
- Red—Port failure is detected.

NOTE: The port is labeled **Port 0**.

Alarms, Errors, and Events

NOTE: For OTN alarms, see [Table 28 on page 297](#).

Chassis and MIC:

- MIC (FRU) inserted or removed
- MIC (FRU) Administrative State: In Service, Out Of Service
- MIC (FRU) Operational State: Unequipped, Init, Normal, Mismatch, Fault, Upgrade
- Mismatch equipment
- Temperature alarm

Port (interface):

- Interface Administrative State: In Service, Out Of Service, Service MA, Out of Service MA
- Interface Operational State: Init, Normal, Fault, Degraded

Optical channel transport unit (OTU) TCAs:

- OTU-TCA-BBE—15-minute background block error TCA
- OTU-TCA-ES—15-minute far-end errored seconds TCA
- OTU-TCA-SES—15-minute severely errored seconds TCA
- OTU-TCA-UAS—15-minute unavailable seconds TCA

Optical channel data unit (ODU) TCAs:

- ODU-TCA-BBE—15-minute background block error TCA
- ODU-TCA-ES—15-minute far-end errored seconds TCA
- ODU-TCA-SES—15-minute severely errored seconds TCA
- ODU-TCA-UAS—15-minute unavailable seconds TCA

TIP: You can view OTU and ODU TCAs by using the `show interfaces transport pm otn operational-mode` CLI command.

NOTE: If you insert an invalid CFP module, the CLI displays unsupported module and a syslog message is generated.

Optics-related status:

- Module temperature
 - Module voltage
 - Module temperature alarm:
 - High alarm
 - Low alarm
 - High warning
 - Low warning
 - Module voltage alarm:
 - High alarm
 - Low alarm
 - High warning
 - Low warning
 - Module not ready alarm
 - Module low power alarm
 - Module initialization incomplete alarm
 - Module fault alarm
 - TX laser disabled alarm
 - RX loss of signal alarm
 - Modem lock state
 - TX output power:
 - Current TX output power
-

- Minimum over PM interval
- Maximum over PM interval
- Average over PM interval
- TX power alarm:
 - High alarm
 - Low alarm
 - High warning
 - Low warning
- RX input power (signal)
- RX input power (total):
 - Current RX input power (total)
 - Minimum over PM interval
 - Maximum over PM interval
 - Average over PM interval
- RX power alarm:
 - High alarm
 - Low alarm
 - High warning
 - Low warning
- RX loss of signal alarm
- Wavelength unlocked alarm

TIP: You can view optics-related status by using the `show interfaces transport pm optics` and `show interfaces diagnostics optics operational-mode` CLI commands.

Network lane receive-related status:

- Chromatic dispersion:
 - Current chromatic dispersion
 - Minimum over PM interval
 - Maximum over PM interval
 - Average over PM interval
 - Differential group delay:
 - Current differential group delay
 - Minimum over PM interval
 - Maximum over PM interval
 - Average over PM interval
 - Q²-factor:
 - Current Q²-factor
 - Minimum over PM interval
 - Maximum over PM interval
 - Average over PM interval
 - Carrier frequency offset
 - Current carrier frequency offset
 - Minimum over PM interval
 - Maximum over PM interval
 - Average over PM interval
 - Signal-to-noise ratio (SNR)
 - Current SNR
 - Minimum over PM interval
-

- Maximum over PM interval
- Average over PM interval

TIP: You can view network lane receive-related status by using the `show interfaces transport pm optics operational-mode` CLI command.

FEC statistics:

- Corrected Errors—the number of bits received that were in error, but corrected.
- Uncorrected Words—the number of FEC codewords received that were uncorrectable.
- Corrected Error Ratio—the number of corrected bits divided by the number of bits received

TIP: You can view FEC statistics by using the `show interfaces interface-name extensive operational-mode` CLI command.

Table 28 on page 297 describes the OTN alarms and defects that can occur on the MIC and the link status when the alarm or defect occurs.

TIP: You can view OTN alarms and defects by using the `show interfaces interface-name extensive operational-mode` CLI command.

Table 28: OTN Alarms and Defects

Category	Alarm	Description	Link Status
OTN	LOS	Loss of signal	Link down
	LOF	Loss of frame	Link down
	LOM	Loss of multiframe	Link down

Table 28: OTN Alarms and Defects (Continued)

Category	Alarm	Description	Link Status
OTN FEC	FEC Degrade (OTU-FEC-DEG)	Forward error correction degraded	Link down if signal degrade or backward FRR thresholds are met
	FEC Excessive (OTU-FEC-EXE)	There are uncorrected words and there are errors in the frame header	Possible link down
OTN OTU	OTU-AIS	Alarm indication signal or all ones signal	Link down
	OTU-BDI	Backward defect identification	Link down
	OTU-IAE	Incoming alignment error	Warning
	OTU-TTIM	Destination access point identifier (DAPI), source access point identifier (SAPI), or both mismatch from expected to received	Can cause the link to be down if <code>otu-ttim-act-enable</code> is configured at the <code>[edit interfaces <i>interface-name</i> otn-options]hierarchy level</code>
	OTU-BIAE	Backward incoming alignment error	Warning
	OTU-TSF	OTU trail signal fail	Warning
	OTU-SSF	OTU server signal fail	Warning
OTN ODU	ODU-AIS	Alarm indication signal or all ones signal	Link down

Table 28: OTN Alarms and Defects (Continued)

Category	Alarm	Description	Link Status
	ODU-OCI	Open connection error	Link down
	ODU-LCK	ODU lock triggers for path monitoring and TCM levels 1 through 6	Link down
	ODU-BDI	Backward defect indication	Link down
	ODU-TTIM	DAPI or SAPI mismatch from expected to received	Can cause the link to be down if <code>odu-ttim-act-enable</code> is configured at the <code>[edit interfaces interface-name otn-options]</code> hierarchy level
	ODU-IAE	Incoming alignment error	Warning
	ODU-LTC	Loss of tandem connection	Warning
	ODU-CSF	Client signal failure	Warning
	ODU-TSF	Trail signal fail	Warning
	ODU-SSF	Server signal fail	Warning
	ODU-PTIM	Payload type mismatch	Link down

RELATED DOCUMENTATION

100-Gigabit DWDM OTN CFP2-ACO Transceiver Wavelengths

[MX Series MIC Overview](#) | 26

[Configuring OTN Interfaces on MIC3-100G-DWDM MIC](#)

[Upgrading Firmware on the 100-Gigabit DWDM OTN MIC \(MIC3-100G-DWDM\)](#)

show interfaces extensive

show interfaces transport pm

show interfaces diagnostics optics (Gigabit Ethernet, 10-Gigabit Ethernet, 40-Gigabit Ethernet, 100-Gigabit Ethernet, and Virtual Chassis Port)

Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP

Figure 33: 4-Port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP



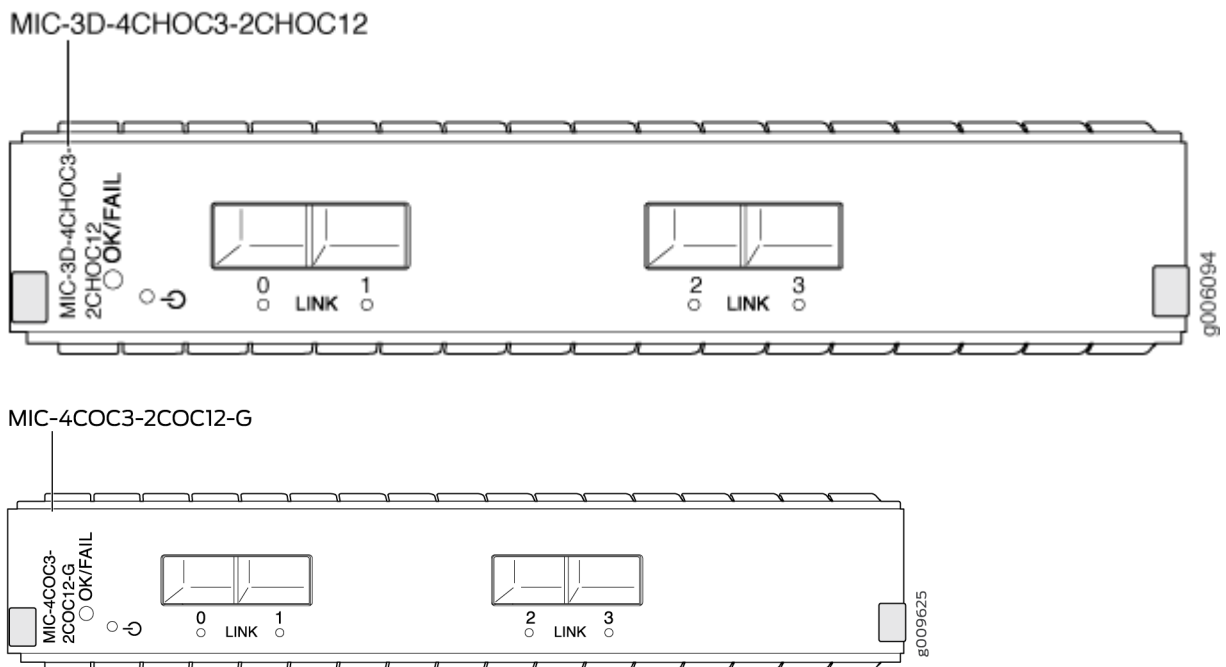


Figure 34: 8-Port Channelized SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP

MIC-3D-8CHOC3-4CHOC12

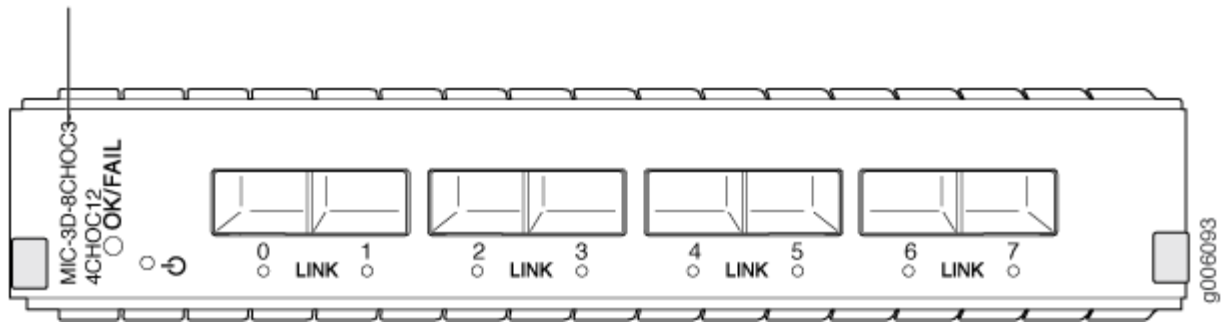

MIC-8COC3-4COC12-G

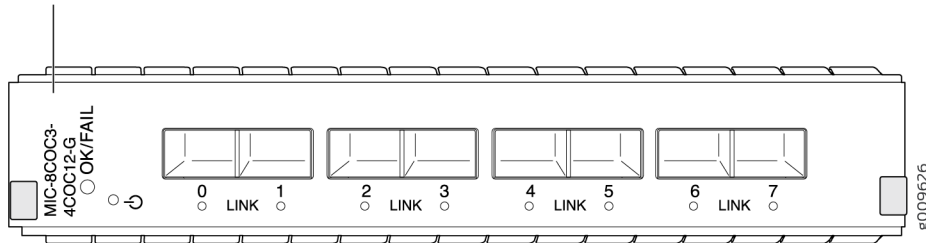

Software release • Junos OS Release 11.4 and later

For information on which MPCs support these MICs, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

Description

- 4-port: Rate-selectable using one of the following rates:
 - 4-port OC3/STM1
 - 2-port OC12/STM4
- 8-port: Rate-selectable using one of the following rates:
 - 8-port OC3/STM1
 - 4-port OC12/STM4
- Channelization: OC3, DS3, DS1, DS0, E3, E1. For information on channelization numbers, see [Channelized Interfaces User Guide for Routing Devices](#).
- Power requirement:
 - 4-port: 4.56 A @ 9 V (41 W)
 - 8-port: 5.78 A @ 9 V (52 W)
- Weight:
 - 4-port: 4.4 lb (2 kg)
 - 8-port: 4.4 lb (2 kg)
- Model number:
 - 4-port: MIC-3D-4CHOC3-2CHOC12
 - 4-port: MIC-4COC3-2COC12-G
 - 8-port: MIC-3D-8CHOC3-4CHOC12
 - 4-port: MIC-4COC3-2COC12-G
 - 8-port: MIC-3D-8CHOC3-4CHOC12
 - 8-port: MIC-8COC3-4COC12-G

NOTE: MIC-4COC3-2COC12-G and MIC-8COC3-4COC12-G are RoHS 6/6 compliant.

- Hardware features
- The ports are labeled:
 - 4-port: 0-3
 - 8-port: 0-7
-

- Software features
- Maximum transmission units (MTUs) of up to 9192 bytes
 - Per-port SONET/SDH framing
 - Local and remote loopback on each port
 - Optical diagnostics and monitoring
 - Clocking options: internal or external/loop mode
 - Encapsulations:
 - MPLS fast reroute
 - MPLS CCC (circuit cross-connection)
 - MPLS TCC (translational cross-connection)
 - Cisco High-Level Data Link Control (cHDLC)
 - Cisco HDLC CCC
 - Cisco HDLC TCC
 - Point-to-Point Protocol (PPP)
 - PPP for CCC
 - PPP for TCC
 - Flexible Frame Relay
 - Frame Relay
 - Frame Relay for CCC
 - Frame Relay for TCC
 - PPP over Frame Relay
 - Multilink-based protocols (Junos OS Release 12.1 and later):
 - Multilink Point-to-Point Protocol (MLPPP)
 - Multiclass MLPPP
-

- Multilink Frame Relay (MLFR) end-to-end (FRF.15)
- Multilink Frame Relay (MLFR) UNI NNI (FRF.16, also referred to as MFR)
- Compressed Real-Time Transport Protocol (CRTTP)

NOTE: When you configure multilink services on a MIC in an MX Series router, ensure that a Multiservices DPC is present in the same router.

NOTE: Ethernet over Frame Relay is not supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

LINK LED, one green per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

SONET alarms:

- Loss of light (LOL)
- Loss of signal (LOS)
- Loss of frame (LOF)
- Phase lock loop (PLL)
- Severely errored frame (SEF)
- Alarm indicator signal-line (AIS-L)
- Alarm indicator signal-path (AIS-P)
- Remote defect indicator-line (RDI-L)
- Remote defect indicator-path (RDI-P)
- Loss of pointer-path (LOP-P)
- Bit error rate-signal degrade (BERR-SD)
- Bit error rate-signal fail (BERR-SF)
- Payload label mismatch-Path (PLM-P)
- Unequipped-path (UNEQ-P)
- Remote error indicator-path (REI-P)
- Alarm indicator signal-virtual container (V-AIS)
- Loss of pointer-virtual container (V-LOP)
- Remote defect indicator-virtual container (V-RDI)
- Unequipped-virtual container (V-UNEQ)
- Mismatch-virtual container (V-MIS)

SDH alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)

- Loss of frame (LOF)
- Loss of signal (LOS)
- Severely errored frame (SEF)
- Multiplex-section alarm indicator signal (MS-AIS)
- Higher order path-alarm indication signal (HP-AIS)
- Loss of pointer (LOP)
- Bit error rate-signal degrade (BER-SD)
- Bit error rate-signal fail (BER-SF)
- Multiplex section-far end receive failure (MS-FERF)
- Higher order path-far-end receive failure (HP-FERF)
- Higher order path-payload label mismatch (HP-PLM)
- Remote error indicator (REI)
- Unequipped (UNEQ)
- Tributary unit-alarm indicator signal (TU-AIS)
- Tributary unit-loss of pointer (TU-LOP)
- Tributary unit-remote defect indicator (TU-RDI)
- Tributary unit-unequipped (TU-UNEQ)
- Tributary unit-mismatch (TU-MIS)

DS3 alarms:

- Alarm indication signal (AIS)
- Loss of frame (LOF)
- Loss of signal seconds (LOS)
- Phase lock loop (PLL)

DS3 error detection:


- C-bit code violations (CCV)
 - C-bit errored seconds (CES)
 - C-bit severely errored seconds (CSES)
 - CRC errors
 - Excessive zeros (EXZ)
 - Far-end block error (FEBE)
 - Far-end receive failure (FERF)
 - Line errored seconds (LES)
 - Parity bit (P-bit) code violations (PCV)
 - Parity bit (P-bit) errored seconds (PES)
 - Parity bit (P-bit) severely errored framing seconds (PSES)
 - Severely errored framing seconds (SEFS)
 - Unavailable seconds (UAS)
-

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP

Figure 35: Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP

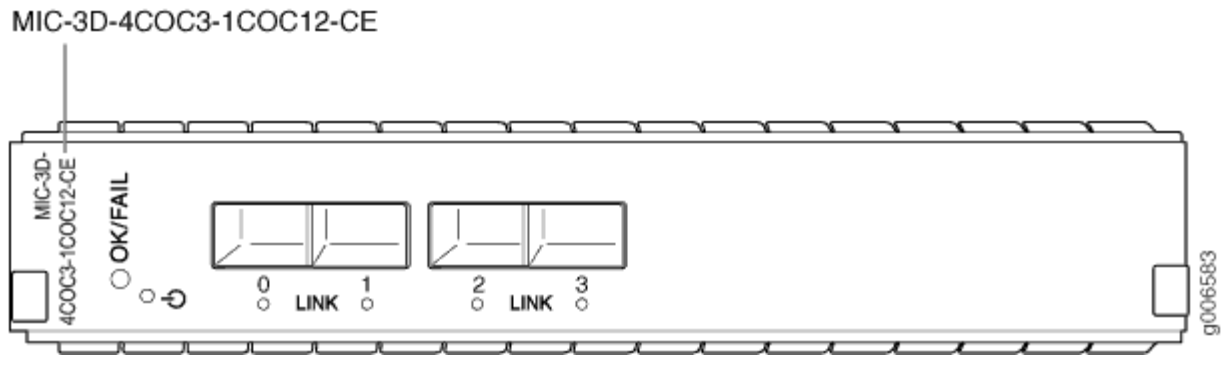

Software release

- Junos OS Release 12.2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

- Description
- Four OC3/STM1 ports
 - Rate-selectable using one of the following rates:
 - 4-port OC3/STM1
 - 1-port OC12/STM4
 - One channelized OC12/STM4 port (down to DS0)
 - SONET or SDH is configurable on a MIC level
 - OC3 channelization:
 - 4 OC3 channel
 - 336 DS1 channels
 - 2016 DS0 channels (combination of nxDS0)
 - SDH channelization:
 - 4 STM1 channel
 - 252 E1 channels
 - 2016 DS0 channels (combination of nxDS0)
 - Power requirement: 2.83 A @ 12 V (33.96 W)
 - Weight: 1.63 lb (0.74 kg)
 - Model number: MIC-3D-4COC3-1COC12-CE

-
- Hardware features
- Ports are numbered 0 through 3
-

- Software features
- Per-MIC SONET/SDH framing
 - Internal and loop clocking
 - Encapsulations:
 - Pseudo Wire Emulation Edge-to-Edge (PWE3) Architecture (RFC 3985)
 - Requirements for Pseudo-Wire Emulation Edge-to-Edge (PWE3) (RFC 3916)
 - Structure-Agnostic Time Division Multiplexing (TDM) over Packet (SAToP) (RFC 4553)
 - Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet Switched Network (CESoPSN) (RFC 5086)
 - Pseudowire Emulation Edge-to-Edge (PWE3) Control Word for Use over an MPLS PSN (RFC 4385)
 - L2 Network Interconnections (protocol stitching):
 - TDM LDP PWs to BGP L2VPN—see *Using the Layer 2 Interworking Interface to Interconnect a Layer 2 Circuit to a Layer 2 VPN* for more information. Note that stitching CESoPSN PW to BGP L2VPN is not supported.
 - Unified in-service software upgrade (unified ISSU)

Interfaces

Syntax: *mediatype-fpc/pic/port* where:

- mediatype: coc3, coc12, cstm1, cstm4, or ds
- fpc: Slot in the router where the MPC is installed
- pic: 0 when installed in MIC slot 0 or 2 when installed in MIC slot 1
- port: 0 through 3

For example, *cstm4-1/2/0* is the channelized STM4 interface for port 0 on the MIC installed in MIC slot 1 on an MPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a MIC is not being actively used with any valid links, take the MIC offline until you are ready to establish a link to another device. For information about taking a MIC offline, see the request chassis pic offline command in the *Junos OS System Basics and Services Command Reference*.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

LINK LED, one tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

Structure-agnostic alarms for T1 and E1 interface:

- Alarm indication signal (AIS)
- Loss of signal (LOS)
- Line code violation (LCV)
- Errored seconds (ES)
- Line-errored seconds (LES)
- Severely errored seconds (SES)
- Unavailable errored seconds (UAS)

Structure aware alarms for T1 and E1 interface:

- Severely errored frame (SEF)
- Block error event (BEE)
- Loss of frame (LOF)
- Yellow alarm (remote alarm indication RAI)
- Path code violation (PCV)
- Severely errored frame seconds (SEFS)
- Bursty errored seconds (BES)


RELATED DOCUMENTATION

[MX Series MIC Overview | 26](#)

Using the Layer 2 Interworking Interface to Interconnect a Layer 2 Circuit to a Layer 2 VPN

Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H)

Figure 36: Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP (H)

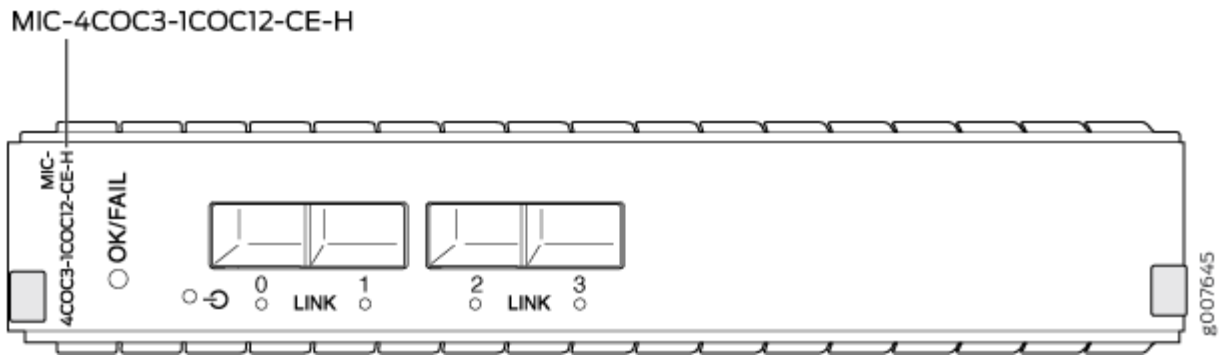

Software release

- Junos OS Release 13.2R2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description	<ul style="list-style-type: none">• Four OC3/STM1 ports• Rate-selectable using one of the following rates:<ul style="list-style-type: none">• 4-port OC3/STM1• 1-port OC12/STM4• One channelized OC12/STM4 port (down to DS0)• SONET or SDH is configurable on a MIC level• SONET channelization:<ul style="list-style-type: none">• 4 OC3 channel• 336 DS1 channels• 2016 DS0 channels (combination of nxDS0)• SDH channelization:<ul style="list-style-type: none">• 4 STM1 channel• 252 E1 channels• 2016 DS0 channels (combination of nxDS0)• Power requirement: 2.83 A @ 12 V (33.96 W)• Weight: 1.63 lb (0.74 kg)• Model number: MIC-4COC3-1COC12-CE-H
Hardware features	<ul style="list-style-type: none">• Ports are numbered 0 through 3• Environmentally hardened for -40° F (-40° C) to 149° F (65° C) operating temperatures

-
- Software features
- Per-MIC SONET/SDH framing
 - Internal and loop clocking
 - Encapsulations:
 - Pseudo Wire Emulation Edge-to-Edge (PWE3) Architecture (RFC 3985)
 - Requirements for Pseudo-Wire Emulation Edge-to-Edge (PWE3) (RFC 3916)
 - Structure-Agnostic Time Division Multiplexing (TDM) over Packet (SAToP) (RFC 4553)
 - Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet Switched Network (CESoPSN) (RFC 5086)
 - Pseudowire Emulation Edge-to-Edge (PWE3) Control Word for Use over an MPLS PSN (RFC 4385)

Interfaces

Syntax: *mediatype-fpc/pic/port* where:

- mediatype: coc3, coc12, cstm1, cstm4, or ds
- fpc: Slot in the router where the MPC is installed
- pic: 0 when installed in MIC slot 0 or 2 when installed in MIC slot 1
- port: 0 through 3

For example, *cstm4-1/2/0* is the channelized STM4 interface for port 0 on the MIC installed in MIC slot 1 on an MPC installed in slot 1.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a MIC is not being actively used with any valid links, take the MIC offline until you are ready to establish a link to another device. For information about taking a MIC offline, see the request chassis pic offline command in the *Junos OS System Basics and Services Command Reference*.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

LINK LED, one tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

Structure-agnostic alarms for T1 and E1 interface:

- Alarm indication signal (AIS)
- Loss of signal (LOS)
- Line code violation (LCV)
- Errored seconds (ES)
- Line-errored seconds (LES)
- Severely errored seconds (SES)
- Unavailable errored seconds (UAS)

Structure aware alarms for T1 and E1 interface:


- Severely errored frame (SEF)
- Block error event (BEE)
- Loss of frame (LOF)
- Yellow alarm (remote alarm indication RAI)
- Path code violation (PCV)
- Severely errored frame seconds (SEFS)
- Bursty errored seconds (BES)

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

Channelized E1/T1 Circuit Emulation MIC

Figure 37: Channelized E1/T1 Circuit Emulation MIC

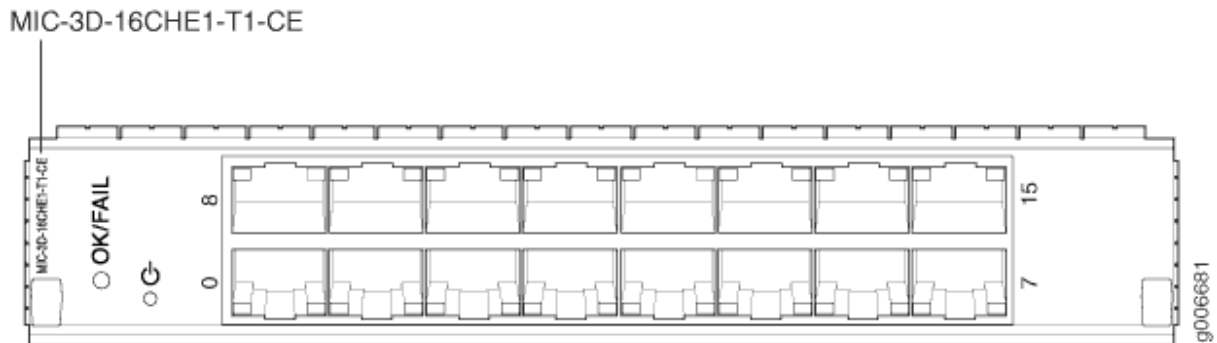

Software release	<ul style="list-style-type: none"> Junos OS Release 12.3 and later <p>For information on which MPCs support this MIC, see "MIC/MPC Compatibility" on page 45. For information on which MICs are supported on MX Series routers, see "MICs Supported by MX Series Routers" on page 27.</p>
Description	<ul style="list-style-type: none"> Sixteen E1 or T1 ports Per-MIC E1/T1 framing DS1 channelization per port: <ul style="list-style-type: none"> 1 DS1 channel 24 DS0 channels E1 channelization per port: <ul style="list-style-type: none"> 1 E1 channel 32 DS0 channels Internal and loop clocking Power requirement: 2.21 A @ 12 V (26.55 W) Weight: 1.57 lb (0.71 kg) Model number: MIC-3D-16CHE1-T1-CE

Hardware features	<ul style="list-style-type: none">• Ports are numbered:<ul style="list-style-type: none">• Top row: 8 and 15 from left to right• Bottom row: 0 and 7 from left to right
Software features	<ul style="list-style-type: none">• Full bit error rate test (BERT)• DS1 and E1 interfaces are selectable on a per-port granularity• Per-port framing is not supported• You can configure the following framing modes using the CLI:<ul style="list-style-type: none">• T1–SF, ESF, D4/superframe, ESF (extended superframe)• E1–G704, G704–no-crc4, unframed• Local, remote, and per-port loopback diagnostics• Encapsulations:<ul style="list-style-type: none">• Pseudowire Emulation Edge to Edge (PWE3) Architecture (RFC 3985)• Requirements for Pseudowire Emulation Edge to Edge (PWE3) (RFC 3916)• Structure-Agnostic Time Division Multiplexing (TDM) over Packet (SAToP) (RFC 4553)• Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet-Switched Network (CESoPSN) (RFC 5086)• Pseudowire Emulation Edge to Edge (PWE3) Control Word for Use over an MPLS PSN (RFC 4385)• In-service software upgrade (Unified ISSU)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- RJ-48 connector

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

One tricolor per port:

- Off—Not enabled.
- Green—Online with no alarms or failures.
- Yellow—Online with alarms for remote failures.
- Red—Active with a local alarm; router has detected a failure.

Alarms, errors, and events

- Structure-agnostic alarms for T1 and E1 interface:
 - Alarm indication signal (AIS)
 - Loss of signal (LOS)
- Structure-aware alarms for T1 and E1 interface:
 - Loss of signal (LOS)
 - Alarm indication signal (AIS)
 - Loss of frame (LOF)
 - Remote alarm indication signal (RAIS)
- Structure-agnostic error detection for T1 and E1 interface:
 - Errored seconds (ES)
 - Line code violation (LCV)
 - Line errored seconds (LES)
 - Severely errored seconds (SES)
 - Unavailable seconds (UAS)
 - Loss of signal seconds (LOSS)
- Structure-aware error detection for T1 and E1 interface:
 - Severely errored frame (SEF)
 - Block error event (BEE)
 - Line code violation (LCV)
 - Path code violation (PCV)
 - Line errored seconds (LES)
 - Errored seconds (ES)
 - Severely errored seconds (SES)
 - Severely errored frame seconds (SEFS)


- Bursty errored seconds (BES)
- Unavailable seconds (UAS)
- Loss of signal seconds (LOSS)
- Loss of framing seconds (LOFS)
- Far-end block error (FEBE) (E1 only)
- CRC errors (E1 only)

RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

Channelized E1/T1 Circuit Emulation MIC (H)

Figure 38: Channelized E1/T1 Circuit Emulation MIC (H)

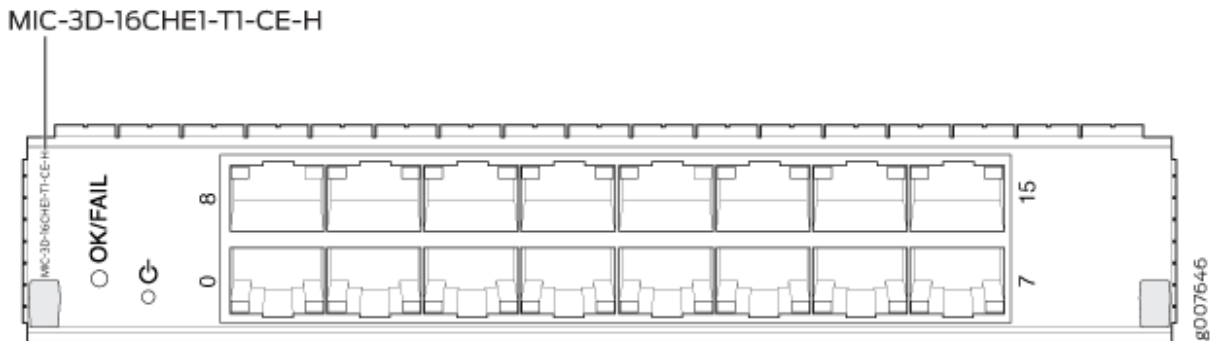

Software release • Junos OS Release 13.2R2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility"](#) on page 45. For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers"](#) on page 27.

Description

- Sixteen E1 or T1 ports
- Per-MIC E1/T1 framing
- DS1 channelization per port:
 - 1 DS1 channel
 - 24 DS0 channels
- E1 channelization per port:
 - 1 E1 channel
 - 32 DS0 channels
- Internal and loop clocking
- Power requirement: 2.21 A @ 12 V (26.55 W)
- Weight: 1.57 lb (0.71 kg)
- Model number: MIC-3D-16CHE1-T1-CE-H

Hardware features

- Ports are numbered:
 - Top row: 8 and 15 from left to right
 - Bottom row: 0 and 7 from left to right
- Environmentally hardened for -40° F (-40° C) to 149° F (65° C) operating temperatures

- Software features
- Full bit error rate test (BERT)
 - DS1 and E1 interfaces are selectable on a per-port granularity
 - Per-port framing is not supported
 - You can configure the following framing modes using the CLI:
 - T1—SF, ESF, D4/superframe, ESF (extended superframe)
 - E1—G704, G704-no-crc4, unframed
 - Local, remote, and per-port loopback diagnostics
 - Encapsulations:
 - Pseudowire Emulation Edge to Edge (PWE3) Architecture (RFC 3985)
 - Requirements for Pseudowire Emulation Edge to Edge (PWE3) (RFC 3916)
 - Structure-Agnostic Time Division Multiplexing (TDM) over Packet (SAToP) (RFC 4553)
 - Structure-Aware Time Division Multiplexed (TDM) Circuit Emulation Service over Packet-Switched Network (CESoPSN) (RFC 5086)
 - Pseudowire Emulation Edge to Edge (PWE3) Control Word for Use over an MPLS PSN (RFC 4385)

Interfaces Syntax: *media-type fpc/pic/port* where:

- media-type: ct1, ds, t1, or e1
- fpc: Slot in the router where the MPC is installed
- pic: 0 when installed in MIC slot 0 or 2 when installed in MIC slot 1
- port: 0 through 15

For example, t1-2/2/0 is the T1 interface for port 0 on the MIC installed in MIC slot 1 on an MPC installed in slot 2.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- RJ-48 connector
-

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

One tricolor per port:

- Off—Not enabled.
 - Green—Online with no alarms or failures.
 - Yellow—Online with alarms for remote failures.
 - Red—Active with a local alarm; router has detected a failure.
-

Alarms, errors, and events

- Structure-agnostic alarms for T1 and E1 interface:
 - Alarm indication signal (AIS)
 - Loss of signal (LOS)
- Structure-aware alarms for T1 and E1 interface:
 - Loss of signal (LOS)
 - Alarm indication signal (AIS)
 - Loss of frame (LOF)
 - Remote alarm indication signal (RAIS)
- Structure-agnostic error detection for T1 and E1 interface:
 - Errored seconds (ES)
 - Line code violation (LCV)
 - Line errored seconds (LES)
 - Severely errored seconds (SES)
 - Unavailable seconds (UAS)
 - Loss of signal seconds (LOSS)
- Structure-aware error detection for T1 and E1 interface:
 - Severely errored frame (SEF)
 - Block error event (BEE)
 - Line code violation (LCV)
 - Path code violation (PCV)
 - Line errored seconds (LES)
 - Errored seconds (ES)
 - Severely errored seconds (SES)
 - Severely errored frame seconds (SEFS)


- Bursty errored seconds (BES)
 - Unavailable seconds (UAS)
 - Loss of signal seconds (LOSS)
 - Loss of framing seconds (LOFS)
 - Far-end block error (FEBE) (E1 only)
 - CRC errors (E1 only)
-

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

Tri-Rate MIC

Figure 39: 40-Port Tri-Rate MIC

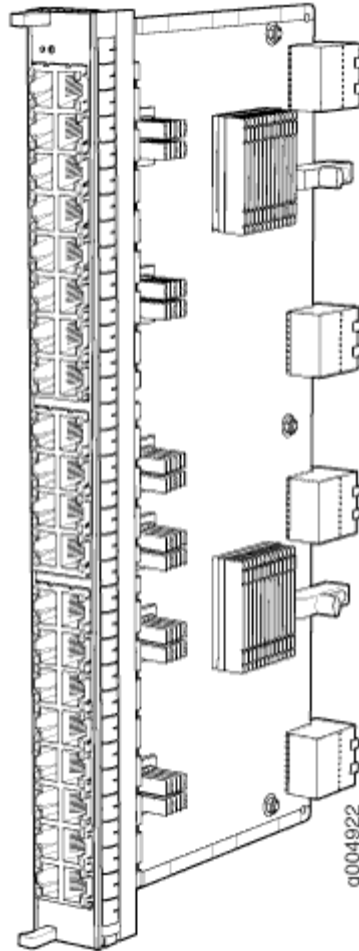

Software release

- Junos 10.2 and later

For information on which MPCs support this MIC, see "[MIC/MPC Compatibility](#)" on page 45. For information on which MICs are supported on MX Series routers, see "[MICs Supported by MX Series Routers](#)" on page 27.

- Description
- 40 autonegotiating 10BASE-T, 100BASE-TX, or 1000BASE-T Megabit Ethernet ports
 - Power requirement: 0.85 A @ 48 V (41 W)
 - Weight: 1.9 lb (0.9 kg)
 - Model number: MIC-3D-40GE-TX
 - Name in the CLI: 3D 40GE TX
-

- Hardware features
- Dual-wide MIC that installs into 2 slots.

For information on how to install dual-wide MICs, see the *Installing Dual-Wide MIC* topic in the respective *MX Series Router Hardware Guide*.
 - High-performance throughput on each port at speeds of 10 Mbps, 100 Mbps, or 1000 Mbps
 - Up to 40-Gbps of full-duplex traffic
 - Autonegotiation between Gigabit Ethernet circuit partners
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Virtual Router Redundancy Protocol (VRRP) support
 - IEEE 802.1Q virtual LANs (VLANs) support
 - Remote monitoring (RMON) EtherStats
 - Source MAC learning
 - MAC accounting and policing—Dynamic local address learning of source MAC addresses
 - Flexible Ethernet encapsulation
 - Multiple tag protocol identifiers (TPID)
-

Interfaces

Syntax: *ge-fpc/pic/port* where:

- *fpc*: Slot in the router where the MPC is installed.
- *pic*: The ports on the MPC are divided into four logical PICs numbered 0, 1, 2, and 3.
- *port*: 0 through 9

For example, *ge-2/3/0* is the interface for port 0 in logical PIC 3 on the MPC installed in slot 2.

[Figure 40 on page 332](#), [Figure 41 on page 333](#), and [Figure 42 on page 333](#) illustrate the port numbering for the Tri-Rate MIC installed in the MX960, MX480, and MX240, respectively.

Cables and connectors

- Connector: Four-pair, Category 5 shielded twisted-pair connectivity through an RJ-45 connector
- Pinout: MDI, MDI crossover
- Maximum distance: 328 ft (100 m)

CAUTION: Do not use RJ-45 cables with strain-relief boots exceeding 1.5 mm from the bottom of the connector. Cable boots that exceed this measurement can damage the port.

LEDs

OK/fail LED, one bicolor:

- Green—MIC is functioning normally.
- Red—MIC has failed.

Link LED, one green per port:

- Off—No link.
 - On steadily—Link is up.
-

Figure 40 on page 332, Figure 41 on page 333, and Figure 42 on page 333 illustrate the port numbering for the Tri-Rate MIC installed in the MX960, MX480, and MX240, respectively.

Figure 40: Port Numbering for the Tri-Rate MIC (MX960)


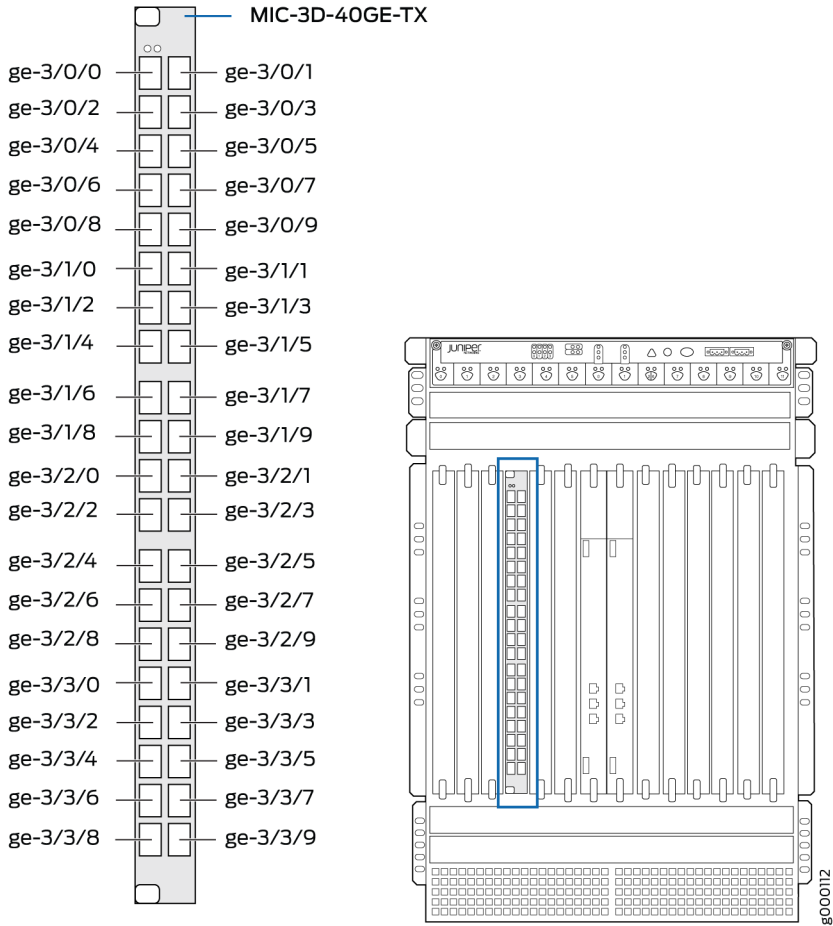


Figure 41: Port Numbering for the Tri-Rate MIC (MX480)

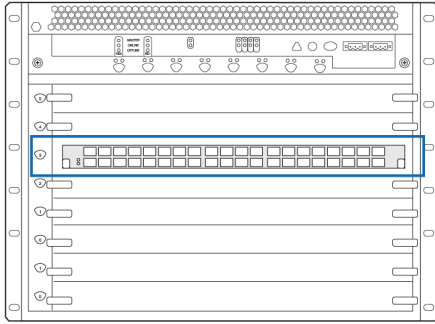

MIC-3D-40GE-TX



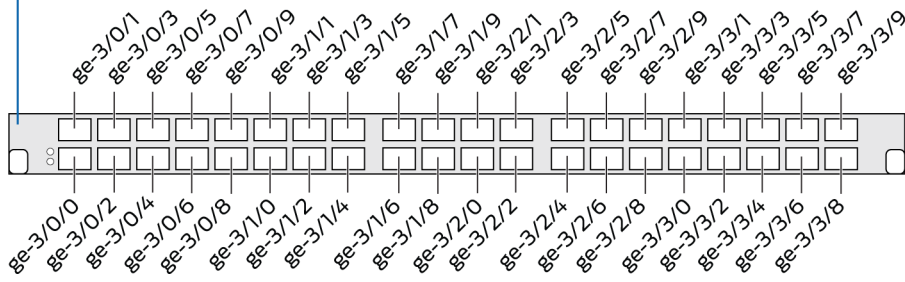


Figure 42: Port Numbering for the Tri-Rate MIC (MX240)

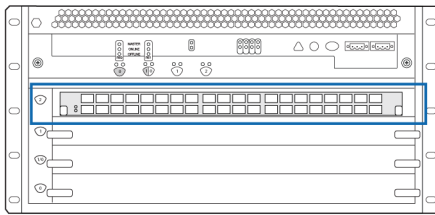

MIC-3D-40GE-TX

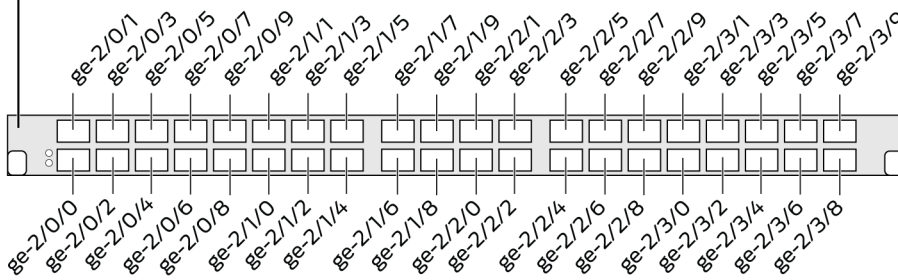


RELATED DOCUMENTATION

[MX Series MIC Overview](#) | 26

MIC MRATE

Figure 43: 12-Port Multi-Rate MIC with QSFP+

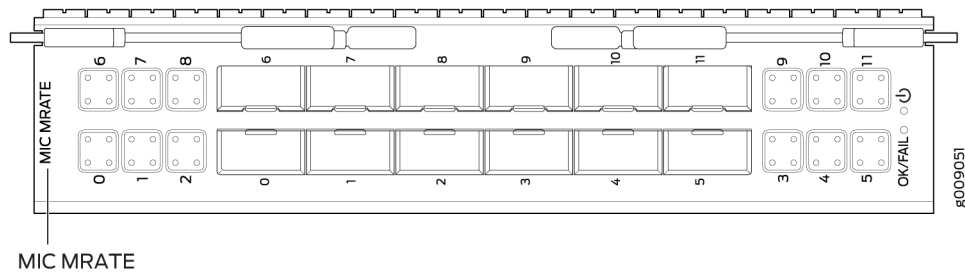

- Software release
- Junos OS Release 15.1F5 with Junos Continuity
 - Junos OS release 16.1R1 and later

For information about which MPCs support this MIC, see [MIC/MPC Compatibility](#). For information about which MICs are supported on MX Series routers, see [MICs Supported by MX Series Routers](#).

- Description
- Twelve Gigabit Ethernet ports that support quad small form-factor pluggable plus (QSFP+) transceivers
 - Power requirement;
 - When installed into MPC8E: 1.250 A @ 48 V (60 W)
 - When installed into MPC9E, or into MPC8E operating in 1.6 Tbps upgrade mode (licensed feature): 1.771 A @ 48 V (85 W)
 - Weight: 3.9 lb (1.77 kg)
 - Model number: MIC-MRATE
 - Name in the CLI: MRATE-12xQSFP+XGE-XLGE-CGE

- Hardware features
- The ports are numbered **0** through **11**.
 - Twelve Gigabit Ethernet QSFP+ ports, each of which can be configured as a 40-Gigabit Ethernet port or as four 10-Gigabit Ethernet ports by using a breakout cable.
 - Eight out of the twelve ports can be configured as 100-Gigabit Ethernet ports. Port numbers **0** through **3**, and **6** through **9** are the eight 100-Gigabit Ethernet ports.
 - When used in MX2K-MPC8E:
 - 4 ports out of the total 12 support 100-Gigabit Ethernet speed
 - Maximum aggregate port capacity across ports **0** through **5** should not exceed 240 Gbps
 - Maximum aggregate port capacity across ports **6** through **11** should not exceed 240 Gbps
 - When used in MX2K-MPC9E:
 - 8 ports out of the total 12 support 100-Gigabit Ethernet speed
 - Maximum aggregate port capacity across ports **0** through **5** should not exceed 400 Gbps
 - Maximum aggregate port capacity across ports **6** through **11** should not exceed 400 Gbps

[Table 29 on page 336](#) lists the configurable Gbps Ethernet port speeds for each port.

-
- Software features
- Supports rate selectability at the port level.
 - By default, the ports are configured as 10-Gigabit Ethernet ports.
 - Supports remote port identification.
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

- **OK/FAIL LED**, one bicolor:
 - Steady green—MIC is functioning normally.
 - Red—MIC has failed.
- **Link LED**, one green per port (4 per QSFP+ cage):
 - Steady green—Link is up.
 - Off—Link is down or disabled.

Each QSFP+ cage contains four LEDs, logically numbered from 0 through 3. These numbers help you identify the corresponding cable when a breakout cable (4x10 Gigabit) is connected to a port. On an installed MRATE MIC, the orientation of these LEDs is as follows: upper left **0**, upper right **1**, lower left **2**, and lower right **3**.

Table 29: MIC MRATE Gigabit Ethernet Port Speed Capabilities

Port #	4x10 Gbps Ethernet	40 Gbps Ethernet	100 Gbps Ethernet
0	yes	yes	yes
1	yes	yes	yes
2	yes	yes	yes
3	yes	yes	yes
4	yes	yes	no

Table 29: MIC MRATE Gigabit Ethernet Port Speed Capabilities (*Continued*)

Port #	4x10 Gbps Ethernet	40 Gbps Ethernet	100 Gbps Ethernet
5	yes	yes	no
6	yes	yes	yes
7	yes	yes	yes
8	yes	yes	yes
9	yes	yes	yes
10	yes	yes	no
11	yes	yes	no

RELATED DOCUMENTATION

[Junos Continuity Software User Guide \(Junos OS Release 14.1R4 and Later Releases\)](#)


Interface Naming Conventions for MIC-MRATE

Port Speed for Routing Devices

Configuring Port Speed on MIC-MRATE to Enable Different Port Speeds

Multiservices MIC

Figure 44: MS-MIC-16G

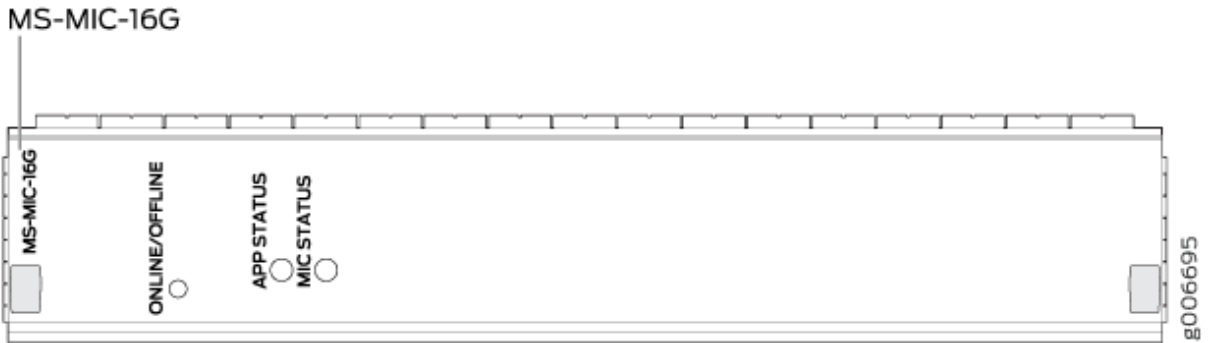

Supported Junos OS Release	<ul style="list-style-type: none"> • Junos OS Release 13.2 and later • Model number: MS-MIC-16G • Name in the CLI: MS-MIC-16G
Description	The Multiservices Modular Interfaces Card (MS-MIC) provides improved scaling and high performance for MX series routers. The MS-MIC has enhanced memory (16 GB) and enhanced processing capabilities.

Software Features

- Active flow monitoring and export of flow monitoring version 9 records based on RFC 3954
- IP Security (IPsec) encryption
- Network Address Translation (NAT) for IP addresses

NOTE: The Multiservices MIC does not support Network Address Translation-Traversal (NAT-T) until Junos OS Release 17.4R1.

- Port Address Translation (PAT) for port numbers
 - Traffic sampling
 - Stateful firewall with packet inspection—detects SYN attacks, ICMP and UDP floods, and ping-of-death attacks
 - Network Attack Protection (NAP)
 - Support for up to 6000 service sets
 - Support for MTUs up to 9192 bytes.
 - Multiple services can be supported. See [Junos OS Services Interfaces Library for Routing Devices](#) for more information.
 - See "[Protocols and Applications Supported by the MS-MIC and MS-MPC](#)" on page 584 for information about the protocols and applications that this MIC supports.
-

Hardware Features and Requirements	<ul style="list-style-type: none"> • MICs are hot-removable and hot-insertable • MS-MIC CPU Clock Cycle – 800MHz • Works with SBCs and SBCEs • Interoperable with MS-DPCs. Both MS-MPCs and MS-DPCs can co-exist in the same chassis • Chassis requires enhanced fan trays and high-capacity DC or AC power supplies <p>NOTE: Only one Multiservices MIC is supported in each MPC.</p> <p>NOTE: Starting in Junos OS Release 13.3R3, 14.1R2, and 14.2R1, MX104 routers support only two Multiservices MICs.</p>
Input/Output Power Requirements	MS-MIC—6.67 amps @ 9V (60W)
Weight and Dimensions	Weight: 2 lbs (.91 kg); Height: 0.9 in. (2.26 cm); Width: 6 in. (15.24 cm); Depth: 7 in. (17.78 cm)
LEDs	<p>Application activity tricolor LED, labeled APP STATUS:</p> <ul style="list-style-type: none"> • Off—Application is not running. • Red—Application has failed. • Yellow—Application is reconfiguring. • Green—Application is running. <p>MIC activity tricolor LED, labeled MIC STATUS:</p> <ul style="list-style-type: none"> • Off—MIC has failed. • Red—MIC has an error or failure. • Yellow—MIC is transitioning online or offline. • Green—MIC is functioning normally.

RELATED DOCUMENTATION

[Multiservices MPC | 144](#)

[MX Series MIC Overview | 26](#)

[Junos OS Services Interfaces Library for Routing Devices](#)

[Protocols and Applications Supported by the MS-MIC and MS-MPC | 584](#)

[MIC/MPC Compatibility | 45](#)

Example: Inter-Chassis Stateful High Availability for NAT and Stateful Firewall (MS-MIC, MS-MPC)

Example: Configuring Flow Monitoring on an MX Series Router with MS-MIC and MS-MPC

Inter-Chassis High Availability for MS-MIC and MS-MPC (Release 15.1 and earlier)

Example: Configuring Junos VPN Site Secure on MS-MIC and MS-MPC

ICMP, Ping, and Traceroute ALGs for MS-MICs and MS-MPCs

[MICs Supported by MX Series Routers | 27](#)

SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP

Figure 45: 4-Port SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP


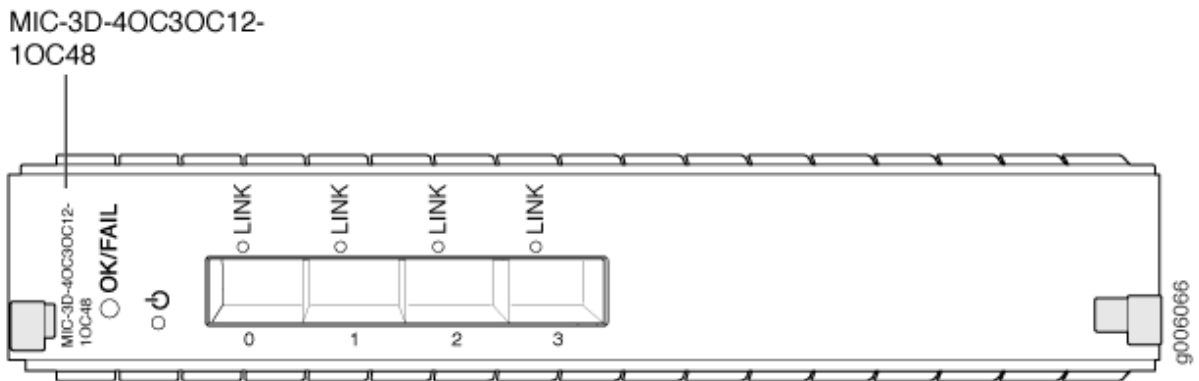


Figure 46: 8-Port SONET/SDH OC3/STM1 (Multi-Rate) MIC with SFP

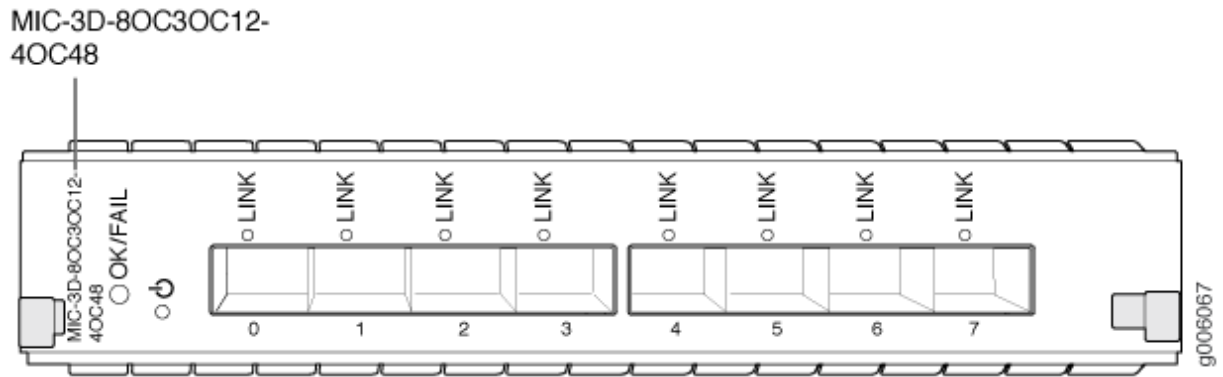

- Software release
- 4-port: Junos OS Release 11.2 and later
 - 8-port: Junos OS Release 11.2 and later

For information on which MPCs support these MICs, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- 4-port: 4 OC3/STM1 or OC12/STM4 ports

The ports can be configured to support a combination of OC3, OC12, and OC48 rates. In the combination, you can configure only one port (port 0) to support OC48, whereas OC3 or OC12 can be configured on all four ports.

- 8-port: 8 OC3/STM1 or OC12/STM4 ports

The ports can be configured to support a combination of OC3, OC12, and OC48 rates. In the combination, you can configure only two ports (port 0 and port 1) to support OC48 , whereas OC3 or OC12 can be configured on all eight ports.

- Power requirement:

- 4-port: 2.6 A @ 9 V (23.4 W)

- 8-port: 3.1 A @ 9 V (27.9 W)

- Weight:

- 4-port: 1.27 lb (0.58 kg)

- 8-port: 1.47 lb (0.67 kg)

- Model number:

- 4-port: MIC-3D-4OC3OC12-1OC48

- 8-port: MIC-3D-8OC3OC12-4OC48

Hardware features

- The ports are labeled:

- 4-port: 0-3

- 8-port: 0-7

- Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Per-port SONET/SDH framing
 - Local and remote loopback on each port
 - Optical diagnostics and monitoring
 - Clocking options: internal or external/loop mode.
 - Unified in-service software upgrade (unified ISSU)
 - Encapsulations:
 - Multiprotocol Label Switching (MPLS) fast reroute
 - MPLS CCC (circuit cross-connect)
 - MPLS TCC (translational cross-connect)
 - Cisco High-Level Data Link Control
 - Cisco HDLC CCC
 - Cisco HDLC TCC
 - Point-to-Point Protocol (PPP)
 - PPP for CCC
 - PPP for TCC
 - Flexible Frame Relay
 - Frame Relay
 - Frame Relay for CCC
 - Frame Relay for TCC
 - PPP over Frame Relay

NOTE: Ethernet over Frame Relay is not supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

LINK LED, one green per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

SONET alarms:

- Loss of light (LOL)
- Loss of signal (LOS)
- Loss of frame (LOF)
- Phase lock loop (PLL)
- Severely errored frame (SEF)
- Alarm indicator signal–line (AIS-L)
- Alarm indicator signal–path (AIS-P)
- Remote defect indicator–line (RDI-L)
- Remote defect indicator–path (RDI-P)
- Loss of pointer–path (LOP-P)
- Bit error rate–signal degrade (BERR-SD)
- Bit error rate–signal fail (BERR-SF)
- Payload label mismatch–Path (PLM-P)
- Unequipped–path (UNEQ-P)
- Remote error indicator–path (REI-P)

SDH alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)
- Loss of frame (LOF)
- Loss of signal (LOS)
- Severely errored frame (SEF)
- Multiplex-section alarm indicator signal (MS-AIS)
- H Path alarm indicator signal (HP-AIS)

- Loss of pointer (LOP)
 - Bit error rate–signal degrade (BER-SD)
 - Bit error rate–signal fail (BER-SF)
 - Multiplex section–far end receive failure (MS-FERF)
 - High order path–far end receive failure (HP-FERF)
 - High order path–payload label mismatch (HP-PLM)
 - Remote error indicator (REI)
 - Unequipped (UNEQ)
-

RELATED DOCUMENTATION

| [MX Series MIC Overview](#) | 26

Multi-Rate Ethernet MIC

Figure 47: JNP-MIC1

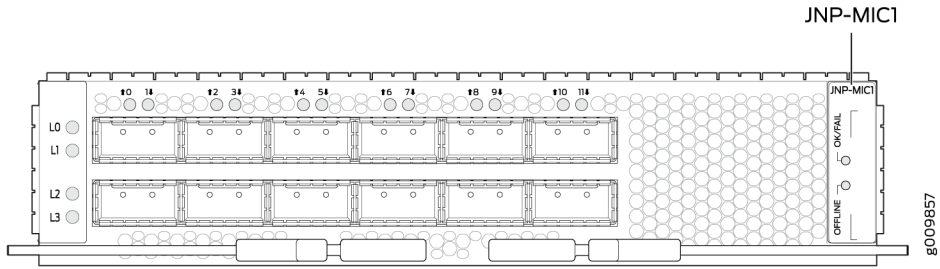


Figure 48: JNP-MIC1-MACSEC


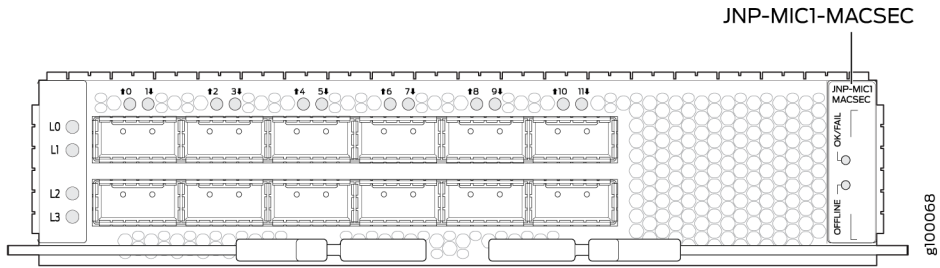


Figure 49: MIC-MACSEC-MRATE

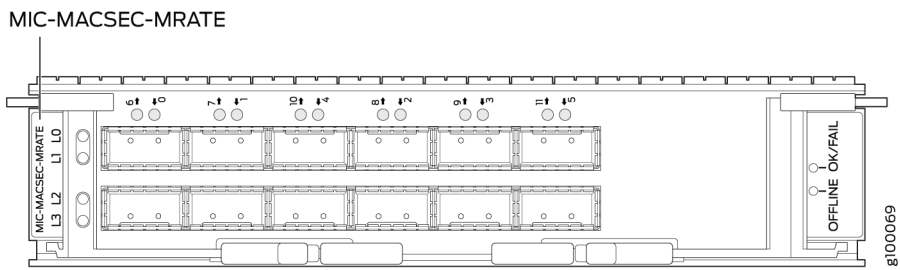

Software release

- JNP-MIC1:
Junos OS release 17.3R1 and later
- JNP-MIC1-MACSEC:
Junos OS release 17.3R2 and later
- MIC-MACSEC-MRATE:
Junos OS release 17.4R1 and later

For information about which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information about which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- Weight: 3 lb (1.36 kg)
 - Model numbers:
 - Without MACsec support: JNP-MIC1
 - With MACsec support: JNP-MIC1-MACSEC
 - With MACsec support: MIC-MACSEC-MRATE
 - Power requirement:
 - JNP-MIC1:
 - 85 W at 55° C
 - 80 W at 25° C
 - JNP-MIC1-MACSEC:
 - 130 W at 55° C
 - 125 W at 25° C
 - MIC-MACSEC-MRATE:
 - 110 W at 45° C
 - 105 W at 25° C
 - Name in the CLI:
 - JNP-MIC1: MIC1
 - JNP-MIC1-MACSEC: MIC1-MACSEC
 - MIC-MACSEC-MRATE: MACSEC-12xQSFP-FXGE-XLGE-CGE
-

Hardware features

- JNP-MIC1 and JNP-MIC1-MACSEC:
 - Twelve 100-Gigabit Ethernet ports that support quad small form-factor pluggable (QSFP28) transceivers
 - The ports are numbered **0** through **11**.
 - Each port can be configured as a 100-Gigabit Ethernet port, 40-Gigabit Ethernet port, or as four 10-Gigabit Ethernet ports (by using a breakout cable).

[Table 30 on page 353](#) lists the configurable Gigabit Ethernet port speeds for each port.

- MIC-MACSEC-MRATE:
 - Twelve Gigabit Ethernet QSFP+ ports, each of which can be configured as a 40-Gigabit Ethernet port or as four 10-Gigabit Ethernet ports (by using a breakout cable).
 - The ports are numbered **0** through **11**.
 - Eight out of the twelve ports can be configured as 100-Gigabit Ethernet ports. Port numbers **0** through **3**, and **6** through **9** are the eight 100-Gigabit Ethernet ports.
 - When used in MP8CE:
 - Four ports out of the total twelve ports support 100-Gigabit Ethernet speed
 - Maximum aggregate port capacity across ports **0** through **5** should not exceed 240 Gbps
 - Maximum aggregate port capacity across ports **6** through **11** should not exceed 240 Gbps
 - When used in MPC9E:
 - Eight ports out of the total twelve ports support 100-Gigabit Ethernet speed
-

- Maximum aggregate port capacity across ports **0** through **5** should not exceed 400 Gbps
- Maximum aggregate port capacity across ports **6** through **11** should not exceed 400 Gbp

NOTE: Compared to other MICs, MIC-MACSEC-MRATE takes longer time (around 4 minutes) to boot as it is required to bring up two MICs in serial.

[Table 31 on page 354](#) lists the configurable Gigabit Ethernet port speeds for each port.

Software features	<ul style="list-style-type: none"> • Supports rate selectability at the port level. • By default, the ports are configured as 10-Gigabit Ethernet ports. • Supports remote port identification. • MICs with model numbers JNP-MIC1-MACSEC and MIC-MACSEC-MRATE support Media Access Control Security (MACsec)
-------------------	---

Cables and connectors	<p>TIP: You can use the Hardware Compatibility Tool to find information about the pluggable transceivers supported on your Juniper Networks device.</p> <p>The list of supported transceivers for the MX Series is located at https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series.</p>
-----------------------	---

LEDs

- **OK/FAIL LED**, one bicolor:
 - OFF—MIC is offline or MIC has fault.
 - Red—MIC is in power failure state.
 - Green—MIC is online.
- **Link LED**, one green per port:
 - Steady green—Link is up.
 - Off—Link is down or disabled.
- Like port status LED, each individual lane LED support four states as: OFF, AMBER, GREEN, RED. See *MPC and MIC Lane LED Scheme Overview* for more details.

Table 30: Multi-Rate Ethernet MIC Port Speed Capabilities for JNP-MIC1 and JNP-MIC1-MACSEC

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
0	yes	yes	yes
1	yes	yes	yes
2	yes	yes	yes
3	yes	yes	yes
4	yes	yes	yes
5	yes	yes	yes
6	yes	yes	yes
7	yes	yes	yes

**Table 30: Multi-Rate Ethernet MIC Port Speed Capabilities for JNP-MIC1 and JNP-MIC1-MACSEC
(Continued)**

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
8	yes	yes	yes
9	yes	yes	yes
10	yes	yes	yes
11	yes	yes	yes

Table 31: Multi-Rate Ethernet MIC Port Speed Capabilities for MIC-MACSEC-MRATE

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
0	yes	yes	yes
1	yes	yes	yes
2	yes	yes	yes
3	yes	yes	yes
4	yes	yes	no
5	yes	yes	no
6	yes	yes	yes
7	yes	yes	yes

Table 31: Multi-Rate Ethernet MIC Port Speed Capabilities for MIC-MACSEC-MRATE (Continued)

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
8	yes	yes	yes
9	yes	yes	yes
10	yes	yes	no
11	yes	yes	no

RELATED DOCUMENTATION


Configuring Port Speed on MX10003 MPC to Enable Different Port Speeds

MX10003 MPC Port Speed Overview

Port Speed for Routing Devices

Multi-Rate Ethernet MACSEC MIC

Figure 50: MIC-MACSEC-MRATE

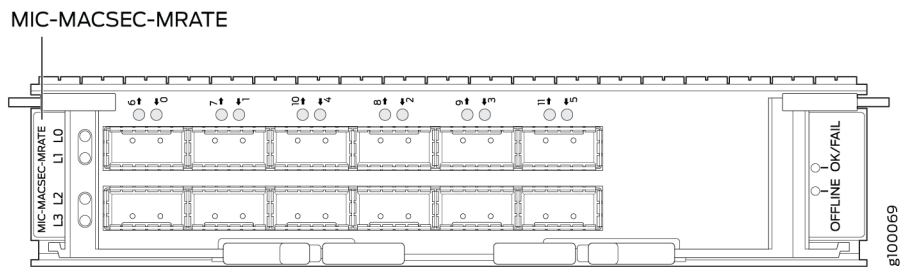

Software release Junos OS release 17.4R1 and later

For information about which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information about which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- Weight: 3 lb (1.36 kg)
 - Model number: MIC-MACSEC-MRATE
 - Power requirement:
 - 110 W at 45° C
 - 105 W at 25° C
 - Name in the CLI: MACSEC-12xQSFP-XGE-XLGE-CGE
-

- Hardware features
- Twelve Gigabit Ethernet QSFP+ ports, each of which can be configured as a 40-Gigabit Ethernet port or as four 10-Gigabit Ethernet ports (by using a breakout cable).
 - The ports are numbered **0** through **11**.
 - Eight out of the twelve ports can be configured as 100-Gigabit Ethernet ports. Port numbers **0** through **3**, and **6** through **9** are the eight 100-Gigabit Ethernet ports.
 - When used in MP8CE:
 - Four ports out of the total twelve ports support 100-Gigabit Ethernet speed
 - Maximum aggregate port capacity across ports **0** through **5** should not exceed 240 Gbps
 - Maximum aggregate port capacity across ports **6** through **11** should not exceed 240 Gbps
 - When used in MPC9E:
 - Eight ports out of the total twelve ports support 100-Gigabit Ethernet speed
 - Maximum aggregate port capacity across ports **0** through **5** should not exceed 400 Gbps
 - Maximum aggregate port capacity across ports **6** through **11** should not exceed 400 Gbp
 - [Table 32 on page 358](#) lists the configurable Gigabit Ethernet port speeds for each port.
-

- Software features
- Supports rate selectability at the port level.
 - By default, the ports are configured as 10-Gigabit Ethernet ports.
 - Supports remote port identification.
 - Supports Media Access Control Security (MACsec)
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

- **OK/FAIL LED**, one bicolor:
 - OFF—MIC is offline or MIC has fault.
 - Red—MIC is in power failure state.
 - Green—MIC is online.
- **Link LED**, one green per port:
 - Steady green—Link is up.
 - Off—Link is down or disabled.
- Like port status LED, each individual lane LED support four states as: OFF, AMBER, GREEN, RED. See *MPC and MIC Lane LED Scheme Overview* for more details.

Table 32: Multi Rate Ethernet MIC Port Speed Capabilities for MIC-MACSEC-MRATE

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
0	yes	yes	yes
1	yes	yes	yes
2	yes	yes	yes
3	yes	yes	yes
4	yes	yes	no

Table 32: Multi Rate Ethernet MIC Port Speed Capabilities for MIC-MACSEC-MRATE (Continued)

Port #	4x10-Gigabit Ethernet	40-Gigabit Ethernet	100-Gigabit Ethernet
5	yes	yes	no
6	yes	yes	yes
7	yes	yes	yes
8	yes	yes	yes
9	yes	yes	yes
10	yes	yes	no
11	yes	yes	no

RELATED DOCUMENTATION

| *MPC and MIC Lane LED Scheme Overview*

SONET/SDH OC192/STM64 MIC with XFP

Figure 51: SONET/SDH OC192/STM64 MIC with XFP



Software release

- Junos OS Release 12.2 and later

For information on which MPCs support this MIC, see ["MIC/MPC Compatibility" on page 45](#). For information on which MICs are supported on MX Series routers, see ["MICs Supported by MX Series Routers" on page 27](#).

Description

- One OC192 port
- Clear channel functionality
- Power requirement: 4.25 A @ 9 V (38.25 W)
- Weight: 1.34 lb (0.61 kg)
- Model number: MIC-3D-1OC192-XFP

Hardware features

- Maximum transmission units (MTUs) of up to 9192 bytes
- MIC bandwidth of up to 10 Gbps

- Software features
- SONET/SDH framing
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Ingress behavior aggregate (BA) classification
 - Internal and loop clocking
 - Encapsulations:
 - MPLS fast reroute
 - MPLS CCC (circuit cross-connection)
 - MPLS TCC (translational cross-connection)
 - Cisco High-Level Data Link Control (cHDLC)
 - Cisco HDLC CCC
 - Cisco HDLC TCC
 - Point-to-Point Protocol (PPP)
 - PPP for CCC
 - PPP for TCC
 - Flexible Frame Relay
 - Frame Relay
 - Frame Relay for CCC
 - Frame Relay for TCC
 - PPP over Frame Relay

NOTE: Ethernet over Frame Relay is not supported.

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a MIC is not being actively used with any valid links, take the MIC offline until you are ready to establish a link to another device. For information about taking a MIC offline, see the request chassis pic offline command in the [CLI Explorer](#).

LEDs

OK/FAIL LED, one bicolor:

- Green—MIC is functioning normally
- Red—MIC has failed

LINK LED, one tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

SONET alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)
- Loss of signal (LOS)
- Loss of frame (LOF)
- Severely errored frame (SEF)
- Alarm indicator signal–line (AIS-L)
- Alarm indicator signal–path (AIS-P)
- Remote defect indicator–line (RDI-L)
- Remote defect indicator–path (RDI-P)
- Loss of pointer–path (LOP-P)
- Bit error rate–signal degrade (BERR-SD)
- Bit error rate–signal fail (BERR-SF)
- Payload label mismatch–Path (PLM-P)
- Unequipped–path (UNEQ-P)
- Remote error indicator–path (REI-P)

SDH alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)
- Loss of frame (LOF)
- Loss of signal (LOS)
- Severely errored frame (SEF)
- Multiplex-section alarm indicator signal (MS-AIS)
- Higher order path–alarm indication signal (HP-AIS)

- Loss of pointer (LOP)
 - Bit error rate–signal degrade (BER-SD)
 - Bit error rate–signal fail (BER-SF)
 - Multiplex section–far end receive failure (MS-FERF)
 - Higher order path–far-end receive failure (HP-FERF)
 - Higher order path–payload label mismatch (HP-PLM)
 - Remote error indicator (REI)
 - Unequipped (UNEQ)
-

RELATED DOCUMENTATION


| [MX Series MIC Overview](#) | 26

MX Series PIC Descriptions

IN THIS CHAPTER

- Channelized OC12/STM4 Enhanced IQ (IQE) PIC with SFP | 366
- Channelized OC48/STM16 Enhanced IQ (IQE) PIC with SFP | 367
- SONET/SDH OC3/STM1 (Multi-Rate) PIC with SFP | 375
- SONET/SDH OC12/STM4 (Multi-Rate) PIC with SFP | 380
- SONET/SDH OC48/STM16 Enhanced IQ (IQE) PIC with SFP | 384
- SONET/SDH OC48/STM16 (Multi-Rate) PIC with SFP | 390
- SONET/SDH OC48/STM16 PIC with SFP | 394
- SONET/SDH OC192c/STM64 PIC | 399
- SONET/SDH OC192c/STM64 PIC with XFP | 404

Channelized OC12/STM4 Enhanced IQ (IQE) PIC with SFP

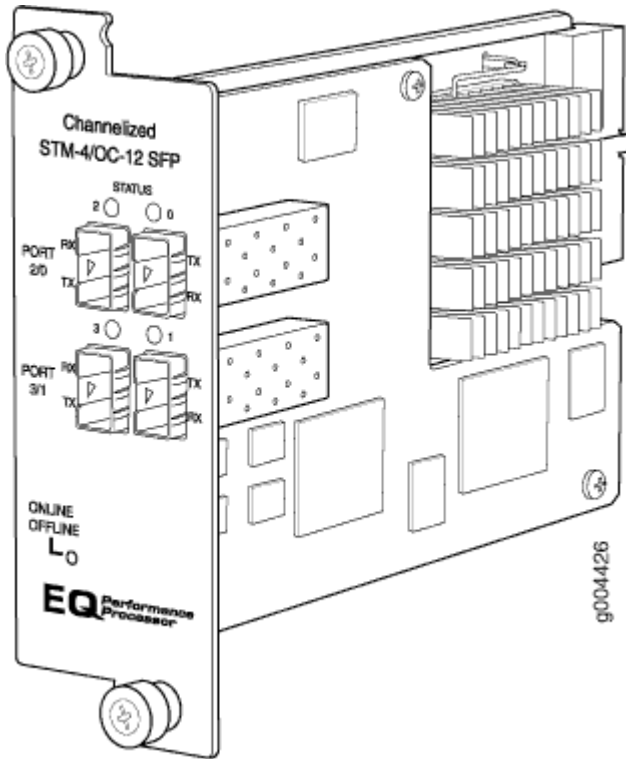

Software release • Junos 9.5 and later

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

Channelized OC48/STM16 Enhanced IQ (IQE) PIC with SFP

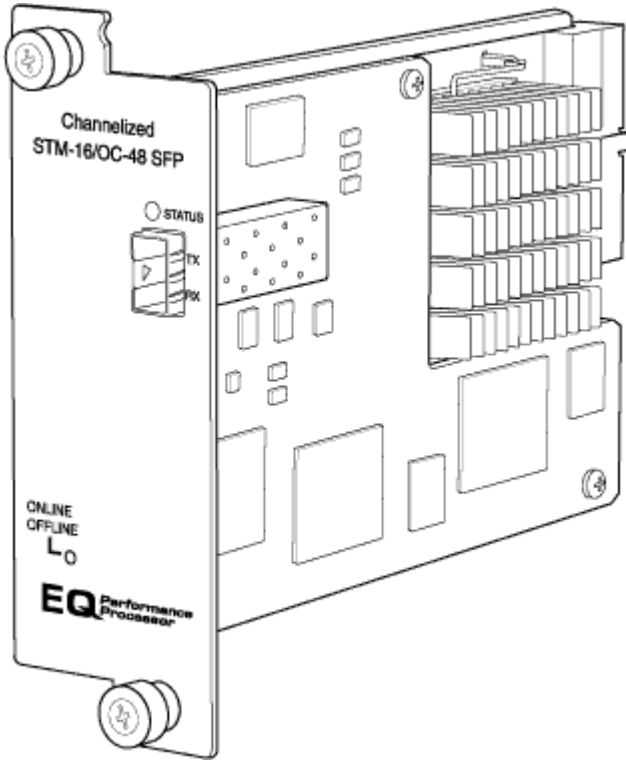

Software release • Junos 9.5 and later

Description	<ul style="list-style-type: none">• One OC48/STM16 port• SONET or SDH is configurable on a per-port granularity• SONET channelization:<ul style="list-style-type: none">• 4 OC12 channel• 16 OC3 channels• 48 DS3 channels• 672 DS1 channels• 975 DS0 channels• SDH channelization:<ul style="list-style-type: none">• 4 STM4 channel• 16 STM1 channels• 48 E3 channels• 504 E1 channels• 975 DS0 channels• Power requirement: 1.10 A @ 48V (53 W)• Model Number: PB-1CHOC48-STM16-IQE-SFP
-------------	---

Hardware features	<ul style="list-style-type: none">• Port is numbered 0.
-------------------	---

-
- Software features
- Quality of service (QoS) per channel: weighted round-robin (WRR), random early detection (RED), weighted random early detection (WRED)
 - Enhanced fine-grained queuing per logical interface. See the [Junos OS Class of Service User Guide for Routing Devices](#) for more information about class of service features.
 - Subrate and scrambling:
 - Digital Link/Quick Eagle
 - Kentrox
 - Larscom
 - ADTRAN
 - Verilink
 - Packet buffering, Layer 2 parsing
 - M13/C-bit parity encoding
 - DS3 far-end alarm and control (FEAC) channel support
 - Local line, remote line, and remote payload loopback testing
 - Simple Network Management Protocol (SNMP): OC12, OC3 MIB, DS3 MIB, T1 MIB
 - Dynamic, arbitrary channel configuration
 - Full bit error rate test (BERT)
 - Encapsulations:
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Extended Frame Relay for CCC and TCC
 - Flexible Frame Relay
 - Frame Relay
-

- Frame Relay for CCC
- Frame Relay for TCC
- Frame Relay port CCC
- High-Level Data Link Control (HDLC)
- HDLC framing for CCC
- HDLC framing for TCC
- MPLS CCC
- MPLS TCC
- Multilink Frame Relay (MLFR) UNI NNI (MFR FRF.16)
- Point-to-Point Protocol (PPP)
- PPP for CCC
- PPP for TCC
- Encapsulations available only for DS1:
 - Multilink Frame Relay end-to-end (MLFR FRF.15)
 - Multilink PPP (MLPPP)
 - PPP over Frame Relay

Cables and
connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

LEDs

One tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

SONET alarms:

- Alarm indication signal—line (AIS-L)
- Alarm indication signal—path (AIS-P)
- Bit error rate—signal degrade (BERR-SD)
- Bit error rate—signal fail (BERR-SF)
- Loss of frame (LOF)
- Loss of light (LOL)
- Loss of pointer (LOP)
- Loss of signal (LOS)
- Payload label mismatch (PLM-P)
- Remote defect indication—line (RDI-L)
- Remote defect indication—path (RDI-P)
- Remote error indication (REI)
- Payload unequipped (unequipped STS at path level) (UNEQ-P)
- Virtual container—alarm indication signal (VAIS)
- Virtual container—loss of pointer (VLOP)
- Virtual container—mismatch (VMIS)
- Virtual container—remote defect indication (VRD1)
- Virtual container—unequipped (VUNEQ)

SDH alarms:

- Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
-

- Higher order path—alarm indication signal (HP-AIS)
- Higher order path—far-end receive failure (HP-FERF)
- Higher order path—payload label mismatch (HP-PLM)
- Higher order path—loss of pointer (HP-LOP)
- Higher order path—remote defect indication (HP-RDI)
- Higher order path—unequipped (HP-UNEQ)
- Loss of frame (LOF)
- Loss of light (LOL)
- Loss of signal (LOS)
- Multiplex section—alarm indication signal (MS-AIS)
- Multiplex section—far-end receive failure (MS-FERF)
- Multiplex section—remote defect indication (MS-RDI)
- Multiplex section—remote error indication (MS-REI)
- Phase lock loop (PLL)
- Remote error indication (REI)
- Severely errored frame (SEF)
- Tributary unit—alarm indication signal (TU-AIS)
- Tributary unit—loss of pointer (TU-LOP)
- Tributary unit—mismatch (TU-MIS)
- Tributary unit—remote defect indication (TU-RD1)
- Tributary unit—unequipped (TU-UNEQ)

DS1 alarms:

- Alarm indication signal (AIS)
 - Loss of frame (LOF)
-

- Remote alarm indication signal (RAIS)
 -
 - DS1 error detection:
 - Bursty errored seconds (BES)
 - CRC errors
 - Errored seconds (ES)
 - Line errored seconds (LES)
 - Loss of framing seconds (LOFS)
 - Severely errored seconds (SES)
 - Severely errored framing seconds (SEFS)
 - Unavailable seconds (UAS)
 - DS3 alarms:
 - Alarm indication signal (AIS)
 - Loss of frame (LOF)
 - Yellow alarm
 - DS3 error detection:
 - C-bit code violations (CCV)
 - C-bit errored seconds (CES)
 - C-bit severely errored framing seconds (CEFS)
 - CRC errors
 - Excessive zeros (EXZ)
 - Far-end block error (FEBE)
-

- Far-end receive failure (FERF)
- Line errored seconds (LES)
- Parity bit (P-bit) code violations (PCV)
- Parity bit (P-bit) errored seconds (PES)
- Parity bit (P-bit) severely errored framing seconds (PSES)
- Severely errored framing seconds (SEFS)
- Unavailable seconds (UAS)

Instrumentation
(counters)

- Layer 2 per-queue and per-channel packet and byte counters

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC3/STM1 (Multi-Rate) PIC with SFP

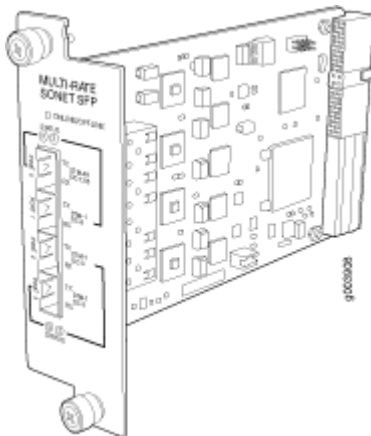

Software release	<ul style="list-style-type: none">• Junos 9.5 and later
------------------	---

Description	<ul style="list-style-type: none">• Rate-selectable using one of the following rates:<ul style="list-style-type: none">• 1-port OC12/STM4• 1-port OC12c/STM4c• 4-port OC3c/STM1c• Power requirement: 0.40 A @ 48 V (19 W)• Model Number: PB-4OC3-1OC12-SON-SFP
-------------	--

Hardware features	<ul style="list-style-type: none">• Multiplexing and demultiplexing• Rate policing on input• Rate shaping on output• Packet buffering, Layer 2 parsing
-------------------	---

Software features	<ul style="list-style-type: none">• Optical diagnostics and related alarms• Per-port SONET/SDH framing• Link aggregation• Alarm and event counting and detection• Dual-router automatic protection switching (APS)• Multiprotocol Label Switching (MPLS) fast reroute• Encapsulations:<ul style="list-style-type: none">• Circuit cross-connect (CCC)• Translational cross-connect (TCC)• Frame Relay• High-Level Data Link Control (HDLC)• Point-to-Point Protocol (PPP)
-------------------	---

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request chassis pic offline command in the [CLI Explorer](#).

LEDs

One tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored frames (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC12/STM4 (Multi-Rate) PIC with SFP

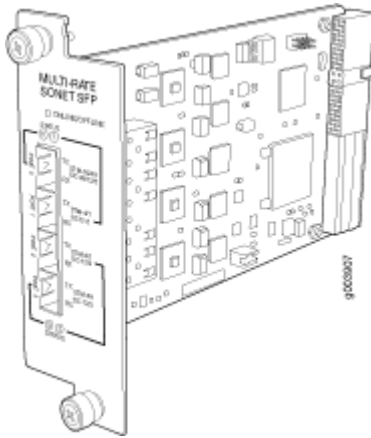

Software release

- Junos 9.5 and later

Description

- Rate-selectable using one of the following rates:
 - 1-port OC12
 - 1-port OC48
 - 1-port OC48c
 - 4-port OC3c
 - 4-port OC12c
- Power requirement: 0.40 A @ 48 V (19 W)
- Model Number: PB-4OC3-4OC12-SON-SFP

Hardware features

- Multiplexing and demultiplexing
- Rate policing on input
- Rate shaping on output
- Packet buffering, Layer 2 parsing

- Software features
- Optical diagnostics and related alarms
 - Per-port SONET/SDH framing
 - Link aggregation
 - Alarm and event counting and detection
 - Dual-router automatic protection switching (APS)
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Encapsulations:
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Frame Relay
 - High-Level Data Link Control (HDLC)
 - Point-to-Point Protocol (PPP)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request `chassis pic offline` command in the [CLI Explorer](#).

LEDs

One tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored frames (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC48/STM16 Enhanced IQ (IQE) PIC with SFP

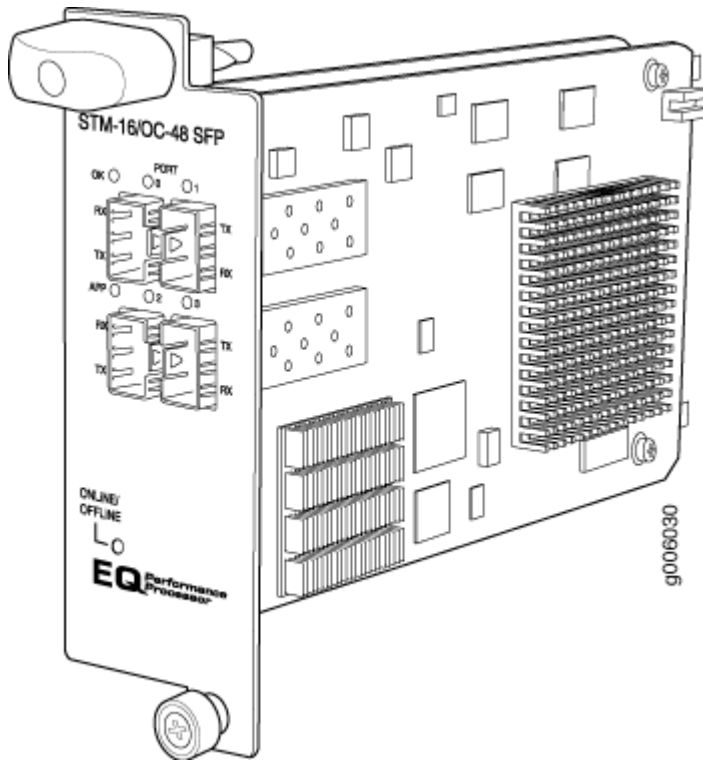

Software release • Junos OS Release 10.4R2 and later (Type 3)

Description • Four OC48/STM16 ports

- Clear channel functionality
- SONET and SDH is configured on a per-port granularity
- Power requirement: 1.06 A @ 48 V (51 W)
- Weight: 1.6 lb (0.725 kg)
- Model number: PC-4OC48-STM16-IQE-SFP

- Hardware features
- Ports are numbered:
 - Top row: 0 and 1 from left to right
 - Bottom row: 2 and 3 from left to right
 - Maximum transmission units (MTUs) of up to 9192 bytes
-

- Software features
- Quality of service (QoS) per channel: weighted round-robin (WRR), random early detection (RED), weighted random early detection (WRED)
 - Fine-grained egress queuing per logical interface. See the [Junos OS Class of Service User Guide for Routing Devices](#) for more information about class-of-service features
 - Packet buffering
 - Local line and remote payload loopback testing
 - Optical diagnostics and monitoring
 - Clocking options: internal or external/loop mode. Each OC48 transmitter port is configured either in internal or external mode. The default clocking option is internal mode.
 - Encapsulations:
 - Extended Frame Relay for circuit cross-connect (CCC) and translational cross-connect (TCC)
 - Flexible Frame Relay
 - Frame Relay
 - Frame Relay for CCC
 - Frame Relay for TCC
 - Frame Relay port CCC
 - High-Level Data Link Control (HDLC)
 - HDLC framing for CCC
 - HDLC framing for TCC
 - MPLS CCC
 - MPLS TCC
 - Point-to-Point Protocol (PPP)
 - PPP for CCC
 - PPP for TCC
-

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request chassis pic offline command in the [CLI Explorer](#).

LEDs

OK LED, one tricolor:

- Off—PIC is offline and safe to remove from the router
- Green—PIC is operating normally
- Yellow—PIC is initializing
- Red—PIC has an error or failure

APP LED, one green per port:

- Off—Service is not running
- Green—Service is running under acceptable load

Port LEDs, one tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

SONET alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)
- Loss of frame (LOF)
- Loss of signal (LOS)
- Severely errored frame (SEF)
- Alarm indicator signal—line (AIS-L)
- Alarm indicator signal—path (AIS-P)
- Loss of pointer (LOP)
- Bit error rate—signal degrade (BERR-SD)
- Bit error rate—signal fail (BERR-SF)
- Remote defect indicator—line (RDI-L)
- Remote defect indicator—path (RDI-P)
- Remote error indicator (REI)
- Unequipped (UNEQ)
- Payload label mismatch—path (PLM-P)

SDH alarms:

- Loss of light (LOL)
- Phase lock loop (PLL)
- Loss of frame (LOF)
- Loss of signal (LOS)
- Severely errored frame (SEF)
- Multiplex-section alarm indicator signal (MS-AIS)
- H Path alarm indicator signal (HP-AIS)

- Loss of pointer (LOP)
- Bit error rate—signal degrade (BERR-SD)
- Bit error rate—signal fail (BERR-SF)
- Multiplex section—far end receive failure (MS-FERF)
- High order path—far end receive failure (HP-FERF)
- Remote error indicator (REI)
- Unequipped (UNEQ)
- High order path—payload label mismatch - Path (HP-PLM)

Optical diagnostics related alarms:

NOTE: Transceivers from some vendors do not support these fields.

- Temperature high/low alarms and warnings
- Supply voltage high/low alarms and warnings
- Tx bias current high/low alarms and warnings
- Tx output power high/low alarms and warnings
- Rx received power high/low alarms and warnings

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC48/STM16 (Multi-Rate) PIC with SFP

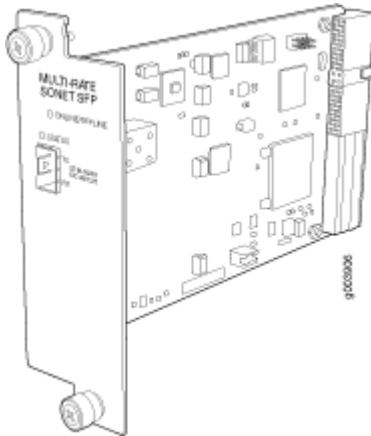

Software release

- Junos 9.5 and later

Description

- Rate-selectable using one of the following rates:
 - 1-port OC3c/STM1c
 - 1-port OC12/STM4
 - 1-port OC12c/STM4c
 - 1-port OC48/STM16
 - 1-port OC48c/STM16c
- Power requirement: 0.20 A @ 48 V (9.5 W)
- Model Number: PB-1OC48-SON-B-SFP

Hardware features

- Multiplexing and demultiplexing
- Rate policing on input
- Rate shaping on output
- Packet buffering, Layer 2 parsing

- Software features
- Optical diagnostics and related alarms
 - Per-port SONET/SDH framing
 - Link aggregation
 - Alarm and event counting and detection
 - Dual-router automatic protection switching (APS)
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Encapsulations:
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Frame Relay
 - High-Level Data Link Control (HDLC)
 - Point-to-Point Protocol (PPP)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request `chassis pic offline` command in the [CLI Explorer](#).

LEDs

One tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored frames (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC48/STM16 PIC with SFP

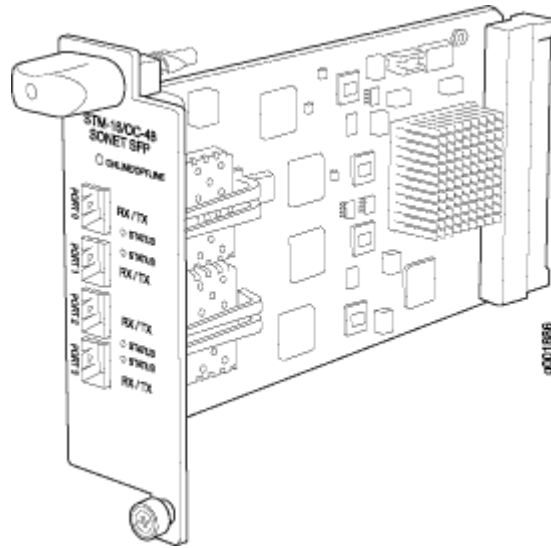

Software release	<ul style="list-style-type: none"> • Junos 9.4 and later
Description	<ul style="list-style-type: none"> • Four OC48 ports • Power requirement: 0.86 A @ 48 V (41.4 W) • Model Number: PC-4OC48-SON-SFP
Hardware features	<ul style="list-style-type: none"> • Rate policing on input • Rate shaping on output • Packet buffering, Layer 2 parsing

- Software features
- Optical diagnostics and related alarms
 - Configuration of SONET or SDH framing on a per-port basis
 - SONET/SDH framing
 - Link aggregation
 - Alarm and event counting and detection
 - Dual-router automatic protection switching (APS)
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Encapsulations:
 - High-Level Data Link Control (HDLC)
 - Frame Relay
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Point-to-Point Protocol (PPP)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request `chassis pic offline` command in the [CLI Explorer](#).

LEDs

One tricolor per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored framing (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC192c/STM64 PIC

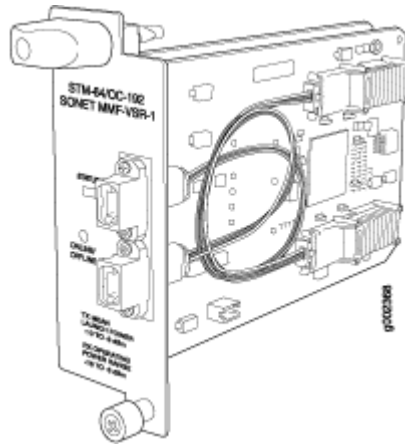

Software release	<ul style="list-style-type: none">• Junos 9.4 and later
Description	<ul style="list-style-type: none">• One OC192 port• Power requirement: 0.45 A @ 48 V (21.6 W)• Model Number: PC-1OC192-SON-VSR
Hardware features	<ul style="list-style-type: none">• Multiplexing and demultiplexing• Rate policing on input• Rate shaping on output• Packet buffering, Layer 2 parsing

- Software features
- SONET/SDH framing
 - Link aggregation
 - Alarm and event counting and detection
 - Dual-router automatic protection switching (APS)
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Encapsulations:
 - High-Level Data Link Control (HDLC)
 - Frame Relay
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Point-to-Point Protocol (PPP)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

The list of supported transceivers for the MX Series is located at <https://pathfinder.juniper.net/hct/category/#catKey=100001&modelType;=All&pf;=MX+Series>.

- Very short reach (VSR 1): 12-ribbon multimode fiber with MTP connector (Rx and Tx)
- Fiber-optic 10-gigabit small form-factor pluggable (XFP) transceivers: 10GBASE-S very short reach (VSR-1) (model number: XFP-10G-S)

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request chassis pic offline command in the [CLI Explorer](#).

LEDs

One tricolor LED per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored framing (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION


[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

SONET/SDH OC192c/STM64 PIC with XFP

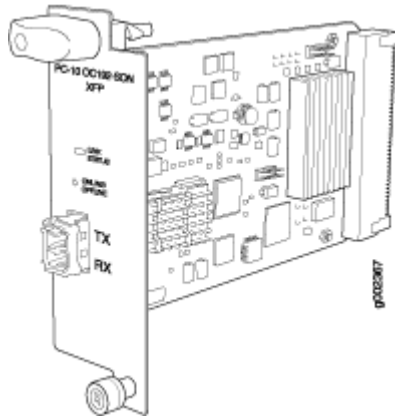

-
- | | |
|-------------------|---|
| Software release | <ul style="list-style-type: none">• Junos 9.4 and later |
| Description | <ul style="list-style-type: none">• One OC192 port• Power requirement: 0.52A @ 48 V (25 W)• Model number: PB-1OC192-SON-XFP |
| Hardware features | <ul style="list-style-type: none">• Multiplexing and demultiplexing• Rate policing on input• Rate shaping on output• Packet buffering, Layer 2 parsing |
-

- Software features
- SONET/SDH framing
 - Link aggregation
 - Alarm and event counting and detection
 - Dual-router automatic protection switching (APS)
 - Multiprotocol Label Switching (MPLS) fast reroute
 - Encapsulations:
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)
 - Frame Relay
 - High-Level Data Link Control (HDLC)
 - Point-to-Point Protocol (PPP)

Cables and connectors

TIP: You can use the [Hardware Compatibility Tool](#) to find information about the pluggable transceivers supported on your Juniper Networks device.

NOTE: To extend the life of the laser, when a PIC is not being actively used with any valid links, take the PIC offline until you are ready to establish a link to another device. For information about taking a PIC offline, see the request chassis pic offline command in the [CLI Explorer](#).

LEDs

One tricolor LED per port:

- Off—Not enabled
 - Green—Online with no alarms or failures
 - Yellow—Online with alarms for remote failures
 - Red—Active with a local alarm; router has detected a failure
-

Alarms, errors, and events

- SONET alarms:
 - Alarm indication signal—line (AIS-L)
 - Alarm indication signal—path (AIS-P)
 - Bit error rate—signal degrade (BERR-SD)
 - Bit error rate—signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Far-end bit error: remote error indication—line (REI-L), far-end line coding violations (CV-LFE)
 - Far-end bit error: remote error indication—path (REI-P), far-end path coding violations (CV-PFE)
 - Loss of frame (LOF)
 - Loss of pointer (LOP-P)
 - Loss of signal (LOS)
 - Payload label mismatch (PLM-P)
 - Payload unequipped (unequipped STS at path level) (UNEQ-P)
 - Remote defect indication—line (RDI-L)
 - Remote defect indication—path (RDI-P)
- SDH alarms:
 - Administrative unit alarm indication signal (AU-AIS)
 - Bit error rate signal degrade (BERR-SD)
 - Bit error rate signal fail (BERR-SF)
 - Bit interleaved parity (BIP) error B1, B2, B3
 - Higher order path—payload label mismatch (HP-PLM)
 - Higher order path—loss of pointer (HP-LOP)

- Higher order path—remote defect indication (HP-RDI)
 - Higher order path—unequipped (HP-UNEQ)
 - Loss of frame (LOF)
 - Loss of signal (LOS)
 - Multiplex section—alarm indication signal (MS-AIS)
 - Multiplex section—remote defect indication (MS-RDI)
 - Multiplex section—remote error indication (MS-REI)
 - Error detection:
 - Errored seconds (ES-S, ES-L, ES-P)
 - Far-end errored seconds (ES-LFE, ES-PFE)
 - Far-end severely errored seconds (SES-LFE, SES-PFE)
 - Far-end unavailable seconds (UAS-LFE, UAS-PFE)
 - Severely errored framing (SEF)
 - Severely errored framing seconds (SEFS-S)
 - Severely errored seconds (SES-S, SES-L, SES-P)
 - Unavailable seconds (UAS-L, UAS-P)
-

RELATED DOCUMENTATION

[MX Series FPC and PIC Overview | 61](#)

[FPCs Supported by MX240, MX480, and MX960 Routers | 62](#)

[PICs Supported by MX240, MX480, and MX960 Routers | 63](#)

[High Availability Features | 62](#)

3

PART

Protocol and Application Support

DPC Protocol and Application Support for MX240, MX480, and MX960 | 409

SPC Protocol and Application Support for MX240, MX480, and MX960 | 449

MPC Protocol and Application Support for MX240, MX480, MX960, MX2010,
MX2020, and MX10003 | 451

DPC Protocol and Application Support for MX240, MX480, and MX960

IN THIS CHAPTER

- Protocols and Applications Supported by DPCs and Enhanced DPCs (DPC and DPCE-R) | 409
- Protocols and Applications Supported by Enhanced Ethernet Services DPCs (DPCE-X) | 420
- Protocols and Applications Supported by Enhanced Queuing IP Services DPCs (DPCE-R-Q) | 428
- Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) | 438
- Protocols and Applications Supported by the Multiservices DPC (MS-DPC) | 445

Protocols and Applications Supported by DPCs and Enhanced DPCs (DPC and DPCE-R)

[Table 33 on page 410](#) contains the first Junos OS Release support for protocols and applications on the MX240, MX480, and MX960 DPCs and Enhanced DPCs. A dash indicates that the protocol or application is not supported.

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<i>Access Node Control Protocol (ANCP)</i>	9.4	9.4	9.4	9.4	9.4
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	8.2	9.1	8.4	9.1	9.2
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	8.2	9.1	8.4	9.1	9.2
<i>Border Gateway Protocol (BGP)</i>	8.2	9.1	8.4	9.1	9.2
BGP/ Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	8.2	9.1	8.4	9.1	9.2
<i>Distance Vector Multicast Routing Protocol (DVMRP)</i> and generic routing encapsulation (GRE) support—access side and server side	8.2	9.1	8.4	9.1	9.2

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	8.4	9.1	8.4	9.1	9.2
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	9.0	9.1	9.0	9.1	9.2
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	9.1	9.1	9.1	9.1	9.2
<i>Firewall filters</i>	8.2	9.1	8.4	9.1	9.2
<i>Flexible Ethernet encapsulation</i>	8.2	9.1	8.4	9.1	9.2
<i>Graceful Routing Engine Switchover (GRES)</i>	8.3	9.1	8.4	9.1	9.2

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
Ingress hierarchical quality of service (HQoS) shaping and <i>hierarchical-scheduler</i> :	-	-	-	-	-
<ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 					
IPv4	8.2	9.1	8.4	9.1	9.2
IP multicast	8.2	9.1	8.4	9.1	9.2
IPv6	8.2	9.1	8.4	9.1	9.2
IPv6 multicast	8.2	9.1	8.4	9.1	9.2
IPv6 Neighbor Discovery	8.2	9.1	8.4	9.1	9.2
<i>Intermediate System-to-Intermediate System (IS-IS)</i>	8.2	9.1	8.4	9.1	9.2

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
Layer 2 frame filtering	8.2	9.1	8.4	9.1	9.2
<i>IEEE 802.3ad link aggregation</i>	8.2	9.1	8.4	9.1	9.2
<i>Link Aggregation Control Protocol (LACP)</i>	8.2	9.1	8.4	9.1	9.2
Local loopback	8.2	9.1	8.4	9.1	9.2
MAC learning, policing, accounting, and filtering	8.2	9.1	8.4	9.1	9.2
<i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs)	8.4	9.1	8.4	9.1	9.2
<i>Multi-chassis link aggregation (MC-AE)</i>	10.0	10.0	10.0	10.0	10.0
Multiple tag protocol identifiers (TPIDs)	8.2	9.1	8.4	9.1	9.2

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<i>Multiprotocol Label Switching (MPLS)</i>	8.2	9.1	8.4	9.1	9.2
<i>mvrp</i>	10.1	10.1	10.1	10.1	10.1
IEEE 802.3ah OAM	8.2	9.1	8.4	9.1	9.2
<ul style="list-style-type: none"> • Discovery and link monitoring • <i>Fault signaling and detection</i> • <i>Remote loopback</i> 					
<i>Multitopology Routing (MTR)</i>	9.0	9.1	9.0	9.1	9.2
<i>Open Shortest Path First (OSPF)</i>	8.2	9.1	8.4	9.1	9.2
Packet mirroring	8.2	9.1	8.4	9.1	9.2
IEEE 802.1ah provider backbone bridges (PBB)	10.0	10.0	10.0	10.0	10.0

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
Quality of service (QoS) per port:	8.2	9.1	8.4	9.1	9.2
<ul style="list-style-type: none"> • 8 queues per port • Shaping at queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 					
<ul style="list-style-type: none"> • Shaping at port level 	-	-	-	-	-

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
Quality of service (QoS) per virtual LAN (VLAN):	8.2	9.1	8.4	9.1	9.2
<ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 					
Quality of service (QoS) queuing per virtual LAN (VLAN)	-	-	-	-	-
<i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i>	8.4	9.1	8.4	9.1	9.2
Per-VLAN Spanning Tree (PVST)+	9.0	9.1	9.0	9.1	9.2
<i>RSVP Overview</i>	8.2	9.1	8.4	9.1	9.2
<i>Routing Information Protocol (RIP)</i>	8.2	9.1	8.4	9.1	9.2

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<i>SNMP</i>	8.2	9.1	8.4	9.1	9.2
IEEE 802.1D Spanning Tree Protocol (STP)	8.4	9.1	8.4	9.1	9.2
Subscriber Management:	9.2	9.2	9.2	9.2	9.2
NOTE: Starting in Junos OS Release 15.1R4, MS-DPCs are not supported for subscriber management on MX Series routers.					
• Access Node Control Protocol (ANCP)	9.4	9.4	9.4	9.4	9.4
• Dynamic profiles	9.2	9.2	9.2	9.2	9.2
• Dynamic VLANs	-	9.5	9.5	9.5	9.5

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<ul style="list-style-type: none"> Enhanced Dynamic Host Configuration Protocol (DHCP) local server 	9.3	9.3	9.3	9.3	9.3
<ul style="list-style-type: none"> Enhanced DCHP relay 	9.3	9.3	9.3	9.3	9.3
<ul style="list-style-type: none"> Firewall filters 	9.2	9.2	9.2	9.2	9.2
<ul style="list-style-type: none"> Internet Group Management Protocol (IGMP) 	9.2	9.2	9.2	9.2	9.2
<ul style="list-style-type: none"> QoS 	9.2	9.2	9.2	9.2	9.2
<ul style="list-style-type: none"> Subscriber Secure Policy 	9.4	9.4	9.4	9.4	9.4
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	9.5	9.5	9.5	9.5	9.5

Table 33: Protocols and Applications Supported by the DPCs and Enhanced DPCs (DPC and DPCE-R)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)				
	DPC-R-4XGE-XFP	DPCE-R-2XGE-XFP	DPCE-R-4XGE-XFP	DPCE-R-40GE-TX	DPCE-R-20GE-2XGE
	DPC-R-40GE-SFP (DPC)	(Enhanced DPC)	DPCE-R-40GE-SFP (Enhanced DPC)	(Tri-Rate Enhanced DPC)	(Multi-Rate Enhanced DPC)
<i>IEEE 802.1Q VLANs:</i>	8.2	9.1	8.4	9.1	9.2
<ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 					
<i>Virtual private LAN service (VPLS)</i>	8.2	9.1	8.4	9.1	9.2
Virtual private network (VPN)	8.2	9.1	8.4	9.1	9.2
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	8.2	9.1	8.4	9.1	9.2

RELATED DOCUMENTATION

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\) | 420](#)

[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\) | 428](#)

Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) | 438

Protocols and Applications Supported by the Multiservices DPC (MS-DPC) | 445

Protocols and Applications Supported by Enhanced Ethernet Services DPCs (DPCE-X)

Table 34 on page 420 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, and MX960 Enhanced Ethernet Services DPCs. A dash indicates that the protocol or application is not supported.

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
Access Node Control Protocol (ANCP)	9.4	9.4	9.4
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	8.4	9.1	9.2
Bidirectional Forwarding Detection protocol (BFD)	8.4	9.1	9.2
Border Gateway Protocol (BGP)	8.4	9.1	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
BGP/Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	8.4	9.1	9.2
Distance Vector Multicast Routing Protocol (DVMRP) and generic routing encapsulation (GRE) support—access side and server side	8.4	9.1	9.2
IEEE 802.1ag Ethernet OAM Continuity Check protocol	8.4	9.1	9.2
IEEE 802.1ag Ethernet OAM Linktrace protocol	9.0	9.1	9.2
IEEE 802.1ag Ethernet OAM Loopback protocol	9.1	9.1	9.2
Firewall filters	8.4 (Limited filter terms)	9.1 (Limited filter terms)	9.2 (Limited filter terms)
Flexible Ethernet encapsulation	8.4	9.1	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
Graceful Routing Engine Switchover (GRES)	8.4	9.1	9.2
Ingress hierarchical quality of service (HQoS) shaping and scheduling:	-	-	-
<ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 			
Intermediate System-to-Intermediate System (IS-IS)	8.4	9.1	9.2
IPv4 (No BGP)	8.4	9.1	9.2)
IP multicast (No BGP)	8.4	9.1	9.2
IPv6 (No BGP)	8.4	9.1	9.2)
IPv6 multicast (No BGP)	8.4	9.1	9.2)

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
IPv6 Neighbor Discovery (No BGP)	8.4	9.1)	9.2)
Layer 2 frame filtering	8.4	9.1	9.2
IEEE 802.3ad link aggregation	8.4	9.1	9.2
Link Aggregation Control Protocol (LACP)	8.4	9.1	9.2
Local loopback	8.4	9.1	9.2
MAC learning, policing, accounting, and filtering	8.4	9.1	9.2
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) (part of IEEE 802.1Q VLANs)	8.4	9.1	9.2
Multiple tag protocol identifiers (TPIDs)	8.4	9.1	9.2
Multiprotocol Label Switching (MPLS)	8.4	9.1	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
IEEE 802.3ah OAM	8.4	9.1	9.2
	<ul style="list-style-type: none"> • Discovery and link monitoring • Fault signaling and detection • Remote loopback 		
Multitopology Routing (MTR)	9.0	9.1	9.2
Open Shortest Path First (OSPF)	8.4	9.1	9.2
Packet mirroring	8.4	9.1	9.2
Quality of service (QoS) per port:	8.4	9.1	9.2
	<ul style="list-style-type: none"> • 8 queues per port • Shaping at queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 		

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
Quality of service (QoS) per virtual LAN (VLAN):	8.4	9.1	9.2
<ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 			
Quality of service (QoS) queuing per virtual LAN (VLAN)	-	-	-
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)	8.4	9.1	9.2
Per-VLAN Spanning Tree (PVST)+	9.0	9.1	9.2
RSVP	8.4	9.1	9.2
Routing Information Protocol (RIP)	8.4	9.1	9.2
SNMP	8.4	9.1	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
IEEE 802.1D Spanning Tree Protocol (STP)	8.4	9.1	9.2
Subscriber Management:	9.4	9.4	9.4
Starting in Junos OS Release 15.1R4, MS-DPCs are not supported for subscriber management on MX Series routers.			
<ul style="list-style-type: none"> • Access Node Control Protocol (ANCP) 	9.4	9.4	9.4
<ul style="list-style-type: none"> • Dynamic profiles 	9.2	9.2	9.2
<ul style="list-style-type: none"> • Dynamic VLANs 	9.5	9.5	9.5
<ul style="list-style-type: none"> • Enhanced Dynamic Host Configuration Protocol (DHCP) local server 	9.3	9.3	9.3
<ul style="list-style-type: none"> • Enhanced DHCP relay 	9.3	9.3	9.3
<ul style="list-style-type: none"> • Firewall filters 	9.2	9.2	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
<ul style="list-style-type: none"> Internet Group Management Protocol (IGMP) 	9.2	9.2	9.2
<ul style="list-style-type: none"> QoS 	9.2	9.2	9.2
<ul style="list-style-type: none"> Subscriber Secure Policy 	9.4	9.4	9.4
Two-Way Active Measurement Protocol (TWAMP)	9.5	9.5	9.5
IEEE 802.1Q VLANs:	8.4	9.1	9.2
<ul style="list-style-type: none"> VLAN stacking and rewriting Channels defined by two stacked VLAN tags Flexible VLAN tagging IP service for nonstandard TPID and stacked VLAN tags 			
Virtual private LAN service (VPLS)	8.4	9.1	9.2
Virtual private network (VPN) (L2 VPN only)	8.4	9.1	9.2

Table 34: Protocols and Applications Supported by the Enhanced Ethernet Services DPCs (DPCE-X)
(Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-X-4XGE-XFP	DPCE-X-40GE-TX	DPCE-X-20GE-2XGE
	DPCE-X-40GE-SFP (Enhanced Ethernet Services DPC)	(Tri-Rate Enhanced Ethernet Services DPC)	(Multi-Rate Enhanced Ethernet Services DPC)
Virtual Router Redundancy Protocol (VRRP) for IPv4	8.4	9.1	9.2

RELATED DOCUMENTATION

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\) | 428](#)

[Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs \(DPCE-X-Q\) | 438](#)

[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\) | 445](#)

Protocols and Applications Supported by Enhanced Queuing IP Services DPCs (DPCE-R-Q)

Table 35 on page 429 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, and MX960 Enhanced Queuing IP Services DPCs. A dash indicates that the protocol or application is not supported.

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Access Node Control Protocol (ANCP)	9.4	9.4	9.4
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	8.5	9.1	9.3
Bidirectional Forwarding Detection protocol (BFD)	8.5	9.1	9.3
Border Gateway Protocol (BGP)	8.5	9.1	9.3
BGP/Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	8.5	9.1	9.3
Distance Vector Multicast Routing Protocol (DVMRP) and generic routing encapsulation (GRE) support—access side and server side	8.5	9.1	9.3
IEEE 802.1ag Ethernet OAM Continuity Check protocol	8.5	9.1	9.3

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
IEEE 802.1ag Ethernet OAM Linktrace protocol	9.0	9.1	9.3
IEEE 802.1ag Ethernet OAM Loopback protocol	9.1	9.1	9.3
Firewall filters	8.5	9.1	9.3
Flexible Ethernet encapsulation	8.5	9.1	9.3
Graceful Routing Engine Switchover (GRES)	8.5	9.1	9.3
Ingress hierarchical quality of service (HQoS) shaping and scheduling:	9.0	9.1	9.3
<ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 			

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Intermediate System-to-Intermediate System (IS-IS)	8.5	9.1	9.3
IPv4	8.5	9.1	9.3
IP multicast	8.5	9.1	9.3
IPv6	8.5	9.1	9.3
IPv6 multicast	8.5	9.1	9.3
IPv6 Neighbor Discovery	8.5	9.1	9.3
Layer 2 frame filtering	8.5	9.1	9.3
IEEE 802.3ad link aggregation	8.5	9.1	9.3
Link Aggregation Control Protocol (LACP)	8.5	9.1	9.3

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Local loopback	8.5	9.1	9.3
MAC learning, policing, accounting, and filtering	8.5	9.1	9.3
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) (part of IEEE 802.1Q VLANs)	8.5	9.1	9.3
Multiple tag protocol identifiers (TPIDs)	8.5	9.1	9.3
Multiprotocol Label Switching (MPLS)	8.5	9.1	9.3
IEEE 802.3ah OAM	8.5	9.1	9.3
<ul style="list-style-type: none"> • Discovery and link monitoring • Fault signaling and detection • Remote loopback 			
Multitopology Routing (MTR)	9.0	9.1	9.3

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Open Shortest Path First (OSPF)	8.5	9.1	9.3
Packet mirroring	8.5	9.1	9.3
Quality of service (QoS) per port:	8.5	9.1	9.3
	<ul style="list-style-type: none"> • 8 queues per port • Shaping at port level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 		

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Quality of service (QoS) per virtual LAN (VLAN):	8.5	9.1	9.3
<ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking • Shaping at queue and port level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 			
Quality of service (QoS) queuing per virtual LAN (VLAN)	8.5	9.1	9.3
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)	8.5	9.1	9.3

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
Per-VLAN Spanning Tree (PVST)+	9.0	9.1	9.3
RSVP	8.5	9.1	9.3
Routing Information Protocol (RIP)	8.5	9.1	9.3
SNMP	8.5	9.1	9.3
IEEE 802.1D Spanning Tree Protocol (STP)	8.5	9.1	9.3
Subscriber Management:	9.4	9.4	9.4
<p>NOTE: Starting in Junos OS Release 15.1R4, MS-DPCs are not supported for subscriber management on MX Series routers.</p>			
<ul style="list-style-type: none"> Access Node Control Protocol (ANCP) 	9.4	9.4	9.4

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
• Dynamic profiles	9.2	9.2	9.2
• Dynamic VLANs	9.5	9.5	9.5
• Enhanced Dynamic Host Configuration Protocol (DHCP) local server	9.3	9.3	9.3
• Enhanced DHCP relay	9.3	9.3	9.3
• Firewall filters	9.2	9.2	9.2
• Internet Group Management Protocol (IGMP)	9.2	9.2	9.2
• QoS	9.2	9.2	9.2
• Subscriber Secure Policy	9.4	9.4	9.4

Table 35: Protocols and Applications Supported by the Enhanced Queuing IP Services DPCs (DPCE-R-Q) (Continued)

Protocol or Application	First Junos OS Release Supported by DPC Model Number (DPC Name)		
	DPCE-R-Q-4XGE-XFP	DPCE-R-Q-20GE-SFP	DPCE-R-Q-20GE-2XGE
	DPCE-R-Q-40GE-SFP	Enhanced Queuing IP Services DPC	Enhanced Queuing IP Services Multi-Rate DPC
<ul style="list-style-type: none"> VLAN demux 	-	-	-
Two-Way Active Measurement Protocol (TWAMP)	9.5	9.5	9.5
IEEE 802.1Q VLANs:	8.5	9.1	9.3
<ul style="list-style-type: none"> VLAN stacking and rewriting Channels defined by two stacked VLAN tags Flexible VLAN tagging IP service for nonstandard TPID and stacked VLAN tags 			
Virtual private LAN service (VPLS)	8.5	9.1	9.3
Virtual private network (VPN)	8.5	9.1	9.3
Virtual Router Redundancy Protocol (VRRP) for IPv4	8.5	9.1	9.3

RELATED DOCUMENTATION

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\) | 420](#)

[Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs \(DPCE-X-Q\) | 438](#)

[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\) | 445](#)

Protocols and Applications Supported by Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q)

Table 36 on page 438 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, and MX960 Enhanced Queuing Ethernet Services DPCs. A dash indicates that the protocol or application is not supported.

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
Access Node Control Protocol (ANCP)	9.4
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	8.5
Bidirectional Forwarding Detection protocol (BFD)	8.5
Border Gateway Protocol (BGP)	8.5
BGP/Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	8.5

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
Distance Vector Multicast Routing Protocol (DVMRP) and generic routing encapsulation (GRE) support—access side and server side	8.5
IEEE 802.1ag Ethernet OAM Continuity Check protocol	8.5
IEEE 802.1ag Ethernet OAM Linktrace protocol	9.0
IEEE 802.1ag Ethernet OAM Loopback protocol	9.1
Firewall filters	8.5 (Limited filter terms)
Flexible Ethernet encapsulation	8.5
Graceful Routing Engine Switchover (GRES)	8.5
Ingress hierarchical quality of service (HQoS) shaping and scheduling: <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 	9.0
Intermediate System-to-Intermediate System (IS-IS)	8.5
IPv4 (No BGP)	8.5

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
IP multicast (No BGP)	8.5
IPv6 (No BGP)	8.5
IPv6 multicast (No BGP)	8.5
IPv6 Neighbor Discovery (No BGP)	8.5
Layer 2 frame filtering	8.5
IEEE 802.3ad link aggregation	8.5
Link Aggregation Control Protocol (LACP)	8.5
Local loopback	8.5
MAC learning, policing, accounting, and filtering	8.5
IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) (part of IEEE 802.1Q VLANs)	8.5
Multiple tag protocol identifiers (TPIDs)	8.5
Multiprotocol Label Switching (MPLS)	8.5

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
IEEE 802.3ah OAM	8.5
<ul style="list-style-type: none"> • Discovery and link monitoring • Fault signaling and detection • Remote loopback 	
Multitopology Routing (MTR)	9.0
Open Shortest Path First (OSPF)	8.5
Packet mirroring	8.5
Quality of service (QoS) per port:	8.5
<ul style="list-style-type: none"> • 8 queues per port • Shaping at port level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 	
Shaping at queue level	-

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
Quality of service (QoS) per virtual LAN (VLAN):	8.5
<ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking • Shaping at port level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Random early detection (RED) • Weighted random early detection (WRED) 	
Shaping at queue level	-
Quality of service (QoS) queuing per virtual LAN (VLAN)	8.5
IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)	8.5
Per-VLAN Spanning Tree (PVST)+	9.0
Remote loopback	8.5
RSVP	8.5

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
Routing Information Protocol (RIP)	8.5
SNMP	8.5
IEEE 802.1D Spanning Tree Protocol (STP)	8.5
Subscriber Management:	9.4
Starting in Junos OS Release 15.1R4, MS-DPCs are not supported for subscriber management on MX Series routers.	
• Access Node Control Protocol (ANCP)	9.4
• Dynamic profiles	9.2
• Dynamic VLANs	9.5
• Enhanced Dynamic Host Configuration Protocol (DHCP) local server	9.3
• Enhanced DCHP relay	9.3
• Firewall filters	9.2
• Internet Group Management Protocol (IGMP)	9.2

Table 36: Protocols and Applications Supported by the Enhanced Queuing Ethernet Services DPCs (DPCE-X-Q) (Continued)

Protocol or Application	DPCE-X-Q-4XGE-XFP DPCE-X-Q-40GE-SFP (Enhanced Queuing Ethernet Services DPC)
<ul style="list-style-type: none"> QoS 	9.2
<ul style="list-style-type: none"> Subscriber Secure Policy 	9.4
<ul style="list-style-type: none"> VLAN demux 	-
Two-Way Active Measurement Protocol (TWAMP)	9.5
IEEE 802.1Q VLANs:	8.5
<ul style="list-style-type: none"> VLAN stacking and rewriting Channels defined by two stacked VLAN tags Flexible VLAN tagging IP service for nonstandard TPID and stacked VLAN tags 	
Virtual private LAN service (VPLS)	8.5
Virtual private network (VPN)	8.5 (L2 VPN only)
Virtual Router Redundancy Protocol (VRRP) for IPv4	8.5

RELATED DOCUMENTATION

[DPCs Supported on MX240, MX480, and MX960 Routers](#) | 7

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\) | 420](#)

[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\) | 428](#)

[Protocols and Applications Supported by the Multiservices DPC \(MS-DPC\) | 445](#)

Protocols and Applications Supported by the Multiservices DPC (MS-DPC)

Table 37 on page 445 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, and MX960 Multiservices DPCs. A dash indicates that the protocol or application is not supported.

NOTE: The maximum number of supported MS-DPCs is as follows except where noted in [Table 37 on page 445](#):

- MX240 router: 2
- MX480 router: 4
- MX960 router: 8

Table 37: Protocols and Applications Supported by the Multiservices DPC (MS-DPC)

Protocol or Application	MS-DPC
Accepts traffic destined for GRE tunnels	9.3
Active flow monitoring exports cflowd version 5 and version 8 records	9.3
Active flow monitoring exports flow monitoring version 9 records, based on RFC 3954	9.3
Graceful Routing Engine Switchover (GRES)	9.4

Table 37: Protocols and Applications Supported by the Multiservices DPC (MS-DPC) (Continued)

Protocol or Application	MS-DPC
GRE dont fragment	9.3
GRE Key	9.3
GRE reassembly	9.3
IP Security (IPSec) encryption	9.3
Network Address Translation (NAT) for IP addresses	9.3
NOTE: The MX960 supports 8 MS-DPCs using this feature.	
NAPT - Preserve parity	15.1
NAPT - Preserve range	15.1
No translation	15.1
Twice NAT	15.1
Packet-triggered dynamic subscribers and policy control (PTSP)	10.2
NOTE: Starting in Junos OS Release 13.1R1, the packet-triggered subscribers and policy control (PTSP) feature is no longer supported.	
Port Address Translation (PAT) for port numbers	9.3
Real-time Performance Monitoring (RPM)	9.3

Table 37: Protocols and Applications Supported by the Multiservices DPC (MS-DPC) (Continued)

Protocol or Application	MS-DPC
Stateful firewall with packet inspection: detects SYN attacks, ICMP and UDP floods, and ping-of-death attacks	9.3
NOTE: The MX960 supports 8 MS-DPCs using this feature.	
Tunnel services:	
<ul style="list-style-type: none"> GRE unicast tunneling-Supports GRE fragmentation 	9.3
<ul style="list-style-type: none"> IP-IP unicast tunneling 	9.4
<ul style="list-style-type: none"> Multicast tunneling 	9.4
<ul style="list-style-type: none"> Protocol Independent Multicast (PIM) sparse mode unicast tunneling 	9.4
<ul style="list-style-type: none"> Virtual loopback tunneling (VT) 	9.4
Voice over IP (VoIP) services:	10.2
<ul style="list-style-type: none"> Border Gateway Function (BGF) using external H.248/Ia control Integrated Multi-Service Gateway (IMSG)-Session Border Controller 	

RELATED DOCUMENTATION

[DPCs Supported on MX240, MX480, and MX960 Routers | 7](#)

[Protocols and Applications Supported by DPCs and Enhanced DPCs \(DPC and DPCE-R\) | 409](#)

[Protocols and Applications Supported by Enhanced Ethernet Services DPCs \(DPCE-X\) | 420](#)

[Protocols and Applications Supported by Enhanced Queuing IP Services DPCs \(DPCE-R-Q\) | 428](#)

SPC Protocol and Application Support for MX240, MX480, and MX960

IN THIS CHAPTER

- [Protocols and Applications Supported by MX-SPC3 Services Card | 449](#)

Protocols and Applications Supported by MX-SPC3 Services Card

[Table 38 on page 449](#) contains the first Junos OS Release protocols and applications supported by the MX-SPC3 Services Card on the MX240, MX480, and MX960 routers.

Table 38: Protocols and Applications Supported by the MX-SPC3 Services Card

Software Feature	First Supported Junos OS Release
Stateful firewall	19.3R2
Network Address Translation (NAT) for IP addresses	19.3R2
Port Address Translation (PAT) for port numbers	19.3R2
Intrusion Detection Service (IDS)	19.3R2
Class of Service (CoS)	19.3R2
<i>Graceful Routing Engine Switchover (GRES)</i>	19.3R2

RELATED DOCUMENTATION

[MX-SPC3 Services Card Overview and Support on MX240, MX480, and MX960 Routers | 13](#)

[MX-SPC3 Services Card | 132](#)

MPC Protocol and Application Support for MX240, MX480, MX960, MX2010, MX2020, and MX10003

IN THIS CHAPTER

- Protocols and Applications Supported on MPCs for MX Series Routers | 451
- Protocols and Applications Supported on the MPC1E for MX Series Routers | 473
- Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E | 483
- Protocols and Applications Supported by the MPC3E on MX Series Routers | 499
- Protocols and Applications Supported on the MPC4E for MX Series Routers | 515
- Protocols and Applications Supported by the MPC5E for MX Series Routers | 530
- Protocols and Applications Supported by the MPC6E for MX2000 Routers | 543
- Protocols and Applications Supported by the MPC7E for MX Series Routers | 554
- Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers | 570
- Protocols and Applications Supported by the MS-MIC and MS-MPC | 584
- Protocols and Applications Supported by the MX10003 MPC (Multi-Rate) on the MX10003 Router | 587
- Protocols and Applications Supported by the JNP10K-LC2101 on the MX10008 and MX10016 Routers | 598
- Protocols and Applications Supported by the MPC10E | 615
- Protocols and Applications Supported by the MX2K-MPC11E | 634

Protocols and Applications Supported on MPCs for MX Series Routers

Table 39 on page 452 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, MX960, MX2010, and MX2020 MPCs.

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Bidirectional Forwarding Detection protocol (BFD)	10.0R2	10.2	10.1	10.2	10.1	10.1
Border Gateway Protocol (BGP)	10.0R2	10.2	10.1	10.2	10.1	10.1
BGP/Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	10.0R2	10.2	10.1	10.2	10.1	10.1
Distance Vector Multicast Routing Protocol (DVMRP) and generic routing encapsulation (GRE) support—access side and server side	10.0R2	10.2	10.1	10.2	10.1	10.1
Distributed denial-of-service (DDoS) protection	11.2	11.2	11.2	11.2		11.2

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
IEEE 802.1ag Ethernet OAM Continuity Check protocol	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)
IEEE 802.1ag Ethernet OAM Linktrace protocol	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)
IEEE 802.1ag Ethernet OAM Loopback protocol	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)	10.2 (bridge family supported in 10.4)
Firewall filters	10.0R2	10.2	10.1	10.2	10.1	10.1
Flexible Ethernet encapsulation	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Graceful Routing Engine Switchover (GRES)	10.0R2	10.2	10.1	10.2	10.1	10.1
Ingress Differentiated Services code point (DSCP) rewrite	10.0R2	10.2	10.1	10.2	10.1	10.1
Ingress hierarchical quality-of-service (HQoS) shaping and scheduling: <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 	12.1R3	12.1R3	12.1R3	12.1R3	12.1R3	12.1R3
Intelligent oversubscription	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
IPv6 multicast	10.2	10.2	10.2	10.2	10.2	10.2
IPv6 Neighbor Discovery	10.2	10.2	10.2	10.2	10.2	10.2
Label Distribution Protocol (LDP)	10.0R2	10.2	10.1	10.2	10.1	10.1
Labeled switched paths (LSPs) including accounting, policers, and filtering	10.0R2	10.2	10.1	10.2	10.1	10.1
LAN-PHY mode	10.0R2	10.2	10.1	10.2	10.1	10.1
Layer 2 frame filtering	10.0R2	10.2	10.1	10.2	10.1	10.1
Layer 2 Tunneling Protocol (L2TP): (MX2010, MX2020: 12.3R4, 13.2R2, 13.3)						

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
• L2TP access concentrator (LAC)	10.4	10.4	10.4	10.4	10.4	10.4
• L2TP network server (LNS)	11.4	11.4	11.4	11.4	11.4	11.4
• LNS inline service support with CoS per-session shaping	11.4	11.4	11.4	11.4	11.4	11.4
• LNS inline service support without CoS per-session shaping	11.4	11.4	11.4	11.4	11.4	11.4
• Peer interface	-	11.4	11.4	11.4	11.4	11.4
• Inline IP reassembly	13.1	13.1	13.1	13.1	13.1	13.1
IEEE 802.3ad link aggregation	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Link Aggregation Control Protocol (LACP)	10.0R2	10.2	10.1	10.2	10.1	10.1
Local loopback	10.0R2	10.2	10.1	10.2	10.1	10.1
MAC learning, policing, accounting, and filtering	10.0R2	10.2	10.1	10.2	10.1	10.1
Mobile IP	-	-	-	-	-	-
<i>Multi-chassis link aggregation</i>	11.1	11.1	11.1	11.1	11.1	11.1
Multiple Tag Protocol Identifiers (TPIDs)	10.0R2	10.2	10.1	10.2	10.1	10.1
Multiprotocol Label Switching (MPLS)	10.0R2	10.2	10.1	10.2	10.1	10.1
Nonstop active routing (NSR)	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
IEEE 802.3ah OAM <ul style="list-style-type: none"> • Discovery and link monitoring • Fault signaling and detection • Remote loopback 	11.1	11.1	11.1	11.1	11.1	11.1
Multi-topology routing (MTR)	10.0R2	10.2	10.1	10.2	10.1	10.1
Open Shortest Path First (OSPF)	10.0R2	10.2	10.1	10.2	10.1	10.1
Packet mirroring	10.0R2	10.2	10.1	10.2	10.1	10.1
IEEE 802.1ah provider backbone bridges (PBB)	-	-	-	-	-	-

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Quality of service (QoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate configuration at the traffic-control-profile level • Excess-rate and excess-priority configuration at the queue level • Shaping at port level • Shaping at queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Tricolor marking 	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
<ul style="list-style-type: none"> Weighted random early detection (WRED) 						
Quality of service (QoS) per virtual LAN (VLAN):						
<ul style="list-style-type: none"> Accounting, filtering, and policing 	10.0R2	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> IEEE 802.1p rewrite 	10.0R2	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Classification 	10.0R2	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Excess-rate configuration at the traffic-control-profile level 	-	-	-	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
<ul style="list-style-type: none"> Excess-rate and excess-priority configuration at the queue level 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Tricolor marking 	10.0R2	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Shaping at the queue level 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Scheduling of queues based on weighted round-robin (WRR) per priority class 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Weighted random early detection (WRED) 	-	-	-	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Quality of service (QoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:						
<ul style="list-style-type: none"> Accounting, filtering, and policing 	-	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> IEEE 802.1p rewrite 	-	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Classification 	-	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Excess-rate configuration at the traffic-control-profile level 	-	-	-	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
<ul style="list-style-type: none"> Excess-rate and excess-priority configuration at the queue level 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Tricolor marking 	-	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> Shaping at the queue level 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Scheduling of queues based on weighted round-robin (WRR) per priority class 	-	-	-	10.2	10.1	10.1
<ul style="list-style-type: none"> Weighted random early detection (WRED) 	-	-	-	10.2	10.1	10.1
RSVP	10.0R2	10.2	10.1	10.2	10.1	10.1
RIP	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Subscriber management and services: (MX2010, MX2020: 12.3R4, 13.2R2, 13.3)						
<ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs 	-	10.2	10.1	10.2	10.1	10.1
<ul style="list-style-type: none"> • Aggregated Ethernet over dynamic VLANs 	-	10.2	10.2	10.2	10.2	10.2
<ul style="list-style-type: none"> • Access Node Control Protocol (ANCP) and ANCP agent 	-	10.2	10.2	10.2	10.2	10.2
<ul style="list-style-type: none"> • DHCP access model 	-	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
<ul style="list-style-type: none"> Static and dynamic PPPoE subscriber interfaces 	-	10.2	10.1	10.2	10.1	10.1
Synchronous Ethernet (SyncE)	11.2R4	12.3 with SCBE and later	12.3 with SCBE and later	12.3 with SCBE and later	12.3 with SCBE and later	12.3 with SCBE and later

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Tunnel services: <ul style="list-style-type: none"> • GRE unicast tunneling- Supports GRE fragmentation • IP-IP unicast tunneling • Multicast tunneling • Protocol Independent Multicast (PIM) sparse mode unicast tunneling • Virtual loopback tunneling (VT) 	10.0R2	10.2	10.1	10.2	10.1	10.1
Two-Way Active Measurement Protocol (TWAMP)	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
IEEE 802.1Q VLANs: <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	10.0R2	10.2	10.1	10.2	10.1	10.1
Virtual Chassis redundancy	11.2	11.2	11.2	11.2	11.2	11.2
Virtual private LAN service (VPLS)	10.0R2	10.2	10.1	10.2	10.1	10.1
Virtual private network (VPN)	10.0R2	10.2	10.1	10.2	10.1	10.1

Table 39: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPCs (Continued)

Protocol or Application	First Junos OS Release Supported by MPC Model Number (MPC Name)					
	MPC-3D-16XGE-SFPP (16x10GE MPC)	MX-MPC1-3D (MPC1)	MX-MPC2-3D (MPC2)	MX-MPC1-3D-Q (MPC1 Q)	MX-MPC2-3D-Q (MPC2 Q)	MX-MPC2-3D-EQ (MPC2 EQ)
Virtual Router Redundancy Protocol (VRRP) for IPv4	10.0R2	10.2	10.1	10.2	10.1	10.1
VRRP over integrated routing and bridging (IRB) on multichassis link aggregation	13.1	13.1	13.1	13.1	13.1	13.1
WAN-PHY mode	-	10.2	10.2	10.2	10.2	10.2

RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

ANCP and the ANCP Agent Overview

Understanding BGP

Understanding MPLS Inter-AS Link Protection

IEEE 802.1ag OAM Connectivity Fault Management Overview

Understanding IGMP

Understanding IPv6

Understanding LDP-IGP Synchronization

Protocols and Applications Supported on the MPC1E for MX Series Routers

Table 40 on page 473 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPCEs).

NOTE: The MX2010 and M2020 routers support protocols and applications in Junos OS 12.3 and later. Features added after the Junos OS 12.3 release are supported on the MX2010 and MX2020 routers in the release indicated.

A dash indicates that the protocol or application is not supported.

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Access Node Control Protocol (ANCP)	11.2R4	11.2R4
Accepts traffic destined for GRE tunnels or DVMRP (IP-in-IP) tunnels	11.2R4	11.2R4
Bidirectional Forwarding Detection protocol (BFD)	11.2R4	11.2R4
Border Gateway Protocol (BGP)	11.2R4	11.2R4
BGP/Multiprotocol Label Switching (MPLS) virtual private networks (VPNs)	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Distance Vector Multicast Routing Protocol (DVMRP) and generic routing encapsulation (GRE) support—access side and server side	11.2R4	11.2R4
IEEE 802.1ag Ethernet OAM Continuity Check protocol	11.2R4	11.2R4
IEEE 802.1ag Ethernet OAM Linktrace protocol	11.2R4	11.2R4
IEEE 802.1ag Ethernet OAM Loopback protocol	11.2R4	11.2R4
Firewall filters	11.2R4	11.2R4
Flexible Ethernet encapsulation	11.2R4	11.2R4
Graceful Routing Engine Switchover (GRES)	11.2R4	11.2R4
Ingress Differentiated Services code point (DSCP) rewrite	11.2R4	11.2R4
Hierarchical quality-of-service (HQoS)	-	12.1R3
Intelligent oversubscription	11.2R4	11.2R4
Integrated routing and bridging (IRB)	11.2R4	11.2R4
Intermediate System-to-Intermediate System (IS-IS)	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Internet Group Management Protocol (IGMP) (excluding snooping)	11.2R4	11.2R4
Internet Group Management Protocol (IGMP) snooping	11.2R4	11.2R4
IPv4	11.2R4	11.2R4
IP multicast	11.2R4	11.2R4
IPv6	11.2R4	11.2R4
IPv6 MLD	11.2R4	11.2R4
IPv6 multicast	11.2R4	11.2R4
IPv6 Neighbor Discovery	11.2R4	11.2R4
Label Distribution Protocol (LDP)	11.2R4	11.2R4
Labeled switched paths (LSPs) including accounting, policers, and filtering	11.2R4	11.2R4
LAN-PHY mode	11.2R4	11.2R4
Layer 2 frame filtering	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Layer 2 Tunneling Protocol (L2TP):		
<ul style="list-style-type: none"> • L2TP access concentrator (LAC) 	11.3	11.3
<ul style="list-style-type: none"> • L2TP network server (LNS) 	11.4	11.4
<ul style="list-style-type: none"> • LNS inline service support with CoS per-session shaping 	11.4	11.4
<ul style="list-style-type: none"> • LNS inline service support without CoS per-session shaping 	11.4	11.4
<ul style="list-style-type: none"> • Peer interface 	11.4	11.4
<ul style="list-style-type: none"> • Inline IP Reassembly 	13.1	13.1
IEEE 802.3ad link aggregation	11.2R4	11.2R4
Link Aggregation Control Protocol (LACP)	11.2R4	11.2R4
Local loopback	11.2R4	11.2R4
MAC learning, policing, accounting, and filtering	11.2R4	11.2R4
Mobile IP	-	-

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
<i>Multi-chassis link aggregation</i>	11.2R4	11.2R4
Multiple Tag Protocol Identifiers (TPIDs)	11.2R4	11.2R4
Multiprotocol Label Switching (MPLS)	11.2R4	11.2R4
Nonstop active routing (NSR)	11.2R4	11.2R4
IEEE 802.3ah OAM <ul style="list-style-type: none"> • Discovery and link monitoring • Fault signaling and detection • Remote loopback 	11.2R4	11.2R4
Multitopology routing	11.2R4	11.2R4
OSPF	11.2R4	11.2R4
Packet mirroring	11.2R4	11.2R4
Per-unit scheduling	12.1R3	12.1R3
Precision Time Protocol (PTP) or IEEE 1588v2	12.3	12.3
IEEE 802.1ah provider backbone bridges (PBB)	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Quality of service (QoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate configuration at the traffic-control-profile level • Excess-rate and excess-priority configuration at the queue level • Shaping at port level • Shaping at queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Tricolor marking • Weighted random early detection (WRED) 	11.2R4	11.2R4
Quality of service (QoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate configuration at the traffic-control-profile level 	11.2R4 11.2R4 11.2R4 -	11.2R4 11.2R4 11.2R4 11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
<ul style="list-style-type: none"> Excess-rate and excess-priority configuration at the queue level 	-	11.2R4
<ul style="list-style-type: none"> Tricolor marking 	11.2R4	11.2R4
<ul style="list-style-type: none"> Shaping at the queue level 	-	11.2R4
<ul style="list-style-type: none"> Scheduling of queues based on weighted round-robin (WRR) per priority class 	-	11.2R4
<ul style="list-style-type: none"> Weighted random early detection (WRED) 	-	11.2R4
Quality of service (QoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:		
<ul style="list-style-type: none"> Accounting, filtering, and policing 	11.2R4	11.2R4
<ul style="list-style-type: none"> IEEE 802.1p rewrite 	11.2R4	11.2R4
<ul style="list-style-type: none"> Classification 	11.2R4	11.2R4
<ul style="list-style-type: none"> Excess-rate configuration at the traffic-control-profile level 	-	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
<ul style="list-style-type: none"> Excess-rate and excess-priority configuration at the queue level 	-	11.2R4
<ul style="list-style-type: none"> Tricolor marking 	11.2R4	11.2R4
<ul style="list-style-type: none"> Shaping at the queue level 	-	11.2R4
<ul style="list-style-type: none"> Scheduling of queues based on weighted round-robin (WRR) per priority class 	-	11.2R4
<ul style="list-style-type: none"> Weighted random early detection (WRED) 	-	11.2R4
RSVP	11.2R4	11.2R4
RIP	11.2R4	11.2R4
SNMP	11.2R4	11.2R4
Spanning Tree Protocols: <ul style="list-style-type: none"> IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1s Multiple Spanning Tree Protocol Per-VLAN Spanning Tree (PVST)+ IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) 	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Subscriber Management:		
<ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Aggregated Ethernet over dynamic VLANs 	11.2R4	11.2R4
<ul style="list-style-type: none"> • DHCP access model 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Dynamic adjustment of shapers 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Dynamic PPPoE subscriber interface creation based on PPPoE service name table configuration 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Dynamic profiles 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Dynamic shaping, scheduling, and queuing 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Dynamic VLANs 	11.2R4	11.2R4
<ul style="list-style-type: none"> • Enhanced subscriber management 	15.1R4	15.1R4
<ul style="list-style-type: none"> • Static and dynamic PPPoE subscriber interfaces 	11.2R4	11.2R4
Synchronous Ethernet (SyncE)	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Tunnel services: <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) • GRE unicast tunneling-Supports GRE fragmentation • IP-IP unicast tunneling • Multicast tunneling • Protocol Independent Multicast (PIM) sparse mode unicast tunneling • Virtual loopback tunneling (VT) 	11.2R4	11.2R4
Two-Way Active Measurement Protocol (TWAMP)	11.2R4	11.2R4
IEEE 802.1Q VLANs: <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	11.2R4	11.2R4
Virtual Chassis redundancy	11.2R4	11.2R4
Virtual private LAN service (VPLS)	11.2R4	11.2R4
Virtual private network (VPN)	11.2R4	11.2R4

Table 40: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 Enhanced MPCs (MPC1Es) (Continued)

First Junos OS Release Supported by MPC1E Model Number (MPCE Name)		
Protocol or Application	MX-MPC1E-3D (MPC1E)	MX-MPC1E-3D-Q (MPC1E Q)
Virtual Router Redundancy Protocol (VRRP) for IPv4	11.2R4	11.2R4
WAN-PHY mode	11.2R4	11.2R4

RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E

Table 41 on page 484 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, MX960, MX2010, and MX2020 MPC2E.

A dash indicates that the protocol or application is not supported.

NOTE: The MX2010 and M2020 routers support protocols and applications in Junos OS 12.3 and later. Features added after the Junos OS 12.3 release are supported on the MX2010 and MX2020 routers in the release indicated.

A dash indicates that the protocol or application is not supported.

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<i>Access Node Control Protocol (ANCP)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Border Gateway Protocol (BGP)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
BGP/MPLS virtual private networks (VPNs)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>DVMRP</i> and GRE support—access side and server side	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<i>Understanding How Dynamic Power Management Enables Better Utilization of Power</i>	—	—	—	—	15.1	15.1
<i>Flexible Queuing Mode</i> NOTE: Flexible queuing mode is supported only on non-HQoS variants.	—	—	—	—	15.1	—
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Firewall filters	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Flexible Ethernet encapsulation</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<i>Graceful Routing Engine Switchover (GRES)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Ingress Differentiated Services code point (DSCP) rewrite	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Ingress hierarchical quality-of-service (HQoS) shaping and <i>hierarchical-scheduler</i> : <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • Virtual LAN (VLAN) level • Port level 	-	-	-	-	15.1R1	15.1R1
Hierarchical quality-of-service (HQoS)	-	12.1R3	12.1R3	-	-	15.1R1
<i>Intelligent Oversubscription on MIC and MPC Interfaces Overview</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Integrated routing and bridging (IRB)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
Unified <i>In-service software upgrade (Unified ISSU)</i>	11.2R1	11.2R1	11.2R1	11.2R1	17.1R1	17.1R1
<i>IS-IS</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Internet Group Management Protocol (IGMP) (excluding snooping)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Internet Group Management Protocol (IGMP) snooping	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IPv4	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IP multicast	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IPv6	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IPv6 MLD	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IPv6 multicast	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IPv6 Neighbor Discovery	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
Label Distribution Protocol (LDP)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
LAN-PHY mode	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Layer 2 frame filtering	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Layer 2 Tunneling Protocol (L2TP):					14.1R4	14.1R4
• L2TP access concentrator (LAC)	11.3	11.3	11.3	12.2	14.1R4	14.1R4
• L2TP network server (LNS)	11.4	11.4	11.4	12.2	14.1R4	14.1R4
• LNS inline service support with CoS per-session shaping	11.4	11.4	11.4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<ul style="list-style-type: none"> • LNS inline service support without CoS per-session shaping 	11.4	11.4	11.4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Peer interface 	11.4	11.4	11.4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Inline IP Reassembly 	13.1	13.1	13.1	13.1	14.1R4	14.1R4
<i>Link aggregation (IEEE 802.3ad)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Link Aggregation Control Protocol (LACP)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Local loopback	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>MAC learning, policing, accounting, and filtering</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Mobile IP	-	-	-	-		
<i>Multi-chassis link aggregation</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
Multiple Tag Protocol Identifiers (TPIDs)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Multiprotocol Label Switching (MPLS)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Nonstop active routing (NSR)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
IEEE 802.3ah OAM <ul style="list-style-type: none"> Discovery and link monitoring Fault signaling and detection Remote loopback 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Multitopology routing	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
OSPF	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Packet mirroring	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Precision Time Protocol (PTP) or IEEE 1588v2	12.3	12.3	12.3	12.2	15.1R2	15.1R2

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
IEEE 802.1ah provider backbone bridges (PBB)	-	-	-	-	-	-
Quality of service (QoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate configuration at the traffic-control-profile level • Excess-rate and excess-priority configuration at the queue level • Shaping at port level • Shaping at queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Tricolor marking • Weighted random early detection (WRED) 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Quality of service (QoS) per virtual LAN (VLAN):				-	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
• Accounting, filtering, and policing	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• IEEE 802.1p rewrite	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Classification	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Excess-rate configuration at the traffic-control-profile level	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Excess-rate and excess-priority configuration at the queue level	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Tricolor marking	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Shaping at the queue level	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
• Scheduling of queues based on weighted round-robin (WRR) per priority class	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<ul style="list-style-type: none"> Weighted random early detection (WRED) 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Quality of service (QoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:					14.1R4	14.1R4
<ul style="list-style-type: none"> Accounting, filtering, and policing 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> IEEE 802.1p rewrite 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Classification 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Excess-rate configuration at the traffic-control-profile level 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Excess-rate and excess-priority configuration at the queue level 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<ul style="list-style-type: none"> • Tricolor marking 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Shaping at the queue level 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Scheduling of queues based on weighted round-robin (WRR) per priority class 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Weighted random early detection (WRED) 	-	11.2R4	11.2R4	12.2	14.1R4	14.1R4
RSVP	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
RIP	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
SNMP	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
Spanning Tree Protocols: <ul style="list-style-type: none"> • IEEE 802.1D Spanning Tree Protocol (STP) • IEEE 802.1s Multiple Spanning Tree Protocol • Per-VLAN Spanning Tree (PVST)+ • IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Subscriber Management:					14.1R4	14.1R4
<ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Aggregated Ethernet over dynamic VLANs 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • DHCP access model 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> • Dynamic adjustment of shapers 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<ul style="list-style-type: none"> Dynamic PPPoE subscriber interface creation based on PPPoE service name table configuration 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Dynamic profiles 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Dynamic shaping, scheduling, and queuing 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Dynamic VLANs 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<ul style="list-style-type: none"> Enhanced subscriber management 	15.1R4	15.1R4	15.1R4	15.1R4	15.1R4	15.1R4
<ul style="list-style-type: none"> Static and dynamic PPPoE subscriber interfaces 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Synchronous Ethernet (SyncE)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
Tunnel services: <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) • GRE unicast tunneling- Supports GRE fragmentation • IP-IP unicast tunneling • Multicast tunneling • Protocol Independent Multicast (PIM) sparse mode unicast tunneling • Virtual loopback tunneling (VT) 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

Table 41: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC2E (Continued)

Protocol or Application	First Supported Junos OS Release					
	MX-MPC2E-3D (MPC2E)	MX-MPC2E-3D-Q (MPC2E Q)	MX-MPC2E-3D-EQ (MPC2E EQ)	MX-MPC2E-3D-P (MPC2E P)	MX-MPC2E-3D-NG (MPC2E NG)	MX-MPC2E-3D-NG-Q (MPC2E NG-Q)
<i>VLANs IEEE 802.1Q</i> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Virtual Chassis redundancy	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Virtual private LAN service (VPLS)</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
Virtual private network (VPN)	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4
WAN-PHY mode	11.2R4	11.2R4	11.2R4	12.2	14.1R4	14.1R4

RELATED DOCUMENTATION

[MX Series MPC Overview | 15](#)

[MPCs Supported by MX Series Routers | 16](#)

Protocols and Applications Supported by the MPC3E on MX Series Routers

Table 42 on page 499 lists the first supported Junos OS Release for MPC3E protocols and applications for the MX240, MX480, MX960, MX2010, and MX2020 routers. The protocols and applications support feature parity with Junos OS Release 10.4.

NOTE: The MX2010 and M2020 routers support protocols and applications in Junos OS 12.3 and later. Features added after the Junos OS 12.3 release are supported on the MX2010 and MX2020 routers in the release indicated.

A dash indicates that the protocol or application is not supported.

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3D	MPC3E-3D-NG	MPC3E-3D-NG-Q
<i>Access Node Control Protocol (ANCP)</i>	—	14.1R4	14.1R4
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	12.1	14.1R4	14.1R4
<i>Border Gateway Protocol (BGP)</i>	12.1	14.1R4	14.1R4
Bridge protocol data units (BPDUs)	12.2	14.1R4	14.1R4
BGP/MPLS virtual private networks (VPNs)	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
<p>Class of service (CoS):</p> <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Rate limit option for per-port queues • Configurable 802.1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling • Behavior aggregate (BA) classification • BA classification based on 802.1p of “payload” for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • BA DSCP classification for VPLS/CCC family 	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3D	MPC3E-3D-NG	MPC3E-3D-NG-Q
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) <p>NOTE: Fine-grained queuing and input queuing are not supported for the MPC3E-3D.</p>	12.1	14.1R4	14.1R4
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	–	14.1R4	14.1R4
<i>Distributed Denial-of-Service (DDoS) Protection</i>	12.1	14.1R4	14.1R4
<i>DVMRP</i> and GRE support—access side and server side	–	14.1R4	14.1R4
<i>Dynamic Power Management</i>	15.1	15.1	15.1
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	–	14.1R4	14.1R4
Enhanced subscriber management	–	15.1R4	15.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
<i>Ethernet Ring Protection Switching</i> with multiple G.8032 instances	–	14.1R4	14.1R4
<i>Flexible Queuing Mode</i> NOTE: Flexible queuing mode is supported only on non-HQoS variants.	15.1	15.1	15.1
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	12.2	14.1R4	14.1R4
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	12.2	14.1R4	14.1R4
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	12.2	14.1R4	14.1R4
IEEE 802.1ag Maintenance Association Intermediate Point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	12.2	14.1R4	14.1R4
IEEE 802.1ag Optional type, length, and value (TLVs) support <i>Port Status TLV and Interface Status TLV</i>	–	14.1R4	14.1R4
IEEE 802.3ah distributed periodic packet management (PPM) process , alarm indication signal (AIS), and remote defect indication (RDI)	12.2	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3D	MPC3E-3D-NG	MPC3E-3D-NG-Q
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Intelligent hierarchial policers <p>NOTE: Intelligent hierarchial policers are supported from Junos OS Release 13.3.</p> <ul style="list-style-type: none"> • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32K to 8K • Egress IEEE 802.1p multi-field (MF) and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 <p>NOTE: The packet length used for the policer included in the Layer 2 header is not supported for the MPC3E-3D in release 12.2.</p>	12.1	14.1R4	14.1R4
<i>Flexible Ethernet encapsulation</i>	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Generic Routing Encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	12.1	14.1R4	14.1R4
<i>Graceful Routing Engine Switchover (GRES)</i>	12.1	14.1R4	14.1R4
Hierarchical Quality of Service (HQoS)	—	14.1R4	14.1R4
IGMP snooping with bridging, IRB, and VPLS	—	14.1R4	14.1R4
IGMPv3 support with snooping disabled	12.1	14.1R4	14.1R4
Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i> : <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	—	14.1R4	14.1R4
<i>Inline flow monitoring</i>	12.2	14.1R4	14.1R4
<i>Intelligent Oversubscription on MIC and MPC Interfaces Overview</i>	12.1	14.1R4	14.1R4
<i>Integrated routing and bridging (IRB)</i>	12.2	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Unified <i>In-service software upgrade (Unified ISSU)</i> . NOTE: ISSU is not supported on MPC3E-NG with 14.1R4.	13.3	17.1R1	17.1R1
Interoperability with MPCs and existing DPCs	12.1	14.1R4	14.1R4
Interoperability with multiservices DPCs	12.2	14.1R4	14.1R4
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	—	14.1R4	14.1R4
IPv4	12.1	14.1R4	14.1R4
IPv4 multicast	12.1	14.1R4	14.1R4
IPv6	12.1	14.1R4	14.1R4
IPv6 MLD	12.1	14.1R4	14.1R4
IPv6 multicast	12.1	14.1R4	14.1R4
IPv6 Neighbor Discovery	12.1	14.1R4	14.1R4
<i>IS-IS</i>	12.1	14.1R4	14.1R4
ITU-T Y.1731 timestamping support on MX Series routers	—	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3D	MPC3E-3D-NG	MPC3E-3D-NG-Q
<p>Flow monitoring and services:</p> <ul style="list-style-type: none"> • Active monitoring (multiple v8 version j-flow templates) • Active monitoring (cflowed version 9 templates) • Port mirroring family VPLS, bridge CCC encapsulation (VPWS) • Packet slice for port mirroring • Inline flow monitoring on MPC3E • Flow monitoring on multiservices DPCs <p>NOTE: Flow monitoring on Multiservices DPCs is not supported for the MPC3E-3D in release 12.2..</p>	12.2	14.1R4	14.1R4
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3D	MPC3E-3D-NG	MPC3E-3D-NG-Q
Layer 2 features: <ul style="list-style-type: none"> • Trunk ports • Layer 2 support for MX Series Virtual Chassis • Layer 2 and Layer 2.5, IRB and Spanning Tree Protocols (xSTP) • IEEE 802.1ad provider bridges • Layer 2 protocol tunneling (L2PT) support • Layer 2 Tunneling Protocol (L2TP) • Multi-chassis LAG—active/active and active/standby • Multi-chassis LAG—active/active with IGMP snooping • Link aggregation group (LAG)—VLAN-CCC encapsulation <p>NOTE: LAG features and IGMP snooping with bridging, IRB, and VPLS are not supported for the MPC3E-3D in release 12.2.</p>	12.2	14.1R4	14.1R4
Layer 2 VPN interfaces support VLAN ID list	12.1	14.1R4	14.1R4
Label Distribution Protocol (<i>LDP</i>)	12.1	14.1R4	14.1R4
<i>Link aggregation (IEEE 802.3ad)</i>	12.1	14.1R4	14.1R4
<i>Link Aggregation Control Protocol (LACP)</i>	12.1	14.1R4	14.1R4
<i>Link Layer Discovery Protocol (LLDP)</i>	—	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Local loopback	12.1	14.1R4	14.1R4
<i>MAC learning, policing, accounting, and filtering</i>	12.1	14.1R4	14.1R4
Mobile IP	—	14.1R4	14.1R4
Multichassis link aggregation	—	14.1R4	14.1R4
Multiple Tag Protocol Identifiers (TPIDs)	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • Point to multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet) • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	12.1	14.1R4	14.1R4
MPLS node protection, link protection, and statistics for static LSPs	12.1	14.1R4	14.1R4
<i>mvrp</i>	—	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
<i>Multitopology routing</i>	12.1	14.1R4	14.1R4
Nonstop active routing (NSR)	12.1	14.1R4	14.1R4
<i>OSPF</i>	12.1	14.1R4	14.1R4
Packet mirroring	12.2	14.1R4	14.1R4
Precision Time Protocol (PTP) (IEEE 1588)	12.2	17.2R1	17.2R1
IEEE 802.1ah Provider Bridging (PBB)	—	14.1R4	14.1R4
<i>RSVP</i>	12.1	14.1R4	14.1R4
<i>RIP</i>	12.1	14.1R4	14.1R4
<i>SNMP</i>	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • Spanning-Tree Protocols (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	12.2	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
<p><i>Subscriber management and services</i> (MX2010, MX2020: 12.3R4, 13.2R2, 13.3):</p> <ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs • Aggregated Ethernet over dynamic VLANs • <i>ANCP and the ANCP Agent Overview</i> • DHCP access model • Dynamic adjustment of shapers • Dynamic PPPoE subscriber interface creation based on PPPoE service name tables • Dynamic profiles • Dynamic shaping, scheduling, and queuing • Dynamic VLANs • Per unit scheduling • Static and dynamic PPPoE subscriber interfaces 	-	14.1R4	14.1R4
Synchronous Ethernet	13.2	14.1R4	14.1R4
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	—	14.1R4	14.1R4
<p>Tunnel services</p> <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (*Continued*)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Unified in-service software upgrade (ISSU) NOTE: ISSU is not supported on MPC3E-NG with 14.1R4.	13.3	17.1R1	17.1R1
Unnumbered Ethernet Interface	12.1	14.1R4	14.1R4
<i>VLANs IEEE 802.1Q:</i> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	12.1	14.1R4	14.1R4
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services	13.2R1	14.1R4	14.1R4
<i>Virtual private LAN service (VPLS):</i> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	12.1	14.1R4	14.1R4

Table 42: Protocols and Applications Supported by MPC3E Cards for MX Series Routers (Continued)

Protocol or Application	First Supported Junos OS Release		
	MPC3E-3 D	MPC3E- 3D-NG	MPC3E- 3D-NG-Q
Virtual private network (VPN)	12.1	14.1R4	14.1R4
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	12.1	14.1R4	14.1R4
VPLS packet flooding to the right set of interfaces across mesh groups	—	14.1R4	14.1R4
WAN-PHY mode	12.2	14.1R4	14.1R4

RELATED DOCUMENTATION

[MPC3E | 174](#)

[MICs Supported by MX Series Routers | 27](#)

Protocols and Applications Supported on the MPC4E for MX Series Routers

Table 43 on page 516 contains the first Junos OS Release support for protocols and applications on the MPC4E. The protocols and applications support feature parity with Junos OS Release 12.2. A dash indicates that the protocol or application is not supported.

Table 43: Protocols and Applications Supported by the MX Series MPC4E

Protocol or Application	First Supported Junos OS Release
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	12.3R2
<i>Border Gateway Protocol (BGP)</i>	12.3R2
Bridge protocol data units (BPDUs)	12.3R2
Class of service (CoS): <ul style="list-style-type: none"> • Behavior Aggregate (BA) classification • Forwarding class loss priority through logical tunnels (LT) • Static VLAN mapping to a specific forwarding class using a multi-field (MF) classifier • Packet rewrites • <i>Configurable IEEE 802.1p inheritance</i> • Rate-limit option for per-port queues • Configurable shaping overhead for scheduling • Weighted Random Early Detection (WRED) • <i>Intelligent oversubscription on MIC and MPC interfaces</i> • <i>Class of Service on Ethernet pseudowires on Logical Tunnel (LT) interfaces</i> • Fine-grained authentication for RE-generated packets • IEEE 802.1ad S-TAG, exiting/incoming core with label-switched interfaces (LSIs) • Egress IEEE 802.1p multifield (MF) and BA classification for VPLS (MX series only) 	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<p>Class of service (CoS) per port:</p> <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configuration at the queue level • Shaping at the port level and queue level • Scheduling of queues based on weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) • Rate limit option for per-port queues 	<p>12.3R2</p> <p>NOTE: Fine-grained queuing and input queuing are not supported.</p>
<p>Class of service (CoS) per virtual LAN (VLAN):</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	<p>12.3R2</p>

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
Connectivity Fault Management (CFM) protocols and features (IEEE 802.1ag): <ul style="list-style-type: none"> • <i>Ethernet OAM Continuity Check Message (CCM) protocol</i> • <i>Ethernet OAM Linktrace protocol</i> • <i>Ethernet OAM Loopback protocol</i> • <i>Configuring Maintenance Intermediate Points (MIPs)</i> • Stacked VLAN tagging • Trunk ports • VPLS/VPWS • VLAN circuit cross-connect (CCC) encapsulation • Transitional cross-connect (TCC) encapsulation 	12.3R2
<i>Distributed Denial-of-Service (DDoS) Protection</i>	12.3R2
<i>Distributed Periodic Packet Management Process (PPMP)</i>	12.3R2
<i>Distance Vector Multicast Routing Protocol (DVMRP) Tunnels—access side and server side</i>	12.3R2
<i>Ethernet Alarm Indication Signal (ETH-AIS) Function Overview</i>	12.3R2
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • <i>Intelligent Hierarchical Policers</i> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • <i>Layer 2 policers</i> • Set forwarding class loss priority for Routing Engine (RE)-generated packets by using a firewall • Physical interface policers, applying policer to the entire port • <i>Prefix-Specific Counting and Policing Actions</i> 	12.3R2
<i>Flexible Ethernet encapsulation</i>	12.3R2
<i>Graceful routing engine switchover (GRES)</i>	12.3R2
<i>Configuring Generic Routing Encapsulation Tunneling—access side and server side</i>	12.3R2
IGMPv3 support with snooping disabled	12.3R2
<p>Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i>:</p> <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	-
<i>Inline flow monitoring</i>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Intelligent oversubscription on the Trio MPC/MIC interfaces</i>	12.3R2
<i>Integrated Routing and Bridging (IRB)</i>	12.3R2
Unified <i>In-service software upgrade (Unified ISSU)</i>	13.3
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	12.3R2
Interoperability with MPCs and existing DPCs	12.3R2
Interoperability with Juniper Networks 100-Gigabit Ethernet PIC	12.3R2
Interoperability with MX Series Application Services Modular Line Card (AS-MLC)	12.3R2
IPv4	12.3R2
IPv4 multicast	12.3R2
IPv6	12.3R2
<i>IPv6 Multicast Listener Discovery (MLD)</i>	12.3R2
IPv6 multicast	12.3R2
IPv6 Neighbor Discovery Protocol (NDP)	12.3R2
<i>Immediate System-to-Intermediate System (IS-IS)</i>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
ITU-T Y.1731 timestamping support (MX Series routers)	12.3R2
<p>Flow monitoring and services:</p> <ul style="list-style-type: none"> • Active monitoring (multiple v9 j-flow templates) • Active monitoring: cflowed v9 IPv6 templates • Active Monitoring: cflowed V9 per-PFE sampling support • Port mirroring for Layer 2 bridging traffic (family ethernet-switching) <ul style="list-style-type: none"> • Port mirroring for Layer 2 VPLS traffic (family vpls) • Port mirroring for Layer 2 VPN traffic over a circuit cross-connect (CCC) • Virtual private wire service (VPWS) • Flow monitoring on Multiservices DPCs • Packet slice for port mirroring • Inline Jflow monitoring (IPFIX) 	12.3R2
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	12.3R2
<i>Label Distribution Protocol (LDP)</i>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
Layer 2 features:	Release
• Integrated Routing and Bridging (IRB)	• 12.3R2
• Spanning Tree Protocols	• 12.3R2
• Link Layer Discovery Protocol (LLDP)	• 13.3R1 , 12.3R4
• Bridge Protocol Data Unit (BPDU) guard	• 12.3R2
• Bridge Protocol Data Unit (BPDU) loop guard	• 12.3R2
• Layer 2 Tunneling Protocol (L2TP)	• 12.3R2
• Trunk ports	• 13.3R1
• IEEE 802.1ad provider bridges	• 13.3R1
• Multi-chassis Link Aggregation Group (MC-LAG)—active/active and active/standby	• 13.3R1
• MC-LAG—active/active with IGMP snooping	• -
• MC-LAG VLAN -ccc interface encapsulation	• 13.3R1
• Layer 2 Protocol Tunneling (L2PT) support	• 13.3R1
• IGMP snooping with bridging, IRB, and VPLS	• 12.3R2
• <i>Layer 2 Learning and Forwarding in a Logical System Overview</i>	• 12.3R2
• Static Route Support	• 13.2R1
• 64 members in a link aggregation group	• 13.2R1
• Periodic packet management daemon (ppmd) and distributed PPMD for Link Aggregation Control Protocol process (LACPd)	

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
Layer 3 Features:	Release
<ul style="list-style-type: none"> • IPv6 • Protocol Independent Multicast Source-Specific Multicast (PIM SSM) • Bidirectional Forwarding Detection (BFD) • Any-source multicast (ASM) group override of source-specific multicast (SSM) range • Connectionless Network Service (CLNS) • Data Multicast Domain Tunnels (MDT) Subsequent Address Family Identifiers (SAFI) • Draft-Rosen 7 Multicast VPNs • Multicast over Integrated Routing and Bridging (IRB) interfaces • Composite next hop with External and Internal BGP (EIBGP) paths • VPN load balancing and IP header filtering of traffic across External and Internal BGP (EIBGP) paths • Multiprotocol Label Switching (MPLS) over Generic Routing Encapsulation (GRE) • <i>Configuring Logical Tunnel Interfaces</i> 	<ul style="list-style-type: none"> • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 12.3R2 • 13.2R1 • 13.2R1 • 13.2R1
<i>Link aggregation (IEEE 802.3ad)</i>	12.3R2
<i>Link Aggregation Control Protocol (LACP)</i>	12.3R2
<i>Link Layer Discovery Protocol (LLDP)</i>	–
Local loopback	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>MAC learning, policing, accounting, and filtering</i>	12.3R2
Mobile IP	-
Multiservices DPC (MS-DPC): <ul style="list-style-type: none"> • <i>Junos Address Aware Network Addressing Overview</i> • Intrusion Detection Service (IDS) • Graceful Routing Engine Switchover (GRES) for NAT • Intrusion Detection and Prevention (IDP) interoperability • IP Security (IPSec) detection • Two-Way Active Measurement Protocol (TWAMP) interoperability • Real-Time Performance Monitor (RPM) interoperability • GRE interoperability 	13.2R1
Multi-chassis Link Aggregation (MC-LAG)	13.3R1
Multiple Tag Protocol Identifiers (TPIDs)	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>Multiprotocol Label Switching (MPLS):</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multi-segment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connection verification (VCCV) BFD • Point-to-multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet) • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress • Generic Routing Encapsulation (GRE) keepalive messages • MPLS node protection, link protection, and statistics for static LSPs 	12.3R2
<i>mvrp</i>	-
<i>Multitopology routing (MTR)</i>	-
Nonstop Active Routing (NSR)	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Open Shortest Path First (OSPF)</i>	12.3R2
Packet mirroring	12.3R2
Precision Time Protocol (PTP) (IEEE 1588)	15.1R1
IEEE 802.1ah provider backbone bridges (PBB)	-
<i>Periodic Packet Management Process (PPMP) and Distributed PPMP</i>	12.3R2
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	-
Remote Defect Indication (RDI)	12.3R2
<i>Resource Reservation Protocol (RSVP)</i>	12.3R2
<i>Routing Information Protocol (RIP)</i>	12.3R2
<i>SNMP</i>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge Protocol Data Units (BPDUs) guard and loop guard • STP interprotocol action profiles and MAC flush (in VPLS multihoming, flush all MACs when there is a change in the STP interface state due to root protect) 	12.3R2
Synchronous Ethernet (SyncE)	12.3 with SCBE and later
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	13.2
Tunnel services <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	12.3R2
<i>Type, Length, and Value (TLVs)</i> support (IEEE 802.1ag)	-
Unnumbered Ethernet Interface	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	12.3R2
<p><i>Virtual Chassis (MX Series):</i></p> <ul style="list-style-type: none"> • <i>Class of Service (CoS) Support for Virtual Ports</i> • Layer 2 support • DHCP Access Model and authentication, authorization, and accounting (AAA) services • Layer 3 Provider Edge (PE) router support • Dynamic Lawful Intercept (DLI) • <i>Layer 2 Access Node Control Protocol (ANCP)</i> • <i>Wireline Subscriber Management scaling to 64K subscribers</i> • Non-stop active routing (NSR) support for Layer 3 services • Local, Global, and VCCP Graceful Routing Engine Switchover (GRES) • SNMP trap generation when vc-port command fails • Virtual Chassis Port (VCP) masking • <i>Access to the Virtual Chassis Through the Management Interface</i> 	13.2R1 (12.3R4 TRD)

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>Virtual Private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG • Configurable multichassis link aggregation (MC-LAG) interfaces to improve the Layer 2 and Layer 3 convergence time to subsecond values when a multichassis aggregated Ethernet link goes down or comes up in a bridge domain • <i>MAC Pinning to control MAC moves in a bridging environment and in VPLS networks</i> 	12.3R2
<p>Virtual private network (VPN):</p> <ul style="list-style-type: none"> • <i>Multiprotocol Label Switching (MPLS)</i> 	12.3R2
<p><i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i></p> <ul style="list-style-type: none"> • Scale VRRP using instance grouping • <i>Periodic Packet Management Process (PPMP) and Distributed Periodic Packet Management Process (PPMP)</i> 	12.3R2
<p>VPLS packet flooding to the right set of interfaces across mesh groups</p>	12.3R2

Table 43: Protocols and Applications Supported by the MX Series MPC4E (Continued)

Protocol or Application	First Supported Junos OS Release
WAN-PHY mode	12.3R2

RELATED DOCUMENTATION

[32x10GE MPC4E | 181](#)

[2x100GE + 8x10GE MPC4E | 184](#)

[MICs Supported by MX Series Routers | 27](#)

[MPCs Supported by MX Series Routers | 16](#)

Protocols and Applications Supported by the MPC5E for MX Series Routers

Table 44 on page 530 contains the first Junos OS Release support for protocols and applications in the MPC5E installed on the MX240, MX480, MX960, MX2010, and MX2020 routers. The protocols and applications support feature parity with Junos OS Release 12.3.

A dash indicates that the protocol or application is not supported.

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E

Protocol or Application	First Supported Junos OS Release
<i>Access Node Control Protocol (ANCP)</i>	-

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	13.3R3
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	13.3R3
<i>Border Gateway Protocol (BGP)</i>	13.3R3
Bridge protocol data units (BPDUs)	13.3R3
BGP/ <i>MPLS</i> virtual private networks (VPNs)	13.3R3
Class of service (CoS): <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of <i>payload</i> for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for Layer 3 VPN/VPLS LSI and MPLS interfaces • Rate limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling 	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	13.3R3
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	13.3R3
<i>Damping</i>	15.1R2
<i>Distributed Denial-of-Service (DDoS) Protection</i>	13.3R3
<i>DVMRP and GRE support—access side and server side</i>	13.3R3
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	13.3R3
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	13.3R3
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	13.3R3
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
IEEE 802.1ag Maintenance Association Intermediate Point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	13.3R3
<i>Port Status TLV and Interface Status TLV</i>	-
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	13.3R3
<p data-bbox="232 905 548 936"><i>Firewall filters and policers:</i></p> <ul data-bbox="232 968 1057 1440" style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32,000 to 8000 • Egress .1p MF and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 	13.3R3
<i>Flexible Ethernet encapsulation</i>	13.3R3
<p data-bbox="232 1612 505 1644"><i>Flexible Queuing Mode</i></p> <p data-bbox="232 1675 1062 1707">NOTE: Flexible queuing mode is supported only on non-HQoS variants.</p>	14.1R1
<i>Graceful Routing Engine Switchover (GRES)</i>	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
IGMPv3 support with snooping disabled	13.3R3
Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i> : <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	13.3R3
Hierarchical CoS on generic routing encapsulation (GRE) tunnels	15.1R2
<i>Inline active flow monitoring</i>	13.3R3
<i>Intelligent Oversubscription</i>	13.3R3
<i>Integrated routing and bridging (IRB)</i>	13.3R3
Unified <i>In-service software upgrade (Unified ISSU)</i>	16.1R1
Interoperability with MPCs and existing DPCs	-
Interoperability with Multiservices DPCs	13.3R3
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	13.3R3
Interoperability with Juniper Networks 100-Gigabit Ethernet PIC	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
Interoperability with MX Series Application Services Modular Line Card (AS-MLC)	13.3R3
IPv4	13.3R3
IPv4 multicast	13.3R3
IPv6	13.3R3
IPv6 MLD	13.3R3
IPv6 multicast	13.3R3
IPv6 Neighbor Discovery	13.3R3
<i>IS-IS</i>	13.3R3
ITU-T Y.1731 timestamping support on MX Series routers	13.3R3
Flow monitoring and services:	Release
<ul style="list-style-type: none"> • Active monitoring (multiple version 8 j-flow templates) • Active monitoring (cflowed version 9 templates) • Port mirroring family VPLS, bridge CCC encapsulation (VPWS) • Packet slice for port mirroring • Flow monitoring on Multiservices DPCs • Inline active flow monitoring on MPC5E 	<ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • - • 13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	13.3R3
<i>LDP</i>	13.3R3
<p><i>Layer 2 features:</i></p> <ul style="list-style-type: none"> • Trunk ports • Layer 2 support for MX Series Virtual Chassis • Layer 2 and Layer 2.5, IRB, and Spanning Tree Protocols (xSTP) • IEEE 802.1ad provider bridges • Layer 2 protocol tunneling (L2PT) support • Layer 2 Tunneling Protocol (L2TP) • Multichassis LAG—active/active and active/standby • Multichassis LAG—active/active with IGMP snooping • Link aggregation group (LAG)—VLAN-CCC encapsulation • IGMP snooping with bridging, IRB, and VPLS 	<p>Release</p> <ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • - • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3
Layer 2 VPN interfaces support VLAN ID list	13.3R3
<i>Link aggregation (IEEE 802.3ad)</i>	13.3R3
<i>Link Aggregation Control Protocol (LACP)</i>	13.3R3
<i>Link Layer Discovery Protocol (LLDP)</i>	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
Local loopback	13.3R3
<i>MAC learning, policing, accounting, and filtering</i>	13.3R3
Mobile IP	-
Multichassis link aggregation	-
Multiple Tag Protocol Identifiers (TPIDs)	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • <i>Point to multipoint</i> using the enhanced-ip command (support for NG-MVPN and <i>point-to-multipoint</i> load balancing over aggregated Ethernet) • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	13.3R3
MPLS node protection, link protection, and statistics for static LSPs	13.3R3
<i>mvrp</i>	-
<i>Multitopology routing</i>	-
Nonstop active routing (NSR)	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>OSPF</i>	13.3R3
Packet mirroring	13.3R3
Precision Time Protocol (PTP) (IEEE 1588)	14.2R2
IEEE 802.1ah provider backbone bridging (PBB)	-
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	13.3R3
<i>RSVP</i>	13.3R3
<i>RIP</i>	13.3R3
<i>SNMP</i>	13.3R3
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush 	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>Subscriber management and services</i>(MX2010, MX2020: 12.3R4, 13.3R2, 13.3)</p> <ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs • Aggregated Ethernet over dynamic VLANs • <i>ANCP and the ANCP Agent Overview</i> • DHCP access model • Dynamic adjustment of shapers • Dynamic PPPoE subscriber interface creation based on PPPoE service name tables • Dynamic profiles • Dynamic shaping, scheduling, and queuing • Dynamic VLANs • Enhanced subscriber management • Static and dynamic PPPoE subscriber interfaces 	<p>Release</p> <ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 15.1R4 • 13.3R3
Synchronous Ethernet	13.3R3
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	13.3R3
<p>Tunnel services</p> <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	13.3R3
Unnumbered Ethernet Interface	13.3R3

Table 44: Protocols and Applications Supported by the MX240, MX480, MX960, MX2010, and MX2020 MPC5E (Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	13.3R3
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services	13.3R3
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast traffic hashing over LAG 	13.3R3
Virtual private network (VPN)	13.3R3
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	13.3R3
VPLS packet flooding to the right set of interfaces across mesh groups	13.3R3
WAN-PHY mode	13.3R3

RELATED DOCUMENTATION

[6x40GE + 24x10GE MPC5E | 187](#)

[6x40GE + 24x10GE MPC5EQ | 192](#)

[MICs Supported by MX Series Routers | 27](#)

Protocols and Applications Supported by the MPC6E for MX2000 Routers

Table 45 on page 543 contains the first Junos OS Release support for protocols and applications on the MX2010 and MX2020 MPC6E. The protocols and applications support feature parity with Junos OS Release 13.3.

A dash indicates that the protocol or application is not supported.

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E

Protocol or Application	First Supported Junos OS Release
<i>Access Node Control Protocol (ANCP)</i>	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	13.3R3
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	13.3R3
<i>Border Gateway Protocol (BGP)</i>	13.3R3
Bridge protocol data units (BPDUs)	13.3R3
BGP/ MPLS virtual private networks (VPNs)	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS): <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of <i>payload</i> for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • Rate limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling 	13.3R3
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	13.3R2

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	13.3R3
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	13.3R3
<i>Damping</i>	15.1R2
<i>Distributed Denial-of-Service (DDoS) Protection</i>	13.3R3
<i>DVMRP</i> and GRE support—access side and server side	13.3R3
<i>Ethernet Ring Protection Switching</i> with multiple G.8032 instances	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	13.3R3
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	13.3R3
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	13.3R3
IEEE 802.1ag Maintenance Association Intermediate Point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	13.3R3
IEEE 802.1ag optional type, length, and value (TLV) (<i>Port Status TLV and Interface Status TLV</i>)	-
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	13.3R3
<p data-bbox="233 1209 548 1241"><i>Firewall filters and policers:</i></p> <ul data-bbox="233 1272 1057 1738" style="list-style-type: none"> <li data-bbox="233 1272 732 1304">• Policer support for aggregated Ethernet <li data-bbox="233 1339 1057 1371">• Aggregate firewall-based policer for all families of a logical interface <li data-bbox="233 1407 1045 1476">• Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall <li data-bbox="233 1512 987 1543">• Physical interface policers, applying policers to the entire port <li data-bbox="233 1579 737 1610">• Lower policer limit from 32,000 to 8000 <li data-bbox="233 1646 792 1677">• Egress .1p MF and BA classification for VPLS <li data-bbox="233 1713 1057 1745">• Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Flexible Ethernet encapsulation</i>	13.3R3
<i>Graceful Routing Engine Switchover (GRES)</i>	13.3R3
IGMPv3 support with snooping disabled	13.3R3
Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i> : <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	13.3R3
<i>Inline active flow monitoring</i>	13.3R3
<i>Intelligent oversubscription on MIC and MPC interfaces</i>	13.3R3
<i>Integrated routing and bridging (IRB)</i>	13.3R3
Unified <i>In-service software upgrade (Unified ISSU)</i>	16.1R1
Interoperability with MPCs and existing DPCs	13.3R3
Interoperability with Multiservices DPCs	13.3R3
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	13.3R3
IPv4	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
IPv4 multicast	13.3R3
IPv6	13.3R3
IPv6 MLD	13.3R3
IPv6 multicast	13.3R3
IPv6 neighbor discovery	13.3R3
<i>IS-IS</i>	13.3R3
ITU-T Y.1731 timestamping support on MX Series routers	13.3R3
Flow monitoring and services: <ul style="list-style-type: none"> • Active monitoring (multiple v8 version j-flow templates) • Active monitoring (cflowed version 9 templates) • Port mirroring family VPLS, bridge CCC encapsulation (VPWS) • Packet slice for port mirroring • Flow monitoring on Multiservices DPCs • Inline active flow monitoring on MPC5E 	Release <ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • - • 13.3R3
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	13.3R3
<i>LDP</i>	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Layer 2 features:</i>	Release
<ul style="list-style-type: none"> • Trunk ports • Layer 2 support for MX Series Virtual Chassis • Layer 2 and Layer 2.5, IRB and Spanning Tree Protocols (xSTP) • IEEE 802.1ad provider bridges • Layer 2 protocol tunneling (L2PT) support • Layer 2 Tunneling Protocol (L2TP) • Multichassis LAG—active/active and active/standby • Multichassis LAG—active/active with IGMP snooping • Link aggregation group (LAG)—VLAN-CCC encapsulation • IGMP snooping with bridging, IRB, and VPLS 	<ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • 15.1R2 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 15.1R2 • 13.3R2
Layer 2 VPN interfaces	
<i>Link aggregation (IEEE 802.3ad)</i>	13.3R3
<i>Link Aggregation Control Protocol (LACP)</i>	13.3R3
<i>Link Layer Discovery Protocol (LLDP)</i>	-
Local loopback	13.3R3
<i>MAC learning, policing, accounting, and filtering</i>	13.3R3
Mobile IP	-

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
Multichassis link aggregation	-
Multiple Tag Protocol Identifiers (TPIDs)	13.3R3
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • Point to multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet) • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	13.3R3
MPLS node protection, link protection, and statistics for static LSPs	13.3R3
<i>mvrp</i>	-

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Multitopology routing</i>	-
Nonstop active routing (NSR)	-
<i>OSPF</i>	13.3R3
Packet mirroring	13.3R3
Precision Time Protocol (PTP) (IEEE 1588)	-
IEEE 802.1ah provider backbone bridging (PBB)	-
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	13.3R3
<i>RSVP</i>	13.3R3
<i>RIP</i>	13.3R3
<i>SNMP</i>	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush 	13.3R3
<i>Subscriber management and services</i> (MX2010, MX2020: 12.3R4, 13.3R2, 13.3): <ul style="list-style-type: none"> • Aggregated Ethernet over static VLANs • Aggregated Ethernet over dynamic VLANs • <i>ANCP and the ANCP Agent Overview</i> • DHCP access model • Dynamic adjustment of shapers • Dynamic PPPoE subscriber interface creation based on PPPoE service name tables • Dynamic profiles • Dynamic shaping, scheduling, and queuing • Dynamic VLANs • Enhanced subscriber management (uplink services) • Static and dynamic PPPoE subscriber interfaces 	Release <ul style="list-style-type: none"> • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 13.3R3 • 15.1R4 • 13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
Synchronous Ethernet	13.3R3
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	13.3R3
Tunnel services	13.3R3
Unnumbered Ethernet Interface	13.3R3
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	13.3R3
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unknown unicast, and multicast traffic hashing over LAG 	13.3R3
Virtual private network (VPN)	13.3R3

Table 45: Protocols and Applications Supported by the MX2010 and MX2020 MPC6E (Continued)

Protocol or Application	First Supported Junos OS Release
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	13.3R3
VPLS packet flooding to the right set of interfaces across mesh groups	13.3R3
WAN-PHY mode	13.3R3

RELATED DOCUMENTATION

[MPC6E | 201](#)

[MICs Supported by MX Series Routers | 27](#)

Protocols and Applications Supported by the MPC7E for MX Series Routers

Table 46 on page 554 contains the first Junos OS Release support for protocols and applications on the MX240, MX480, MX960, MX2010, and MX2020 MPC7Es ("[MPC7E-10G](#)" on page 207 and "[MPC7E-MRATE](#)" on page 204). The protocols and applications support feature parity with Junos OS Release 15.1R1.

A dash indicates that the protocol or application is not supported.

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<i>Access Node Control Protocol (ANCP)</i>	-	-

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	15.1F4	15.1F5
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	15.1F4	15.1F5
<i>Border Gateway Protocol (BGP)</i>	15.1F4	15.1F5
Bridge protocol data units (BPDUs)	15.1F4	15.1F5
BGP/MPLS virtual private networks (VPNs)	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<p>Class of service (CoS):</p> <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of payload for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • Rate limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling 	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<p>Class of service (CoS) per port:</p> <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	<p>15.1F4</p> <p>NOTE: MPC7E-MRATE MPC supports 5 guaranteed and 4 excess priorities.</p>	<p>15.1F5</p> <p>NOTE: MPC7E-10G MPC supports 5 guaranteed and 4 excess priorities.</p>
<p>Class of service (CoS) per virtual LAN (VLAN):</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	<p>15.1F4</p>	<p>15.1F5</p>

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	17.2R1	17.2R1
<i>Distributed Denial-of-Service (DDoS) Protection</i>	15.1F4	15.1F5
<i>DVMRP and GRE support—access side and server side</i>	15.1F4	15.1F5
<i>Dynamic Power Management</i>	15.1F4	15.1F5
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	15.1F4	15.1F5
<i>Flexible Queuing Mode</i>	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	15.1F4	15.1F5
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	15.1F4	15.1F5
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	15.1F4	15.1F5
IEEE 802.1ag maintenance association intermediate point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	15.1F4	15.1F5
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Port Status TLV and Interface Status TLV</i>	15.1F4	15.1F5
IEEE 802.3ah distributed periodic packet management (PPM) process , alarm indication signal (AIS), and remote defect indication (RDI)	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Intelligent hierarchical policers • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32K to 8K • Egress .1p MF and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 	<p>15.1F4</p> <p>NOTE: Layer 2 overhead adjustment (packet length used for the policer included in the Layer 2 header) is not supported in 15.1F4.</p>	<p>15.1F5</p> <p>NOTE: Layer 2 overhead adjustment (packet length used for the policer included in the Layer 2 header) is not supported in 15.1F5.</p>
<i>Flexible Ethernet encapsulation</i>	15.1F4	15.1F5
<i>Graceful Routing Engine Switchover (GRES)</i>	15.1F4	15.1F5
IGMPv3 support with snooping disabled	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i> : <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	15.1F4	15.1F5
<i>Inline flow monitoring</i>	15.1F4	15.1F5
<i>Intelligent Oversubscription on MIC and MPC Interfaces Overview</i>	15.1F4	15.1F5
<i>Integrated routing and bridging (IRB)</i>	15.1F4	15.1F5
Unified <i>In-service software upgrade (Unified ISSU)</i>	17.4R1	17.4R1
Interoperability with MPCs	15.1F4	15.1F5
Interoperability with MS-DPCs	-	-
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	-	-
IPv4	15.1F4	15.1F5
IPv4 multicast	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
IPv6	15.1F4	15.1F5
IPv6 MLD	15.1F4	15.1F5
IPv6 multicast	15.1F4	15.1F5
IPv6 Neighbor Discovery	15.1F4	15.1F5
<i>IS-IS</i>	15.1F4	15.1F5
ITU-T Y.1731 timestamping support on MX Series routers	15.1F4	15.1F5
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	15.1F4	15.1F5
<i>Minimum LDP Configuration</i>	15.1F4	15.1F5
Layer 2 VPN interfaces support VLAN ID list	15.1F4	15.1F5
<i>Link aggregation (IEEE 802.3ad)</i>	15.1F4	15.1F5
<i>Link Aggregation Control Protocol (LACP)</i>	15.1F4	15.1F5
<i>Link Layer Discovery Protocol (LLDP)</i>	15.1F4	15.1F5
Local loopback	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<i>MAC learning, policing, accounting, and filtering</i>	15.1F4	15.1F5
Mobile IP	-	-
Multichassis link aggregation	15.1F4	15.1F5
Multiple Tag Protocol Identifiers (TPIDs)	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • Point to multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet) • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	15.1F4	15.1F5
MPLS node protection, link protection, and statistics for static LSPs	15.1F4	15.1F5
<i>mvrp</i>	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<i>Multitopology routing</i>	15.1F4	15.1F5
Nonstop active routing (NSR)	15.1F4	15.1F5
<i>OSPF</i>	15.1F4	15.1F5
Packet mirroring	15.1F4	15.1F5
Precision Time Protocol (PTP) (IEEE 1588)	17.4R1	17.4R1
IEEE 802.1ah provider backbone bridging (PBB)	-	-
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	15.1F4	15.1F5
<i>RSVP Overview</i>	15.1F4	15.1F5
<i>RIP</i>	15.1F4	15.1F5
<i>SNMP</i>	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	15.1F4	15.1F5
<i>Subscriber management and services:</i> <ul style="list-style-type: none"> • Enhanced subscriber management 	16.1R4; 17.1R1	16.1R4; 17.1R1
Synchronous Ethernet	16.1R1	16.1R1
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	16.1R4 NOTE: TWAMP is not supported on the MX2020 and MX2010 chassis.	16.1R4 NOTE: TWAMP is not supported on the MX2020 and MX2010 chassis.
Tunnel services <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Unified in-service software upgrade (ISSU)	-	-
Unnumbered Ethernet Interface	15.1F4	15.1F5
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	15.1F4	15.1F5
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services	17.3R1	17.3R1
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	15.1F4	15.1F5
Virtual private network (VPN)	15.1F4	15.1F5

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	15.1F4	15.1F5
VPLS packet flooding to the right set of interfaces across mesh groups	15.1F4	15.1F5
WAN-PHY mode	-	-
Flow Monitoring		
Inline IP Flow Information Export (IPFIX)	15.1F4	15.1F5
Active monitoring	15.1F4	15.1F5
Port mirroring family VPLS, bridge CCC encapsulation (VPWS)	15.1F4	15.1F5
Packet slice for port mirroring	15.1F4	15.1F5
Flow monitoring on MS-MPCs	17.3R1	17.3R1
Inline flow monitoring	15.1F4	15.1F5
Layer 2 Features		
Trunk ports	15.1F4	15.1F5
Layer 2 support for MX Series Virtual Chassis	17.3R1	17.3R1

Table 46: Protocols and Applications Supported by MPC7Es in the MX240, MX480, MX960, MX2010, and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC7E-MRATE	First Supported Junos OS Release for MPC7E-10G
Layer 2 and Layer 2.5, IRB and Spanning Tree Protocols (xSTP)	15.1F4	15.1F5
IEEE 802.1ad provider bridges	15.1F4	15.1F5
Layer 2 protocol tunneling (L2PT) support	15.1F4	15.1F5
Layer 2 Tunneling Protocol (L2TP)	15.1F4	15.1F5
Multichassis LAG—active/active and active/standby	15.1F4	15.1F5
Multichassis LAG—active/active with IGMP snooping	15.1F4	15.1F5
Link aggregation group (LAG)—VLAN-CCC encapsulation	15.1F4	15.1F5
IGMP snooping with bridging, IRB, and VPLS	15.1F4	15.1F5
MACSec		
GCM-AES-128 MACSec Encryption, 802.1AE-2006	-	16.1R1
GCM-AES-256 MACSec Encryption, 802.1AEbn-2011	-	16.2R1

RELATED DOCUMENTATION

[MPC7E-MRATE | 204](#)

[MPC7E-10G | 207](#)

Protocols and Applications Supported by the MPC8E and MPC9E on the MX2010 and MX2020 Routers

Table 47 on page 570 lists the protocols and applications supported by MPC8E and MPC9E on the MX2010 and MX2020 routers.

An en dash indicates that the protocol or application is not supported.

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<i>Access Node Control Protocol (ANCP)</i>	-	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	15.1F5	15.1F5
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	15.1F5	15.1F5
<i>Border Gateway Protocol (BGP)</i>	15.1F5	15.1F5
Bridge protocol data units (BPDUs)	15.1F5	15.1F5
BGP/MPLS virtual private networks (VPNs)	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
Class of service (CoS): <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of payload for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • Rate-limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling 	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	15.1F5	15.1F5
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	-	-
<i>Physical Interface Damping Overview</i>	16.1R1	16.1R1
<i>Distributed Denial-of-Service (DDoS) Protection</i>	15.1F5	15.1F5
<i>DVMRP and GRE support—access side and server side</i>	15.1F5	15.1F5
<i>Dynamic Power Management</i>	15.1F5	15.1F5
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<i>Flexible Queuing Mode</i>	15.1F5	15.1F5
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	15.1F5	15.1F5
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	15.1F5	15.1F5
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	15.1F5	15.1F5
IEEE 802.1ag maintenance association intermediate point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	15.1F5	15.1F5
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Port Status TLV and Interface Status TLV</i>	15.1F5	15.1F5
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Intelligent hierarchical policers • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32,000 to 8000 • Egress .1p MF and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 	15.1F5	15.1F5
<i>Flexible Ethernet encapsulation</i>	15.1F5	15.1F5
<i>Graceful Routing Engine Switchover (GRES)</i>	15.1F5	15.1F5
IGMPv3 support with snooping disabled	15.1F5	15.1F5
<p>Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler:</i></p> <ul style="list-style-type: none"> • Set of Interfaces • VLAN level • Port level 	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<i>Inline flow monitoring</i>	15.1F5	15.1F5
<i>Intelligent Oversubscription</i>	15.1F5	15.1F5
<i>Integrated routing and bridging (IRB)</i>	15.1F5	15.1F5
<i>Unified In-service software upgrade (Unified ISSU)</i>	17.4R1	17.4R1
Interoperability with existing MPCs	15.1F5	15.1F5
IPv4	15.1F5	15.1F5
IPv4 multicast	15.1F5	15.1F5
IPv6	15.1F5	15.1F5
IPv6 MLD	15.1F5	15.1F5
IPv6 multicast	15.1F5	15.1F5
IPv6 Neighbor Discovery	15.1F5	15.1F5
<i>IS-IS</i>	15.1F5	15.1F5
ITU-T Y.1731 timestamping support on MX Series routers	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
Layer 2 VPN interfaces support VLAN ID list	15.1F5	15.1F5
<i>Link aggregation (IEEE 802.3ad)</i>	15.1F5	15.1F5
<i>Link Aggregation Control Protocol (LACP)</i>	15.1F5	15.1F5
<i>Link Layer Discovery Protocol (LLDP)</i>	15.1F5	15.1F5
Local loopback	15.1F5	15.1F5
<i>MAC learning, policing, accounting, and filtering</i>	15.1F5	15.1F5
Mobile IP	-	-
Multichassis Link Aggregation	15.1F5	15.1F5
Multiple Tag Protocol Identifiers (TPIDs)	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	15.1F5	15.1F5
MPLS node protection, link protection, and statistics for static LSPs	15.1F5	15.1F5
<i>mvrp</i>	-	-
<i>Multitopology routing</i>	15.1F5	15.1F5
Nonstop active routing (NSR)	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<i>OSPF</i>	15.1F5	15.1F5
Packet mirroring	15.1F5	15.1F5
Precision Time Protocol (PTP) (IEEE 1588)	17.4R1	17.4R1
IEEE 802.1ah provider backbone bridging (PBB)	-	-
<i>RSVP Overview</i>	15.1F5	15.1F5
<i>RIP</i>	15.1F5	15.1F5
<i>SNMP</i>	15.1F5	15.1F5
Spanning tree protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	15.1F5	15.1F5

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<p><i>Subscriber management and services:</i></p> <ul style="list-style-type: none"> Enhanced subscriber management 	16.1R4; 17.1R1	16.1R4; 17.1R1
Synchronous Ethernet	16.1R1	16.1R1
<p><i>Two-Way Active Measurement Protocol (TWAMP)</i> Real-time Performance Monitoring (RPM)/TWAMP hardware timestamping</p>	17.3R1	17.3R1
<p>Tunnel services</p> <ul style="list-style-type: none"> Clear DF-Bit (Don't Fragment Bit) 	15.1F5	15.1F5
Unnumbered Ethernet Interface	15.1F5	15.1F5
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> VLAN stacking and rewriting Channels defined by two stacked VLAN tags Flexible VLAN tagging IP service for nonstandard TPID and stacked VLAN tags 	15.1F5	15.1F5
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services	17.3R1	17.3R1

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	15.1F5	15.1F5
Virtual private network (VPN)	15.1F5	15.1F5
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	15.1F5	15.1F5
VPLS packet flooding to the right set of interfaces across mesh groups	15.1F5	-

Table 47: Protocols and Applications Supported by MPC8E and MPC9E on the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release	
	MPC8E	MPC9E
<p>MACSec Capabilities: Starting in Junos OS Release 17.4R1, the JNP-MIC-100G MIC extends Media Access Control Security (MACsec) capabilities on MPC8E and MPC9E MPCs installed in MX2010, MX2020, and MX2008 routers.</p> <p>Only MPC8E/9E with JNP-MIC-100G MIC supports MACsec feature.</p> <ul style="list-style-type: none"> • GCM-AES-128 MACSec Encryption, 802.1AE-2006 • GCM-AES-256 MACSec Encryption, 802.1AEbn-2011 • GCM-AES-XPB-128 Cipher Suite, 802.1AEbw-2013 • GCM-AES-XPB-256 Cipher Suite, 802.1AEbw-2013 	17.4R1	17.4R1

Release History Table

Release	Description
17.4R1	Starting in Junos OS Release 17.4R1, the JNP-MIC-100G MIC extends Media Access Control Security (MACsec) capabilities on MPC8E and MPC9E MPCs installed in MX2010, MX2020, and MX2008 routers.

RELATED DOCUMENTATION

Upgrading MPC8E to Provide Increased Bandwidth

[MPC8E | 210](#)

[MPC9E | 213](#)

Protocols and Applications Supported by the MS-MIC and MS-MPC

Table 48 on page 584 contains the first Junos OS Release support for protocols and applications on the MX104, MX240, MX480, MX960, MX2010, and MX2020 Multiservices MIC (MS-MIC) and Multiservices MPC (MS-MPC). A dash indicates that the protocol or application is not supported.

Table 48: Protocols and Applications Supported by the MS-MIC and MS-MPC

Software Feature	First Supported Junos OS Release
GRE Key	-
GRE dont-fragment	-
HTTP redirect services	15.1R4
Stateful firewall	13.2R4
Network Address Translation (NAT) for IP addresses	13.2R4
Port Address Translation (PAT) for port numbers	13.2R4
IP Security (IPSec) encryption	13.2R4
Flow aggregation	-
Active flow monitoring exports cflowd version 5 and version 8 records	-
Active flow monitoring exports flow monitoring version 9 records, based on RFC 3954	13.2R4

Table 48: Protocols and Applications Supported by the MS-MIC and MS-MPC (Continued)

Software Feature	First Supported Junos OS Release
<i>Graceful Routing Engine Switchover (GRES)</i>	13.3 NOTE: GRES is not supported for MS-MIC on MX104 router.
Passive flow monitoring	-
Passive flow collection	-
Flow-tap	-
Dynamic flow capture	-
Real-time performance monitoring	13.3
Link Services	-
MX Series Virtual Chassis with stateful firewall	14.2
MX Series Virtual Chassis with IPv4-to-IPv4 basic NAT, dynamic NAT, static destination NAT, dynamic NAT with port mapping, and stateful NAT64	16.1R4 and 18.3R1. Starting in Junos OS Release 18.4R1, these features are supported on the MX Series Virtual Chassis for the Juniper broadband network gateway (BNG).
MX Series Virtual Chassis with DS-Lite	18.4R1
Traffic sampling	13.2R4

Table 48: Protocols and Applications Supported by the MS-MIC and MS-MPC (Continued)

Software Feature	First Supported Junos OS Release
Tunnel services: <ul style="list-style-type: none"> • IP-IP unicast tunneling • GRE unicast tunneling—Supports GRE fragmentation • Protocol Independent Multicast (PIM) sparse mode unicast tunneling 	-
Virtual tunnel interface for Layer 3 VPNs	-
Layer 2 Tunneling Protocol (L2TP)	-
Voice services: <ul style="list-style-type: none"> • Compressed Real-Time Transport Protocol (CRTP) 	-
Encapsulations: <ul style="list-style-type: none"> • Multilink Frame Relay (MLFR) • Multilink Point-to-Point Protocol (MLPP) 	-

RELATED DOCUMENTATION
[MX Series MPC Overview | 15](#)
[MPCs Supported by MX Series Routers | 16](#)
[Multiservices MIC | 338](#)
[Multiservices MPC | 144](#)

Protocols and Applications Supported by the MX10003 MPC (Multi-Rate) on the MX10003 Router

Table 49 on page 587 lists the protocols and applications supported by MX10003 MPC (Multi-Rate) on the MX10003 router.

An en dash indicates that the protocol or application is not supported.

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router

Protocol or Application	First Supported Junos OS Release
<i>Access Node Control Protocol (ANCP)</i>	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	17.3R1
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	17.3R1
<i>Border Gateway Protocol (BGP)</i>	17.3R1
Bridge protocol data units (BPDUs)	17.3R1
BGP/ <i>MPLS</i> virtual private networks (VPNs)	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS): <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of payload for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • Rate-limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling 	17.3R1
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking 	17.3R1
Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces: <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	17.3R1
<i>Physical Interface Damping Overview</i>	17.3R1
<i>Distributed Denial-of-Service (DDoS) Protection</i>	17.3R1
<i>DVMRP and GRE support—access side and server side</i>	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<i>Dynamic Power Management</i>	17.3R1
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	17.3R1
<i>Flexible Queuing Mode</i>	17.3R1
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	17.3R1
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	17.3R1
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	17.3R1
IEEE 802.1ag maintenance association intermediate point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	17.3R1
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Port Status TLV</i> and <i>Interface Status TLV</i>	17.3R1
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Intelligent hierarchical policers • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32,000 to 8000 • Egress .1p MF and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 	17.3R1
<i>Flexible Ethernet encapsulation</i>	17.3R1
<i>Graceful Routing Engine Switchover (GRES)</i>	17.3R1
IGMPv3 support with snooping disabled	17.3R1
<p>Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i>:</p> <ul style="list-style-type: none"> • Set of Interfaces • VLAN level • Port level 	17.3R1
<i>Inline flow monitoring</i>	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<i>Intelligent Oversubscription</i>	17.3R1
<i>Integrated routing and bridging (IRB)</i>	17.3R1
Interoperability with existing MPCs	17.3R1
IPv4	17.3R1
IPv4 multicast	17.3R1
IPv6	17.3R1
IPv6 MLD	17.3R1
IPv6 multicast	17.3R1
IPv6 Neighbor Discovery	17.3R1
<i>IS-IS</i>	17.3R1
ITU-T Y.1731 timestamping support on MX Series routers	-

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
Flow monitoring and services: <ul style="list-style-type: none"> • Active monitoring (cflowed version 9 templates) • Port mirroring family VPLS, bridge CCC encapsulation (VPWS) • Packet slice for port mirroring • Flow monitoring on MS-DPCs • Inline flow monitoring 	Release <ul style="list-style-type: none"> • 17.3R1 • 17.3R1 • 17.3R1 • - • 17.3R1
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	17.3R1
<i>Minimum LDP Configuration</i>	17.3R1
Layer 2 features: <ul style="list-style-type: none"> • Trunk ports • Layer 2 support for MX Series Virtual Chassis • Layer 2 and Layer 2.5, IRB and spanning tree protocols (xSTP) • IEEE 802.1ad provider bridges • Layer 2 protocol tunneling (L2PT) support • Layer 2 Tunneling Protocol (L2TP) • Multichassis LAG—active/active and active/standby • Multichassis LAG—active/active with IGMP snooping • IGMP snooping with bridging, IRB, and VPLS 	Release <ul style="list-style-type: none"> • 17.3R1 • - • 17.3R1 • 17.3R1 • 17.3R1 • 17.3R1 • 17.3R1 • 17.3R1 • 17.3R1
Layer 2 VPN interfaces support VLAN ID list	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<i>Link aggregation (IEEE 802.3ad)</i>	17.3R1
<i>Link Aggregation Control Protocol (LACP)</i>	17.3R1
<i>Link Layer Discovery Protocol (LLDP)</i>	17.3R1
Local loopback	17.3R1
<i>MAC learning, policing, accounting, and filtering</i>	17.3R1
MACSec with GCM-AES-256 Encryption and GCM-AES-XPB-256 Encryption NOTE: MACSec is supported on JNP-MIC1-MACSEC only.	17.3R2
Mobile IP	-
Multichassis Link Aggregation	17.3R1
Multiple Tag Protocol Identifiers (TPIDs)	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	17.3R1
MPLS node protection, link protection, and statistics for static LSPs	17.3R1
<i>mvrp</i>	-
<i>Multitopology routing</i>	17.3R1
Nonstop active routing (NSR)	17.3R1
<i>OSPF</i>	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
Packet mirroring	17.3R1
Precision Time Protocol (PTP) (IEEE 1588)	17.3R1
IEEE 802.1ah provider backbone bridging (PBB)	-
<i>RSVP Overview</i>	17.3R1
<i>RIP</i>	17.3R1
<i>SNMP</i>	17.3R1
Spanning tree protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	17.3R1
<i>Subscriber management and services:</i> <ul style="list-style-type: none"> • Enhanced subscriber management 	17.3R1

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
Synchronous Ethernet	17.3R1
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	-
Tunnel services <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	17.3R1
Unnumbered Ethernet Interface	17.3R1
<i>VLANs IEEE 802.1Q:</i> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	17.3R1
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services	--

Table 49: Protocols and Applications Supported by MX10003MPC on the MX10003 Router
(Continued)

Protocol or Application	First Supported Junos OS Release
<i>Virtual private LAN service (VPLS):</i> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	17.3R1
Virtual private network (VPN)	17.3R1
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	17.3R1
VPLS packet flooding to the right set of interfaces across mesh groups	-

Protocols and Applications Supported by the JNP10K-LC2101 on the MX10008 and MX10016 Routers

Table 50 on page 599 lists the protocols and applications supported by JNP10K-LC2101 on the MX10008 and MX10016 routers.

An en dash indicates that the protocol or application is not supported.

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers

Protocol or Application	JNP10K-LC2101
<i>Access Node Control Protocol (ANCP)</i>	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels or Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Manual 	18.2R1
<i>Bidirectional Forwarding Detection protocol (BFD)</i>	18.2R1
<i>Border Gateway Protocol (BGP)</i>	18.2R1
Bridge protocol data units (BPDUs)	18.2R1
BGP/MPLS virtual private networks (VPNs)	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Chassis: <ul style="list-style-type: none"> • Fabric Management • Redundancy Mode • Fabric Grant Bypass Mode • Hypermode • License Mode (IR, R, Base) • Port Identification • Rate Selectability • Lane LED • Smooth Upgrade 	Release <ul style="list-style-type: none"> • 18.2R1 • 18.2R1 • - • 18.2R1 • - • 18.2R1 • 18.2R1 • 18.2R1 • NA

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<p>Class of service (CoS):</p> <ul style="list-style-type: none"> • Maintain CoS across internal tunnel interfaces • Packet rewrites • Behavior aggregate (BA) classification • BA classification based on 802.1p of payload for core-facing VPLS interfaces • BA DSCP classification of MPLS packets for L3VPN/VPLS LSI and MPLS interfaces • Rate-limit option for per-port queues • BA DSCP classification for VPLS/CCC family • Configurable .1p inheritance: push and swap from the hidden tag • Configurable shaping overhead for scheduling • Dedicated CoS Queues • Per Unit Queuing • Hierarchical Queuing • Per Priority Shaping and support for enhanced-priority-mode • Logical Interface Scheduling (DLCLs and VLANs) 	<p>18.2R1</p>

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	18.2R1
Class of service (CoS) per virtual LAN (VLAN): <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Tricolor marking • Cos Scaling on Non Queuing MPCs (per VLAN queuing) 	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<p>Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Tricolor marking • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	-
<i>Physical Interface Damping Overview</i>	18.2R1
<i>Distributed Denial-of-Service (DDoS) Protection</i>	18.2R1
<i>DVMRP and GRE support—access side and server side</i>	18.2R1
<i>Dynamic Power Management</i>	18.2R1
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<i>Flexible Queuing Mode</i>	18.2R1
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	18.2R1
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	18.2R1
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	18.2R1
IEEE 802.1ag maintenance association intermediate point (MIP) support, continuity check message (CCM), stacked VLAN tagging, trunk ports, support for VPLS/VPWS, VLAN circuit cross-connect (CCC) encapsulation and translational cross-connect (TCC) encapsulation	18.2R1
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Port Status TLV and Interface Status TLV</i>	18.2R1
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<p><i>Firewall filters and policers:</i></p> <ul style="list-style-type: none"> • Policer support for aggregated Ethernet • Aggregate firewall-based policer for all families of a logical interface • Intelligent hierarchical policers • Set forwarding class and loss priority for Routing Engine-generated packets by using a firewall • Physical interface policers, applying policers to the entire port • Lower policer limit from 32,000 to 8000 • Egress .1p MF and BA classification for VPLS • Differentiated Services Code Point (DSCP) rewrite for IPv4 and IPv6 • Filter-based GRE Tunneling across IPv4 Networks • Filter-based L2TP Tunneling across IPv4 Networks 	18.2R1
<i>Flexible Ethernet encapsulation</i>	18.2R1
<i>Graceful Routing Engine Switchover (GRES)</i>	18.2R1
IGMPv3 support with snooping disabled	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i> . <ul style="list-style-type: none"> • Set of Interfaces • VLAN level • Port level 	18.2R1
<i>Inline flow monitoring</i> <ul style="list-style-type: none"> • 256K Flow entries for VPLS (IPv4 and IPv6) • 256K Flow entries for MPLS (IPv4 and IPv6) 	18.2R1
<i>Inline Video Monitoring</i>	-
<i>Inline 6rd and 6to4 Configuration Guidelines</i>	-
<i>Intelligent Oversubscription</i>	18.2R1
<i>Integrated routing and bridging (IRB)</i>	18.2R1
Unified <i>In-service software upgrade (Unified ISSU)</i>	-
Interoperability <ul style="list-style-type: none"> • Interoperability with existing MPCs • Interoperability with 100-Gigabit Ethernet Interfaces 	-

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
IPv4	18.2R1
IPv4 multicast	18.2R1
IPv6	18.2R1
IPv6 MLD	18.2R1
IPv6 multicast	18.2R1
IPv6 Neighbor Discovery	18.2R1
<i>IS-IS</i>	18.2R1
ITU-T Y.1731 timestamping support on MX Series routers	18.2R1
Flow monitoring and services: <ul style="list-style-type: none"> • Active monitoring (cflowed version 9 templates) • Port mirroring family VPLS, bridge CCC encapsulation (VPWS) • Packet slice for port mirroring 	Release <ul style="list-style-type: none"> • 18.2R1 • 18.2R1 • 18.2R1
<i>Junos Continuity Supported HW</i>	NA

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	18.2R1
<i>Minimum LDP Configuration</i>	18.2R1
Layer 2 features: <ul style="list-style-type: none"> • Trunk ports • Layer 2 support for MX Series Virtual Chassis • Layer 2 and Layer 2.5, IRB and spanning tree protocols (xSTP) • IEEE 802.1ad provider bridges • Layer 2 protocol tunneling (L2PT) support • Layer 2 Tunneling Protocol (L2TP) • Multichassis LAG—active/active and active/standby • Multichassis LAG—active/active with IGMP snooping • IGMP snooping with bridging, IRB, and VPLS 	Release <ul style="list-style-type: none"> • 18.2R1 • - • 18.2R1 • 18.2R1 • 18.2R1 • 18.2R1 • 18.2R1 • 18.2R1 • 18.2R1 • 18.2R1
Layer 2 VPN interfaces support VLAN ID list	18.2R1
<i>Link aggregation (IEEE 802.3ad)</i>	18.2R1
<i>Link Aggregation Control Protocol (LACP)</i>	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<i>Link Layer Discovery Protocol (LLDP)</i>	18.2R1
Local loopback	18.2R1
<i>MAC learning, policing, accounting, and filtering</i>	18.2R1
Mobile IP	-
Multichassis Link Aggregation	18.2R1
Multiple Tag Protocol Identifiers (TPIDs)	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<p><i>MPLS:</i></p> <ul style="list-style-type: none"> • Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN) • LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV) • RSVP graceful restart interoperability with Cisco using Nodal Hello • Failure action on BFD session down of RSVP LSPs • OSPF and IS-IS loop-free alternates (LFA) • 4/5 label MPLS operation • Virtual circuit connectivity verification (VCCV) BFD • MPLS-FRR bypass link protection • Load sharing across 64 ECMP next hops • MPLS-FRR VPLS instance prioritization • Five label stack on ingress 	18.2R1
MPLS node protection, link protection, and statistics for static LSPs	18.2R1
<i>mvrp</i>	-
<i>Multitopology routing</i>	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Nonstop active routing (NSR)	18.2R1
Network Edge Security (802.1x)	-
<i>OSPF</i>	18.2R1
Optical Transport Network <ul style="list-style-type: none"> • Link Degrade Monitoring • FEC Modes • Bit Error Rate (BER) 	-
Packet mirroring	18.2R1
Precision Time Protocol (PTP) (IEEE 1588)	-
IEEE 802.1ah provider backbone bridging (PBB)	-
<i>RSVP Overview</i>	18.2R1
<i>RIP</i>	18.2R1
RFC2544 Benchmarking Tests	-
<i>SNMP</i>	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Spanning tree protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	18.2R1
Stateful Load Balancing for Aggregated Ethernet Interfaces	-

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<p><i>Subscriber management and services:</i></p> <ul style="list-style-type: none"> • Enhanced subscriber management • Aggregated Ethernet over static VLANs • Aggregated Ethernet over dynamic VLANs • DHCP access model • Dynamic adjustment of shapers • Dynamic PPPoE subscriber interface creation based on PPPoE service name table configuration • Dynamic profiles • Dynamic shaping, scheduling, and queuing • Dynamic VLANs • Static and dynamic PPPoE subscriber interfaces 	21.2R1
<p>Synchronous Ethernet</p> <ul style="list-style-type: none"> • Hybrid Mode • Line Card Redundancy 	-
<p><i>Two-Way Active Measurement Protocol (TWAMP)</i></p>	-
<p>Tunnel services</p> <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
Unnumbered Ethernet Interface	18.2R1
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Channels defined by two stacked VLAN tags • Flexible VLAN tagging • IP service for nonstandard TPID and stacked VLAN tags 	18.2R1
Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/ MPLS services	-
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	18.2R1
Virtual private network (VPN)	18.2R1

Table 50: Protocols and Applications Supported by JNP10K-LC2101 on the MX10008 and MX10016 Routers (Continued)

Protocol or Application	JNP10K-LC2101
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i>	18.2R1
VPLS packet flooding to the right set of interfaces across mesh groups	-
MACSec Capabilities: <ul style="list-style-type: none"> • GCM-AES-128 MACSec Encryption, 802.1AE-2006 • GCM-AES-256 MACSec Encryption, 802.1AEbn-2011 • GCM-AES-XPB-128 Cipher Suite, 802.1AEbw-2013 • GCM-AES-XPB-256 Cipher Suite, 802.1AEbw-2013 	-

RELATED DOCUMENTATION

Downgrading JNP10K-LC2101 to Provide Decreased Bandwidth

Line card (MX10K-LC2101)

Protocols and Applications Supported by the MPC10E

Table 51 on page 616 contains protocols and applications supported by the MPC10E line cards (MPC10E-15C-MRATE and MPC10E-10C-MRATE) on the MX240, MX480, and MX960 routers.

A dash indicates that the protocol or application is not supported.

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers

Protocol or Application	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
<i>Access Node Control Protocol (ANCP)</i>	-	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Standard 	Release <ul style="list-style-type: none"> • 19.3R1 • 19.1R1 	Release <ul style="list-style-type: none"> • - • 19.2R1
Accepts traffic destined for Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Standard 	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
<p><i>Bidirectional Forwarding Detection protocol (BFD)</i></p> <ul style="list-style-type: none"> • Centralized BFD • Distributed BFD • Inline BFD (single-hop only) • Single-hop BFD • Multihop BFD • Micro BFD • BFD over Integrated routing and bridging (IRB) interfaces • BFD over Pseudowire over LT and RLT interfaces • Virtual circuit connectivity verification (VCCV) BFD for Layer2 VPNs and Layer2 circuits • VCCV BFD for VPLS • BFD authentication • Seamless BFD 	<p>Release</p> <ul style="list-style-type: none"> • 19.1R1 • 19.1R1S1 • 19.1R1S1 • 19.1R1S1 • 19.1R1S1 • 19.1R1S1 • 19.3R1 • 19.3R1 • 19.3R1 • 19.3R1 • 19.3R1 • - • - • - 	<p>Release</p> <ul style="list-style-type: none"> • 19.2R1 • 19.2R1 • 19.2R1 • 19.2R1 • 19.2R1 • 19.2R1 • 19.3R1 • 19.3R1 • 19.3R1 • 19.3R1 • 19.3R1 • - • - • -
Internet Control Message Protocol (ICMP) and ICMPv6	19.1R1	19.2R1
<i>Border Gateway Protocol (BGP)</i>	19.1R1	19.2R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Bridge protocol data units (BPDUs)	-	-
BGP/MPLS virtual private networks (VPNs)	19.1R1	19.2R1
Routing Instance: <ul style="list-style-type: none"> • Logical system • Virtual routing and forwarding (VRF) 	19.1R1	19.2R1
Load Balancing	19.1R1	19.2R1
Dynamic Host Configuration Protocol (DHCP)	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Maintain CoS across internal tunnel interfaces	19.1R1	19.2R1
Packet Rewrites on DSCP, Inet Precedence (both Ipv4 and Ipv6) and EXP bits	19.1R1	19.2R1
Behavior aggregate (BA) classification (except IEEE classifiers)	19.1R1	19.2R1
BA classification based on 802.1p of payload for core-facing VPLS interfaces	19.4R1	19.4R1
BA DSCP classification of MPLS packets for L3VPN and MPLS interfaces	19.1R1	19.2R1

BA DSCP classification of MPLS packets for VPLS LSI interfaces	-	-
BA DSCP classification for VPLS/CCC family	19.4R1	19.4R1
Rate limit option for per-port queues	19.1R1	19.2R1
Queue depth monitoring	19.3R1	19.3R1
Configurable .1p inheritance: push and swap from the hidden tag	20.4R1	20.4R1
Configurable shaping overhead for scheduling	19.1R1	19.2R1
Class of service (CoS) per port: <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	19.1R1	19.2R1

<p>Class of service (CoS) per virtual LAN (VLAN):</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • IEEE 802.1p classification 	<p>Release</p> <ul style="list-style-type: none"> • 19.1R1 • 19.4R1 (except for circuit cross connect or CCC) • 19.4R1 (except for circuit cross connect or CCC) 	<p>Release</p> <ul style="list-style-type: none"> • 19.2R1 • 19.4R1 (except for circuit cross connect or CCC) • 19.4R1 (except for circuit cross connect or CCC)
<p>Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	<p>Release</p> <ul style="list-style-type: none"> • - • - • - • - • - • - • - 	<p>Release</p> <ul style="list-style-type: none"> • - • - • - • - • - • - • -
<p>Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i>.</p> <p>NOTE: Only egress is supported.</p> <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	<p>-</p>	<p>-</p>
<p><i>Distributed Denial-of-Service (DDoS) Protection</i></p>	<p>19.1R1</p>	<p>19.2R1</p>

<i>DVMRP</i> and GRE support—access side and server side	-	-
<i>Ethernet Ring Protection Switching</i> with multiple G.8032 instances	-	-
<i>Flexible Queuing Mode</i>	-	-
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	-	-
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	-	-
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	-	-
<p>IEEE 802.1ag:</p> <ul style="list-style-type: none"> • Maintenance association intermediate point (MIP) • Continuity check message (CCM) • Stacked VLAN tagging • Trunk ports • VPLS • VPWS • VLAN circuit cross-connect (CCC) encapsulation and • Translational cross-connect (TCC) encapsulation 	<p>Release</p> <ul style="list-style-type: none"> • - • - • 19.1R1 • - • - • 19.1R1 • 19.1R1 • - 	<p>Release</p> <ul style="list-style-type: none"> • - • - • 19.2R1 • - • - • 19.2R1 • 19.2R1 • -
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Configuring Port Status TLV and Interface Status TLV</i>	19.1R1	19.2R1

IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	19.1R1	19.2R1
--	--------	--------

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Family Inet/Inet6/MPLS	19.1R1	19.2R1
All the static match conditions/actions	19.1R1	19.2R1
Dynamic actions (port-mirroring, next hop, routing instance)	19.1R1	19.2R1
Interface-specific filters	19.1R1	19.2R1
BGP Flow specification	19.1R1	19.2R1
Two color and three color policers (SRTCM and TRTCM)	19.1R1	19.2R1
FTF (filter attachment on routing table)	19.1R1	19.2R1
Firewall attachment on Aggregated Ethernet Interfaces (AE)	19.1R1	19.2R1
Hierarchical Policers	19.4R1	19.4R1
Family Any/CCC (for firewall)	19.2R1	19.2R1
Percentage Bandwidth policers, Shared Bandwidth policers, Logical Interface policers	19.4R1	19.4R1
Physical interface policers	19.4R1	19.4R1
Firewall Based GRE ENCAP/DECAP	19.2R1	19.2R1

Fast lookup filter	19.2R1	19.2R1
Revision (firewall filter counters only)	19.2R1	19.2R1
Filter-based tunneling: <ul style="list-style-type: none"> • GRE-in-UDP encapsulation and decapsulation • MPLS-over-UDP decapsulation 	19.3R1	19.3R1
Filter-based forwarding: <ul style="list-style-type: none"> • Next-IP • Next-interface 	19.3R1	19.3R1
Interface-group	19.3R1	19.3R1
Family bridge filter	19.3R1	19.3R1
VPLS family filter	19.3R1	19.3R1
Filter attachment on IRB, Pseudowire over LT and RLT interfaces, and bridge-domain	19.3R1	19.3R1
<i>Flexible Ethernet encapsulation</i>	19.1R1	19.2R1
<i>Graceful Routing Engine Switchover (GRES)</i>	19.1R1	19.2R1
IGMPv3 support with snooping disabled	19.1R1	19.2R1
<i>Intelligent Oversubscription on MIC and MPC Interfaces Overview</i>	19.1R1	19.2R1
<i>Integrated routing and bridging (IRB)</i>	19.4R1	19.4R1

Unified <i>In-service software upgrade (Unified ISSU)</i>	-	-
Interoperability with MPCs	19.1R1	19.2R1
Interoperability with MS-MPC/MS-MICs	20.2R1	20.2R1
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	-	-
IPv4	19.1R1	19.2R1
IPv4 multicast	Release	Release
<ul style="list-style-type: none"> • PIM sparse mode (PIM-SM) • PIM source-specific multicast (PIM-SSM) • Point to multipoint (P2MP) • Multicast-only fast reroute (MoFRR) • Draft-rosen MVPN 	<ul style="list-style-type: none"> • 19.1R1 • 19.1R1 • 19.3R1 • 19.3R1 • 19.3R1 	<ul style="list-style-type: none"> • 19.2R1 • 19.2R1 • 19.3R1 • 19.3R1 • 19.3R1
<i>IPv6</i>	19.1R1	19.2R1
IPv6 MLD	19.1R1	19.2R1
IPv6 multicast	Release	Release
<ul style="list-style-type: none"> • PIM sparse mode (PIM-SM) • PIM source-specific multicast (PIM-SSM) • Point to multipoint (P2MP) • Multicast-only fast reroute (MoFRR) • Draft-rosen MVPN 	<ul style="list-style-type: none"> • 19.1R1 • 19.1R1 • 19.3R1 • 19.3R1 • 19.3R1 	<ul style="list-style-type: none"> • 19.2R1 • 19.2R1 • 19.3R1 • 19.3R1 • 19.3R1

IPv6 Neighbor Discovery	19.1R1	19.2R1
IS-IS	19.1R1	19.2R1
ITU-T Y.1731 timestamping support on MX Series routers	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN)	19.1R1	19.2R1
LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV)	19.4R1	19.4R1
RSVP graceful restart interoperability with Cisco using Nodal Hello	-	-
Failure action on BFD session down of RSVP LSPs	19.3R1	19.3R1
OSPF loop-free alternates (LFA)	20.2R1	20.2R1
4/5 label MPLS operation	19.1R1	19.2R1
Virtual circuit connectivity verification (VCCV) BFD	19.3R1	19.3R1
Point to multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet)	19.4R1	-
MPLS-FRR bypass link protection	19.1R1	19.2R1
Load sharing across 64 ECMP next hops	19.1R1	19.2R1

MPLS-FRR VPLS instance prioritization	-	-
Five label stack on ingress	19.1R1	19.2R1
MPLS node protection, link protection, and statistics for static LSPs	19.1R1	19.2R1
<i>mvrp</i>	-	-
<i>Multitopology routing</i>	-	-
Nonstop active routing (NSR)	19.1R1	19.2R1
<i>OSPF</i>	19.1R1	19.2R1
Packet mirroring	19.1R1	19.2R1
Precision Time Protocol (PTP) (IEEE 1588)	19.1R1	19.2R1
IEEE 802.1ah provider backbone bridging (PBB)	-	-
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	-	-
<i>RSVP Overview</i>	19.1R1	19.2R1
<i>RIP</i>	19.1R1	19.2R1
<i>SNMP</i>	19.1R1	19.2R1

Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	-	-
Subscriber Management and Services: <ul style="list-style-type: none"> • Enhanced subscriber management—Uplink communications to the core network only 	19.3R1	19.3R1
Synchronous Ethernet	19.2R1	19.2R1
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	19.2R1	19.2R1
Tunnel services <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	19.3R1	19.3R1
Unified in-service software upgrade (ISSU)	-	-
Unnumbered Ethernet Interface	19.3R1	19.3R1

<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Flexible VLAN tagging • Single VLAN tags • Dual VLAN tags • IP service for nonstandard TPID and stacked VLAN tags 	19.1R1	19.2R1
<p>Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services</p>	-	-
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	20.1R1 (Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG)	20.1R1 (Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG)
<p>Virtual private network (VPN)</p>	19.1R1	19.2R1

Support for the following features in hyper-mode:	19.2R1	19.2R1
<ul style="list-style-type: none"> Configuring ICMP redirects and generating ICMP redirect messages. Padding VLAN packets to a minimum frame size of 68 bytes, by using the existing command set interfaces interface-name gigether-options pad-to-minimum-frame-size. Collecting interface family statistics for IPv4 and IPv6, by using the existing command show interfaces statistics detail interface-name. 		
<i>Virtual Router Redundancy Protocol (VRRP) for IPv4 and IPv6</i>	19.3R2	19.3R2
VPLS packet flooding to the right set of interfaces across mesh groups	-	-
WAN-PHY mode	19.1R1	19.2R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Flow monitoring and services	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Inline IP Flow Information Export (IPFIX)	19.1R1	19.2R1
Inline flow monitoring for MPLS, MPLS-IPv4 and MPLS-IPv6 traffic (IPFIX and V9 formats)	19.3R1	19.3R1
Inline flow monitoring for IPv4 or IPv6 traffic on next-hop based GRE Tunnels and ps interfaces	19.3R1	19.3R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Flow monitoring and services	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Port mirroring for family bridge CCC encapsulation	19.3R1	19.3R1
Port mirroring for VPLS	19.4R1	19.4R1
Packet slice for port mirroring	-	-
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	19.1R1	19.2R1
<i>Minimum LDP Configuration</i>	19.1R1	19.2R1
Routing Engine-Based Sampling	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

MACSec	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
GCM-AES-128 MACSec Encryption, 802.1AE-2006	19.1R1	19.2R1
GCM-AES-256 MACSec Encryption, 802.1AEbn-2011	19.1R1	19.2R1
Mobile IP	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

MACSec	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Multichassis link aggregation	-	-
Multiple Tag Protocol Identifiers (TPIDs)	19.1R1	19.2R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Layer 2 Features	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Trunk ports	19.2R1	19.2R1
Layer 2 support for MX Series Virtual Chassis	19.2R1	19.2R1
Layer 2 and Layer 2.5, IRB and Spanning Tree Protocols (xSTP)	19.3R1	19.3R1
IEEE 802.1ad provider bridges	19.3R1	19.3R1
L2TP silent failover and peer interface	19.3R1	19.3R1
Multichassis LAG—active/active and active/standby	-	-
Multichassis LAG—active/active with IGMP snooping	-	-

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

Layer 2 Features	First Supported Junos OS Release for MPC10E-15C-MRATE	First Supported Junos OS Release for MPC10E-10C-MRATE
Link aggregation group (LAG)—VLAN-CCC encapsulation	19.3R1	19.3R1
IGMP snooping with bridging, IRB, and VPLS	19.3R1	19.3R1
Layer 2 VPN interfaces support VLAN ID list	19.3R1	19.3R1
<i>Link aggregation (IEEE 802.3ad)</i>	19.3R1	19.3R1
<i>Link Aggregation Control Protocol (LACP)</i>	19.2R1	19.2R1
<i>Link Layer Discovery Protocol (LLDP)</i>	19.3R1	19.3R1
Local loopback	19.3R1	19.3R1
<i>MAC learning, policing, accounting, and filtering</i>	19.3R1	19.3R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

MPLS	Features supported in Junos OS Release for MPC10E-15C-MRATE	Features supported in Junos OS Release for MPC10E-10C-MRATE
End-to-end LSP MPLS ping	20.2R1	20.2R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

MPLS	Features supported in Junos OS Release for MPC10E-15C-MRATE	Features supported in Junos OS Release for MPC10E-10C-MRATE
LDP pseudowire auto-sensing	20.2R1	20.2R1
LSP ping for circuit cross-connect (CCC) and CCC secondary standby LSP	20.2R1	20.2R1
Edge node failure protection of LDP-signaled pseudowire	20.2R1	20.2R1
Link and node protection for static LSPs	20.2R1	20.2R1
Support of statistics for static LSPs	20.2R1	20.2R1
Stitching of pseudowire segments (multisegment pseudowires with BGP Layer 2 VPN)	20.2R1	20.2R1
Cross-connect logical interface to two un signaled virtual circuits terminating on different egress Provider Edge (PE) devices	20.2R1	20.2R1
Generic Associated Channel Label (GAL) and Generic Associated Channel Header (G-Ach) and application to BFD or LSP ping	20.2R1	20.2R1
Remote loop-free alternates (LFA) over LDP tunnels in IS-IS networks.	19.1R1	19.1R1
Ultimate hop popping (UHP) support for LSPs	20.2R1	20.2R1

Table 51: Protocols and Applications Supported by MPC10E line cards in the MX240, MX480, and MX960 Routers (Continued)

MPLS	Features supported in Junos OS Release for MPC10E-15C-MRATE	Features supported in Junos OS Release for MPC10E-10C-MRATE
GMPLS co-routed packet LSPs	20.2R1	20.2R1
LDP downstream-on-demand	20.2R1	20.2R1
Seamless Multicast MPLS: intSegmented P2P and P2MP LSPs with MVPN interworking	20.2R1	20.2R1
PS Interface support for PW Redundancy Condition	20.2R1	20.2R1

RELATED DOCUMENTATION

[MPC10E-15C-MRATE | 220](#)

[MPC10E-10C-MRATE | 215](#)

Protocols and Applications Supported by the MX2K-MPC11E

Table 52 on page 635 contains protocols and applications supported by the MX2K-MPC11E line cards on the MX2010 and MX2020 routers.

NOTE: The MX2K-MPC11E line card is supported in Junos OS 19.3R2 and later 19.3 releases and in Junos OS 20.1R1 and later Junos OS releases. It is not supported in Junos OS 19.4.

A dash indicates that the protocol or application is not supported.

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers

Protocol or Application	First Supported Junos OS Release for MX2K-MPC11E
<i>Access Node Control Protocol (ANCP)</i>	-
Accepts traffic destined for generic routing encapsulation (GRE) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Standard 	Release <ul style="list-style-type: none"> • - • 19.3R2
Accepts traffic destined for Distance Vector Multicast Routing Protocol (DVMRP) (IP-in-IP) tunnels <ul style="list-style-type: none"> • <i>Dynamic</i> • Standard 	-
Bidirectional Forwarding Detection protocol (BFD)	
Centralized BFD	19.3R2
Distributed BFD	19.3R2
Inline BFD (single-hop only)	19.3R2
Single-hop BFD	19.3R2
Multihop BFD	19.3R2
Micro BFD	19.3R2
BFD over Integrated routing and bridging (IRB) interfaces	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Protocol or Application	First Supported Junos OS Release for MX2K-MPC11E
BFD over Pseudowire over LT and RLT interfaces	19.3R2
Virtual circuit connectivity verification (VCCV) BFD for Layer2 VPNs and Layer2 circuits	19.3R2
VCCV BFD for VPLS	-
BFD authentication	-
Seamless BFD	-
Internet Control Message Protocol (ICMP) and ICMPv6	19.3R2
<i>Border Gateway Protocol (BGP)</i>	19.3R2
Bridge protocol data units (BPDUs)	-
BGP/MPLS virtual private networks (VPNs)	19.3R2
Routing Instance: <ul style="list-style-type: none"> • Logical system • Virtual routing and forwarding (VRF) 	19.3R2
Load Balancing	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Class of service (CoS)	First Supported Junos OS Release for MX2K-MPC11E
Maintain CoS across internal tunnel interfaces	19.3R2
Packet Rewrites on DSCP, Inet Precedence (both Ipv4 and IPv6) and EXP bits	19.3R2
Behavior aggregate (BA) classification	19.3R2
BA classification based on 802.1p of payload for core-facing VPLS interfaces	19.3R2
BA DSCP classification of MPLS packets for L3VPN and MPLS interfaces	19.3R2
BA DSCP classification of MPLS packets for VPLS LSI interfaces	19.3R2
Rate limit option for per-port queues	19.3R2
BA DSCP classification for VPLS/CCC family	19.3R2
Configurable shaping overhead for scheduling	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Class of service (CoS)	First Supported Junos OS Release for MX2K-MPC11E
<p>Class of service (CoS) per port:</p> <ul style="list-style-type: none"> • Eight queues per port • Excess-rate and excess-priority configurations at the queue level • Shaping at the port level • Shaping at the queue level • Scheduling of queues based on the weighted round-robin (WRR) per excess-priority class • Round-robin scheduling of the queues per priority class • Weighted random early detection (WRED) 	19.3R2
<p>Class of service (CoS) per virtual LAN (VLAN):</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • IEEE 802.1p classification 	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Class of service (CoS)	First Supported Junos OS Release for MX2K-MPC11E
<p>Class of service (CoS) per Point-to-Point Protocol over Ethernet (PPPoE) or Dynamic Host Configuration Protocol (DHCP) subscriber interfaces:</p> <ul style="list-style-type: none"> • Accounting, filtering, and policing • IEEE 802.1p rewrite • Classification • Excess-rate and excess-priority configuration at the queue level • Shaping at the queue level • Scheduling of queues based on weighted round-robin (WRR) per priority class • Weighted random early detection (WRED) 	<p>Release</p> <ul style="list-style-type: none"> • - • - • - • - • - • - • - • -
<p>Ingress and egress hierarchical class-of-service (CoS) shaping and <i>hierarchical-scheduler</i>.</p> <p>NOTE: Only egress is supported.</p> <ul style="list-style-type: none"> • Group of virtual LANs (VLANs) level • VLAN level • Port level 	<p>19.3R2</p>
<p>Queue depth monitoring</p>	<p>19.3R2</p>

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Layer 2 Features	First Supported Junos OS Release for MX2K-MPC11E
Trunk ports	19.3R2
Layer 2 support for MX Series Virtual Chassis	19.3R2
Layer 2 and Layer 2.5, IRB and Spanning Tree Protocols (xSTP)	19.3R2
IEEE 802.1ad provider bridges	19.3R2
L2TPv2 silent failover and peer interface	19.3R2
Multichassis LAG—active/active and active/standby	-
Multichassis LAG—active/active with IGMP snooping	-
Link aggregation group (LAG)—VLAN-CCC encapsulation	19.3R2
IGMP snooping with bridging, IRB, and VPLS	-
Layer 2 VPN interfaces support VLAN ID list	19.3R2
<i>Link aggregation (IEEE 802.3ad)</i>	19.3R2
<i>Link Aggregation Control Protocol (LACP)</i>	19.3R2
<i>Link Layer Discovery Protocol (LLDP)</i>	19.3R2
Local loopback	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Layer 2 Features	First Supported Junos OS Release for MX2K-MPC11E
<i>MAC learning and policing</i>	19.3R2
<i>MAC filtering</i>	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Layer 2 Services supported with pseudowire headend termination (PWHT)	First Supported Junos OS Release for MX2K-MPC11E
Layer 2 circuit terminates into the following Layer 2 services over the logical tunnel (lt) and redundant logical tunnel (rlt) <ul style="list-style-type: none"> • Bridge domain • EVPN Single home • VPLS 	20.1R1
VLAN cross-connect on transport interface	20.1R1
Psuedowire service Layer 2 interface <ul style="list-style-type: none"> • MAC clear, MAC limit, MAC move, MAC pinning, and Static MAC • Statistics 	20.1R1

Psuedowire service interfaces <ul style="list-style-type: none"> • MAC Learning, MAC Table Aging, and forwarding on aggregated Ethernet interfaces • Simple dual tag bridging (with VLAN map operations) • BUM traffic handling including split horizon • Native outer VLAN, VLAN tags in routing instances • Outer list, Inner list, and Outer VLAN-id list • Static MAC and Stacked VLAN • input-vlan-maps and output-vlan-maps • implicit-vlan-rewrites • no-local-switching, local-switching, and policer/ filter • mac-table-size, mac-aging-time, and no-mac-learning • interface-mac-limit and interface-mac-pinning • tag-protocol-id for Layer 2 services over logical tunnel interface (lt) 	20.1R1
---	--------

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Firewall filters and policers	First Supported Junos OS Release for MX2K-MPC11E
Family Inet/Inet6/MPLS	19.3R2
All the static match conditions/actions	19.3R2
Dynamic actions (port-mirroring, next hop, routing instance)	19.3R2
Interface-specific filters	19.3R2
BGP Flow specification	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Firewall filters and policers	First Supported Junos OS Release for MX2K-MPC11E
Two color and three color policers (SRTCM and TRTCM)	19.3R2
FTF (filter attachment on routing table)	19.3R2
Firewall attachment on Aggregated Ethernet Interfaces (AE)	19.3R2
Hierarchical Policers	19.3R2
Family Any/CCC (for firewall)	19.3R2
Percentage Bandwidth policers	-
Shared Bandwidth policers	-
Logical Interface policers	19.3R2
Physical interface policers	-
Firewall Based GRE ENCAP/DECAP	19.3R2
Fast lookup filter	19.3R2
Jvision (firewall filter counters only)	19.3R2
Filter-based tunneling: <ul style="list-style-type: none"> • GRE-in-UDP encapsulation and decapsulation • MPLS-over-UDP decapsulation 	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Firewall filters and policers	First Supported Junos OS Release for MX2K-MPC11E
Filter-based forwarding: <ul style="list-style-type: none"> • Next-IP • Next-interface 	19.3R2
Interface-group	19.3R2
Family bridge filter	19.3R2
VPLS family filter	19.3R2
Filter attachment on IRB, PSoLT, PSoRLT and bridge-domain	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Other Features	First Supported Junos OS Release for MX2K-MPC11E
<i>Distributed Denial-of-Service (DDoS) Protection</i>	19.3R2
<i>DVMRP and GRE support—access side and server side</i>	-
<i>Managing Power</i>	19.3R2
<i>Ethernet Ring Protection Switching with multiple G.8032 instances</i>	-
<i>Flexible Queuing Mode</i>	-
<i>IEEE 802.1ag Ethernet OAM Continuity Check protocol</i>	-

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Other Features	First Supported Junos OS Release for MX2K-MPC11E
<i>IEEE 802.1ag Ethernet OAM Linktrace protocol</i>	-
<i>IEEE 802.1ag Ethernet OAM Loopback protocol</i>	-
IEEE 802.1ag: <ul style="list-style-type: none"> • Maintenance association intermediate point (MIP) • Continuity check message (CCM) • Stacked VLAN tagging • Trunk ports • VPLS • VPWS • VLAN circuit cross-connect (CCC) encapsulation and • Translational cross-connect (TCC) encapsulation 	Release <ul style="list-style-type: none"> • - • - • 19.3R2 • - • - • 19.3R2 • 19.3R2 • -
IEEE 802.1ag optional type, length, and value (TLVs) support <i>Configuring Port Status TLV and Interface Status TLV</i>	19.3R2
IEEE 802.3ah distributed periodic packet management (PPM) process, alarm indication signal (AIS), and remote defect indication (RDI)	19.3R2
<i>Flexible Ethernet encapsulation</i>	19.3R2
<i>Graceful Routing Engine Switchover (GRES)</i>	19.3R2
IGMPv3 support with snooping disabled	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Other Features	First Supported Junos OS Release for MX2K-MPC11E
<i>Intelligent Oversubscription on MIC and MPC Interfaces Overview</i>	19.3R2
<i>Integrated routing and bridging (IRB)</i>	-
Unified <i>In-service software upgrade (Unified ISSU)</i>	-
Interoperability with MPCs	19.3R2
Interoperability with MS-DPCs/MS-MPCs	-
Interoperability with MX Series Flexible PIC Concentrators (MX-FPC)	-
IPv4	19.3R2
IPv4 multicast <ul style="list-style-type: none"> • PIM sparse mode (PIM-SM) • PIM source-specific multicast (PIM-SSM) • Point to multipoint (P2MP) • Multicast-only fast reroute (MoFRR) • Draft-rosen MVPN 	Release <ul style="list-style-type: none"> • 19.3R2 • 19.3R2 • 19.3R2 • 19.3R2 • 19.3R2
IPv6	19.3R2
IPv6 MLD	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Other Features	First Supported Junos OS Release for MX2K-MPC11E
IPv6 multicast <ul style="list-style-type: none"> • PIM sparse mode (PIM-SM) • PIM source-specific multicast (PIM-SSM) • Point to multipoint (P2MP) • Multicast-only fast reroute (MoFRR) • Draft-rosen MVPN 	Release <ul style="list-style-type: none"> • 19.3R2 • 19.3R2 • 19.3R2 • 19.3R2 • 19.3R2
IPv6 Neighbor Discovery	19.3R2
<i>IS-IS</i>	19.3R2
ITU-T Y.1731 timestamping support on MX Series routers	-
<i>Optimizing Fabric Path for Abstracted Fabric Interface</i>	20.1R1

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
Switching of pseudowire segments (multisegment pseudowires with BGP-L2VPN)	19.3R2
LDP signaling for VPLS (LDP-VPLS) and MAC flush message processing (MAC-FLUSH-TLV)	-

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
RSVP graceful restart interoperability with Cisco using Nodal Hello	-
Failure action on BFD session down of RSVP LSPs	19.3R2
OSPF and IS-IS loop-free alternates (LFA)	19.3R2
4/5 label MPLS operation	19.3R2
Virtual circuit connectivity verification (VCCV) BFD	19.3R2
Point to multipoint using the enhanced-ip command (support for NG-MVPN and P2MP load balancing over aggregated Ethernet)	-
MPLS-FRR bypass link protection	19.3R2
Load sharing across 64 ECMP next hops	19.3R2
MPLS-FRR VPLS instance prioritization	-
Five label stack on ingress	19.3R2
MPLS node protection, link protection, and statistics for static LSPs	19.3R2
End-to-end LSP MPLS ping	20.2R1
LDP pseudowire auto-sensing	20.2R1

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
LSP ping for circuit cross-connect (CCC) and CCC secondary standby LSP	20.2R1
Edge node failure protection of LDP-signaled pseudowire	20.2R1
Link and node protection for static LSPs	20.2R1
Support of statistics for static LSPs	20.2R1
Stitching of pseudowire segments (multisegment pseudowires with BGP Layer 2 VPN)	20.2R1
Cross-connect logical interface to two un signaled virtual circuits terminating on different egress Provider Edge (PE) devices	20.2R1
Generic Associated Channel Label (GAL) and Generic Associated Channel Header (G-Ach) and application to BFD or LSP ping	20.2R1
Ultimate hop popping (UHP) support for LSPs	20.2R1
GMPLS co-routed packet LSPs	20.2R1
LDP downstream-on-demand	20.2R1
Seamless Multicast MPLS: intSegmented P2P and P2MP LSPs with MVPN interworking	20.2R1
PS Interface support for PW Redundancy Condition	20.2R1

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
<i>mvrp</i>	-
<i>Multitopology routing</i>	-
Nonstop active routing (NSR)	19.3R2
<i>OSPF</i>	19.3R2
Packet mirroring	19.3R2
Precision Time Protocol (PTP) (IEEE 1588)	19.3R2
IEEE 802.1ah provider backbone bridging (PBB)	-
Push a tag on Ethernet VPLS and Ethernet CCC tag encapsulations	-
<i>RSVP Overview</i>	19.3R2
<i>RIP</i>	19.3R2
<i>SNMP</i>	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
Spanning Tree Protocols: <ul style="list-style-type: none"> • <i>IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)</i> (part of IEEE 802.1Q VLANs) • <i>IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)</i> • IEEE 802.1D Spanning Tree Protocol (STP) • Per-VLAN Spanning Tree (PVST) • Bridge protocol data units (BPDUs) guard and loop guard • STP inter-protocol action profiles and MAC flush (in VPLS multi-homing, flush all MACs when there is a change in the STP interface state due to root protect) 	-
Subscriber Management and Services: <ul style="list-style-type: none"> • Enhanced subscriber management—Uplink communications to the core network only 	19.3R2
Synchronous Ethernet	19.3R2
<i>Two-Way Active Measurement Protocol (TWAMP)</i>	19.3R2
Tunnel services <ul style="list-style-type: none"> • Clear DF-Bit (Don't Fragment Bit) 	19.3R2
Unified in-service software upgrade (ISSU)	-
Unnumbered Ethernet Interface	-

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
<p><i>VLANs IEEE 802.1Q:</i></p> <ul style="list-style-type: none"> • VLAN stacking and rewriting • Flexible VLAN tagging • Single VLAN tags • Dual VLAN tags • IP service for nonstandard TPID and stacked VLAN tags 	19.3R2
<p>Virtual Chassis: MPLS IPv4 and IPv6, unicast, multicast forwarding, VPLS, NSR for Layer 3/MPLS services</p>	-
<p><i>Virtual private LAN service (VPLS):</i></p> <ul style="list-style-type: none"> • BGP multihoming for inter-AS VPLS • Gigabit Ethernet as core-facing interface • Configurable label block sizes • Hashing L3/L4 fields under Ethernet pseudowire for VPLS encapsulation, CCC encapsulation, and MPLS encapsulation • VPLS flood forwarding table filter (FTF), input FTF • Broadcast, unicast unknown, and multicast (BUM) traffic hashing over LAG 	-
<p>Virtual private network (VPN)</p>	19.3R2
<p><i>Virtual Router Redundancy Protocol (VRRP) for IPv4</i></p>	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

<i>MPLS</i>	Features supported in Junos OS Release for MX2K-MPC11E
VPLS packet flooding to the right set of interfaces across mesh groups	-
WAN-PHY mode	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

Flow monitoring and services	First Supported Junos OS Release for MX2K-MPC11E
Inline IP Flow Information Export (IPFIX)	19.3R2
Inline flow monitoring for MPLS, MPLS-IPv4 and MPLS-IPv6 traffic (IPFIX and V9 formats)	19.3R2
Inline flow monitoring for IPv4 or IPv6 traffic on next-hop based GRE Tunnels and ps interfaces	19.3R2
Port mirroring family bridge CCC encapsulation	19.3R2
Packet slice for port mirroring	-
<i>Labeled-switched-paths (LSPs)</i> including accounting, policers, and filtering	19.3R2
<i>Minimum LDP Configuration</i>	19.3R2

Table 52: Protocols and Applications Supported by MPC11E line cards in the MX2010 and MX2020 Routers (Continued)

MACSec	First Supported Junos OS Release for MX2K-MPC11E
GCM-AES-128 MACSec Encryption, 802.1AE-2006	19.3R2
GCM-AES-256 MACSec Encryption, 802.1AEbn-2011	19.3R2
Mobile IP	-
Multichassis link aggregation	-
Multiple Tag Protocol Identifiers (TPIDs)	19.3R2