




Secure in-band and out-of-band management for servers, routers, switches, firewalls and other network equipment.

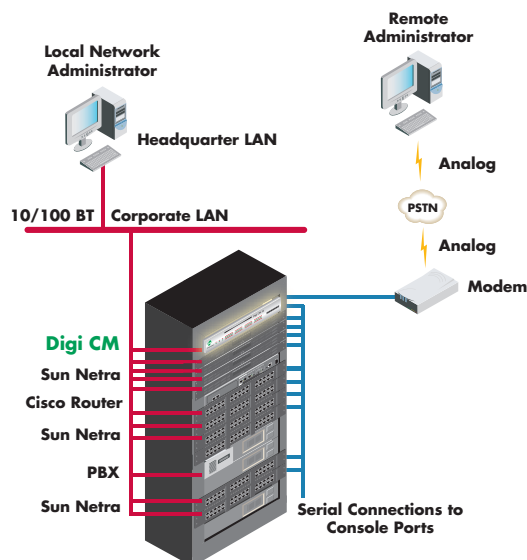

Features/Benefits

- Sun, Cisco, IBM, HP, UNIX, Linux and Microsoft Windows Server™ 2003 compatible
- **freeKVM™** for remote desktop access
- RemotePorts extends management capabilities to remote devices
- Digi's RealPort® COM port redirector provides transparent migration to network-based management
- SSHv2 for secure access
- Secure clustering allows multi-server access via one IP address
- Port buffering/logging for easy troubleshooting
- Email/pager alerts and SNMP traps
- Straight-through CAT5 cabling for easy server connection
- PC Card slot for increased flash, or additional ethernet/modem connection

Overview

The Digi CM allows IT administrators to securely monitor and control servers, routers, switches and other network devices from anywhere on the corporate TCP/IP network, over the Internet, or through dial-up modem connections. Users may configure and manage this equipment using Digi's best-in-class Web User Interface. Intuitive port naming and multi-level menuing make the Digi CM the easiest-to-use console server on the market.

In addition to serial port access, the Digi CM provides Digi's **freeKVM** technology. Through the same user interface, **freeKVM** enables remote graphical access to servers on the network without requiring any additional hardware and supports Remote Desktop Protocol (RDP), Virtual Network Computing (VNC) and X Window System. With the addition of **freeKVM**, users can concurrently manage multiple servers via a single interface without the cost, network overhead and performance penalties associated with KVM over IP.

Digi CM is equipped with a variety of popular security and authentication protocols and offers a rich assortment of management features that includes port logging, server clustering, email/pager/SNMP alerts and Automatic Device Recognition, which allows the unit to poll its attached devices and auto-configure itself with the device type, name and OS version. Its RemotePorts feature extends these capabilities by allowing users to centrally manage up to 48 remote devices, in addition to the native ports already available, without requiring a separate Digi console server at each physical location.

Features/Specifications

FEATURES

- Security
 - SSHv2 server and client, SSL, IP filtering
- Authentication
 - TACACS+, RADIUS, LDAP, Kerberos, local user database
- Management
 - Command line
 - Web – HTTP/HTTPS
 - SNMP
 - Port triggers and alerts
 - Multi-level menuing
- **freeKVM** for remote desktop access
- IPv6 capable
- Data capture via port buffering and logging (syslog, NFS, PC Card)
- Port access
 - Telnet/SSH with menuing, Reverse Telnet/SSH, HTTP/HTTPS
- Solaris Ready
- Multiple users per port
- Flash upgradeable
- SSH sessions simultaneously on all ports
- Secure clustering - single IP for multiple Digi CM devices
- IP addresses per port
- Standard CAT5 cabling for RJ-45 serial ports
- 19" rack mount kit included (16/32/48)

POWER REQUIREMENTS

- Digi CM 8**
- External 100-240VAC, 50/60 Hz, 12 W max, 6 W typical
- Digi CM 16/32/48**
- Internal 100-240VAC, 50/60 Hz, 40 W max, 12 W typical
 - Power supply MTBF: 11 years
 - 48VDC versions, 40 W max, 12 W typical

ENVIRONMENTAL

- Operating temperature: 5° C to 50° C (41° F to 122° F)
- Storage temperature: -30° C to 60° C (-20° F to 140° F)

REGULATORY APPROVALS

- FCC Part 15, A
- UL 1950, EN60950
- EN55022, A
- EN55024
- CE

OPERATING SYSTEMS

- Embedded Linux (Hard Hat Distribution)
- <http://cm.digi.com>

CONNECTORS

- 8, 16, 32 or 48 RJ-45 RS-232 serial ports
- 1 RJ-45 RS-232 console port
- 1 RJ-45 10/100Base-T Ethernet port

PC CARDS SUPPORTED

- CompactFlash memory card
 - Wireless LAN adapter (802.11b)
 - Ethernet LAN adapter
 - PSTN/CDMA modem card
- See <http://cm.digi.com> for more information

MEMORY

- 64 MB SDRAM
- 8 MB Flash
- 256 MB SDRAM (Digi CM 48)
- 16 MB Flash (Digi CM 48)

DIMENSIONS

- Digi CM 8**
- Length: 9.50 in (24.10 cm)
 - Depth: 1.25 in (3.20 cm)
 - Width: 6.25 in (15.90 cm)
 - Weight: 2.50 lbs (1.10 kg)


- Digi CM 16/32**
- Length: 17.00 in (43.20 cm)
 - Depth: 1.75 in (4.50 cm)
 - Width: 8.50 in (21.60 cm)
 - Weight: 5.80 lbs (2.60 kg)

- Digi CM 48**
- Length: 17.50 in (44.50 cm)
 - Depth: 1.75 in (4.50 cm)
 - Width: 10.00 in (25.40 cm)
 - Weight: 6.40 lbs (2.90 kg)

MODEL.....PART NUMBERS

Model	North America	International
Digi CM 8	70001931	70001932
Digi CM 16	70001910	70001911
Digi CM 16-VDC	70001938	70001938
Digi CM 32	70001908	70001909
Digi CM 32-VDC	70001937	70001937
Digi CM 48	70001949	70001950
Digi CM 48 Dual AC	70001951	70001952
Digi CM 48-VDC	70001953	70001953
Cable Adapters and Accessories		
Digi CM DB-25 Male Modem Adapter (8-pack)	76000670	76000670
Digi CM DB-9 Female Console Adapter (8-pack)	76000671	76000671
Digi CM DB-25 Male Console Adapter (8-pack)	76000672	76000672
Digi CM DB-25 Female Console Adapter (8-pack)	76000673	76000673
Digi CM Telco 23" Rack Mount Kit	76000689	76000689
19" Rack Mount Kit - Digi CM 8	76000705	76000705

RS-232 RJ-45 JACK



PIN SIGNAL

- 1 CTS
- 2 DSR
- 3 RxD
- 4 SAFETY GND
- 5 DCD
- 6 TxD
- 7 DTR
- 8 RTS

Microsoft
CERTIFIED
Partner



DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International

11001 Bren Road E.
Minnetonka, MN 55343
U.S.A.
PH: 877-912-3444
952-912-3444
FX: 952-912-4952
email: info@digi.com

Digi International France

31 rue des Poissonniers
92200 Neuilly sur Seine
PH: +33-1-55-61-98-98
FX: +33-1-55-61-98-99
www.digi.fr

Digi International KK

NES Building South 8F
22-14 Sakuragaoka-cho,
Shibuya-ku
Tokyo 150-0031, Japan
PH: +81-3-5428-0261
FX: +81-3-5428-0262
www.digi-intl.co.jp

Digi International (HK) Limited

Suite 1703-05, 17/F,
K Wah Centre
191 Java Road
North Point, Hong Kong
PH: +852-2833-1008
FX: +852-2572-9989
www.digi.cn

Digi International, the leader in device networking for business, develops reliable products and technologies to connect and securely manage local or remote electronic devices over the network or via the web. With over 20 million ports shipped worldwide since 1985, Digi offers the highest levels of performance, flexibility and quality.

www.digi.com

© 1999-2008 Digi International Inc.

Digi, Digi International, the Digi logo, the When Reliability Matters logo, Digi CM and freeKVM are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

WHEN
RELIABILITY
MATTERS™

91001129
11/208

