





# 40Gb/s QSFP+ MMF Optical Transceiver

### MC2210411-SR4E

Mellanox® MC2210411-SR4E is a 4-channel, pluggable, QSFP+, VCSEL-based (Vertical Cavity Surface Emitting Laser) optical transceiver designed for use in 40Gb/s networks operating at 4x10.3125Gb/s. This transceiver incorporates Mellanox integrated circuit technology, which combines high performance at low power. The transceiver operates over parallel multi-mode fiber (MMF), using a nominal wavelength of 850nm, and is SFF-8436 compliant.

MC2210411-SR4E transceiver has a standard QSFP+ connector on the electrical side towards the host system for power, control/monitoring and high-speed data. The optical interface is composed of four optical channels/fibers in each direction, intended for a parallel MMF cable via a standard MPO connector. The transceiver can operate at 10.3125Gb/s without retiming.

The transceiver provides digital diagnostic monitoring of supply voltage, temperature, transmit/receive power, and VCSEL bias.

Rigorous production testing ensures the best out-of-the-box installation experience, performance, and durability.

Table 1 - Absolute Maximum Ratings

| Parameter             | Min  | Max   | Units |
|-----------------------|------|-------|-------|
| Supply voltage        | -0.3 | 3.6   | V     |
| Data input voltage    | -0.3 | 3.465 | V     |
| Control input voltage | -0.3 | 4     | V     |
| Damage Threshold (a)  | 3.4  |       | dBm   |
| Storage temperature   | -40  | 85    | °C    |

Table 2 - Operational Information

| Parameter                           | Min   | Typical | Max   | Units |
|-------------------------------------|-------|---------|-------|-------|
| Supply voltage                      | 3.135 | 3.3     | 3.465 | V     |
| Power dissipation                   |       | 1.3     | 1.5   | W     |
| Supply noise tolerance (10Hz-10MHz) | 66    |         |       | mVpp  |
| Operating case temperature          | 0     |         | 70    | °C    |
| Operating relative humidity         | 5     |         | 85    | %RH   |



## HIGHLIGHTS

- 40Gb/s Ethernet and FDR10
- Programmable Tx input equalizer
- Programmable Rx output amplitude
- Programmable Rx output emphasis
- SFF-8436 compliant QSFP+
- Single 3.3V supply
- QSFP+ power class 1
- BER better than 1E-15
- Class 1 laser safety
- Up to 400m on OM4 and 300m on OM3 multi-mode fiber
- Digital diagnostic monitoring (DDM)
- Hot pluggable
- RoHS compliant
- IEEE 802.3 40GBASE-SR4 compliant
- SFF-8636 compliant I<sup>2</sup>C management interface

©2017 Mellanox Technologies. All rights reserved.



# **Mechanical Schematics**

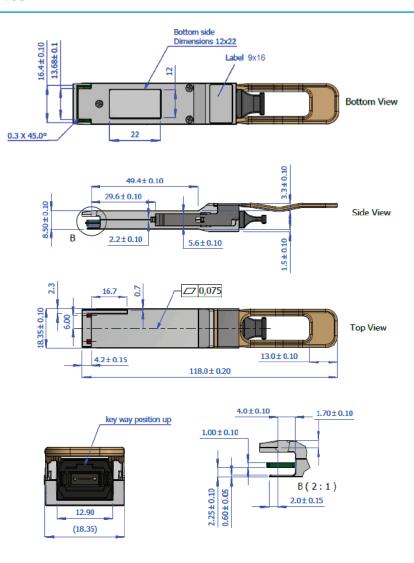


Table 3 - Part Number and Description

| OPN            | Description  |  |
|----------------|--|--|
| MC2210411-SR4E | Mellanox® optical module, 40Gb/s, QSFP, MPO, 850nm, up to 300m |  |

#### **Warranty Information**

Mellanox LinkX optical transceivers include a 1-year limited hardware warranty, which covers parts repair or replacement.



350 Oakmead Parkway, Suite 100, Sunnyvale, CA 94085 Tel: 408-970-3400 • Fax: 408-970-3403 www.mellanox.com