


AMPHENOL FCI Modular Connectors & Cable Assemblies Amphenol FCI

RoHS Compliant This page of product is RoHS compliant.

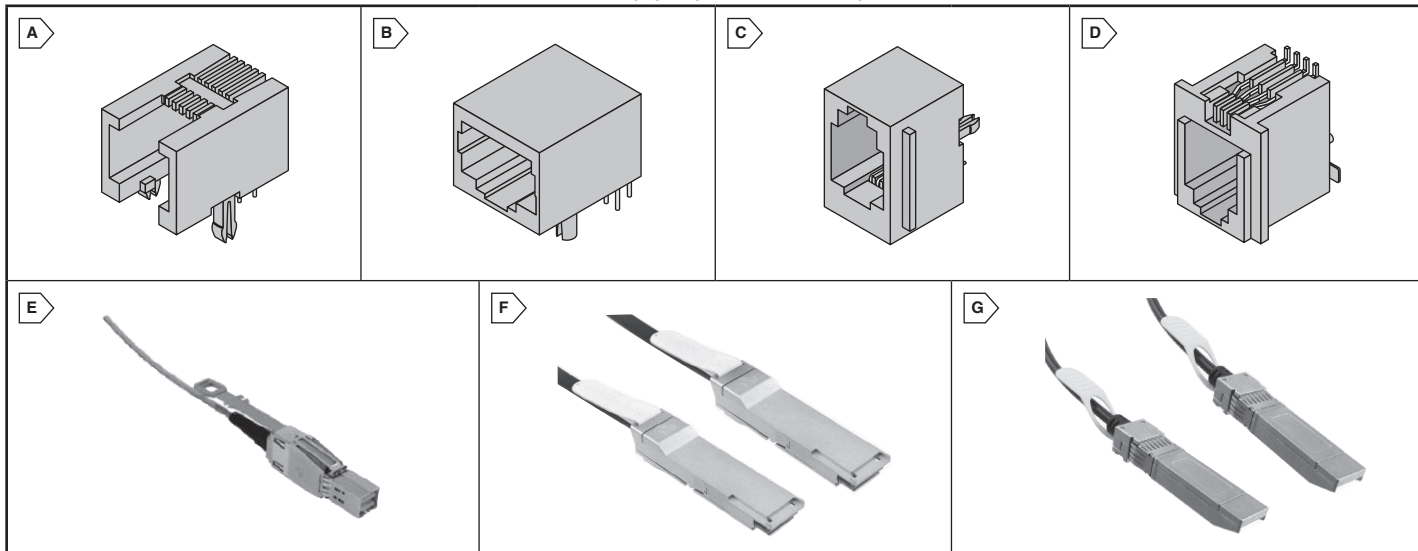

SINGLE PORT, CAT 3 MODULAR JACKS

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Amphenol FCI Part No.	Fig.	No. of Positions	Pegs	Shielded	Price Each			
						1	10	100	500
Horizontal-Through Mount									
649-87180-044LF	87180-044LF	A	4	Snap	No	1.28	1.13	.981	.802
649-87180-064LF	87180-064LF	A	6	Snap	No	1.28	1.13	.981	.802
649-87180-066LF	87180-066LF	A	6	Snap	No	1.40	1.24	1.07	.877
649-87180-088LF	87180-088LF	A	8	Snap	No	1.42	1.29	1.11	.925
649-54602-908LF	54602-908LF	B	8	Snap	No	.57	.536	.411	.358
649-54602-910LF	54602-910LF	B	10	Snap	No	.61	.579	.444	.386
Vertical-Through Mount									
649-61835-0441LF	61835-0441LF	C	4	Snap	No	.54	.513	.394	.342
649-90512-003LF	90512-003LF	C	6	Snap	No	.67	.628	.481	.419
649-69254-001LF	69254-001LF	C	6	Diamond	No	1.43	1.26	1.09	.893
649-90512-001LF	90512-001LF	C	6	Snap	No	1.40	1.24	1.07	.877
649-69255-001LF	69255-001LF	C	8	Diamond	No	1.45	1.31	1.13	.942
649-94152-088LF	94152-088LF	C	8	Snap	Yes	1.94	1.76	1.51	1.26
649-69254-002LF	69254-002LF	C	6	Diamond	No	1.30	1.15	.998	.816
Vertical-Surface Mount									
649-87545-4111LF	87545-4111LF	D	6	Surface Mount Peg	No	1.94	1.76	1.51	1.26
649-87547-4111LF	87547-4111LF	D	8	Surface Mount Peg	No	1.90	1.73	1.48	1.23

ACTIVE OPTICAL MINI-SAS HD CABLE ASSEMBLIES

- Temperature (Range): -5°C to +70°C
- Power Supply Voltage 3.3V
- Jacket Material: Low Smoke zero Halogen

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Amphenol FCI Part No.	Fig.	Cable Length (m)	Cable Diameters (mm)	Cable Type	Fiber Type	Jacket Color	Number of Fibers	Price Each
649-10123196-200L003	10123196-200L003	E	3	3	Jumper	OM2 50/125 Micron	Orange	8	484.00
649-10123196-200L005	10123196-200L005	E	5	3	Jumper	OM2 50/125 Micron	Orange	8	335.98
649-10123196-200L010	10123196-200L010	E	10	3	Jumper	OM2 50/125 Micron	Orange	8	445.31
649-10123196-200L020	10123196-200L020	E	20	3	Jumper	OM2 50/125 Micron	Orange	8	464.57
649-10123196-200S001	10123196-200S001	F	1	3	Jumper	OM2	Orange	8	356.99
649-10123196-200S003	10123196-200S003	F	3	3	Jumper	OM2	Orange	8	365.56
649-10123196-200S005	10123196-200S005	F	5	3	Jumper	OM2	Orange	8	374.13
649-10123196-200S010	10123196-200S010	F	10	3	Jumper	OM2	Orange	8	409.83

QSFP+ 4X, ROUND, LATCH-LOCK PLUGGABLE CABLES

- Cable Connectors: QSFP+ 4x
- Cable Type: Round
- Connector Type: Plug to Plug
- Current - Max/Contact: 0.5A
- Frequency - Max: 10 Gbps ~ 40Gbps
- Gender: Male to Male
- Number of Positions: 38
- Shielding: Shielded
- Usage: External
- Wire Gauge: 30 AWG ~ 26 AWG

For quantities greater than listed, call for quote.

MOUSER STOCK NO.	Amphenol FCI Part No.	Fig.	Cable Length (m)	Cable Diameters (mm)	Cable Type	Fiber Type	Jacket Color	Number of Fibers	Price Each
649-10093084-2010LF	10093084-2010LF	G	1	6.9	Shield	Twinax	Black	8	58.91
649-10093084-2020LF	10093084-2020LF	G	2	6.9	Shield	Twinax	Black	8	62.65
649-10093084-2030LF	10093084-2030LF	G	3	6.9	Shield	Twinax	Black	8	62.96
649-10110818-2020LF	10110818-2020LF	G	2	4.5	Shield	Twinax	Black	2	20.36
649-10116951-2010LF	10116951-2010LF	G	1	9.8	Shield	Twinax	Black	24	177.97