



by Schneider Electric

# Basic Rack PDU


## Overview

The American Power Conversion (APC®) Basic Rack Power Distribution Unit (PDU) distributes power to devices in the rack.

**Outlets.** The Rack PDU has twenty IEC-320-C13 outlets, and four IEC-320-C19 outlets.

**Power cord.** The 10-foot (3.05-meter) power cord terminates with a NEMA L6-30 connector.

## AP7541

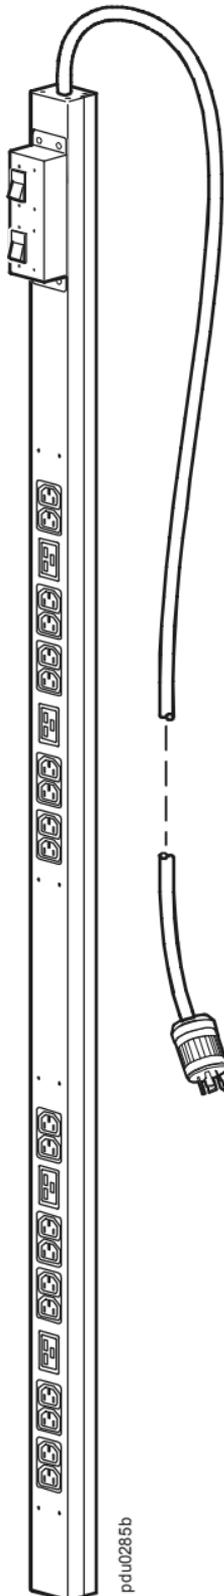

# Specifications

---

## Electrical

---

Input connector	NEMA L6-30 plug
Output connectors	20 – IEC-320-C13, 4 – IEC 320-C19 outlets
Nominal input voltage	200 – 240 VAC
Acceptable input voltage	± 10% of normal voltage
Input frequency	50/60 Hz
Maximum total current draw	30 A (24 A (UL(C-UL) derated)
Overcurrent protection (internal)	(2) 20-A, 2-pole circuit breakers

---

## Physical

---

Size (H × W × D)	63.75 × 2.19 × 1.73 in (161.92 × 5.56 × 4.39 cm)
Shipping Dimensions (H × W × D)	84.00 × 6.00 × 5.00 in (213.36 × 15.24 × 12.7 cm)
Weight	12.25 lb (5.56 kg)
Shipping weight	14.25 lb (6.46 kg)

---

## Environmental

---

Elevation (above MSL)	
Operating	0 – 10,000 ft (0 – 3000 m)
Storage	0 – 50,000 ft (0 – 15 000 m)
Temperature	
Operating	–5 to 45° C (23 to 115° F)
Storage	–25 to 65° C (–13 to 149° F)
Humidity	
Operating	5 – 95% RH non-condensing
Storage	5 – 95% RH non-condensing

---

## Compliance

---

Safety verification	UL (C-UL) listed, PSE
---------------------	-----------------------

---

Customer support and warranty information is available at the APC Web site, [www.apc.com](http://www.apc.com).

© 2009 APC by Schneider Electric. All trademarks are owned by Schneider Electric Industries S.A.S., American Power Conversion Corporation, or their affiliated companies.



**990-1894A**  
**04/2009**

